



# **BEA AMERICAS**

2022

REDEFINING ACCESSIBILITY & SAFETY


# LZR<sup>®</sup>-FLATSCAN 3D SW



BEA's LZR<sup>®</sup>-FLATSCAN 3D SW is a stand-alone, door-mounted safety system for swing doors. The four curtains create a three-dimensional detection pattern covering the door's entire pathway. The deep detection pattern reduces sudden door movements preventing contact with the user.

Instead of coordinating and wiring activation devices, utilize Virtual Push Buttons for a non-contact form of door activation. Convenient in settings that rely on hygienic solutions, like surgical environments.

[READ MORE ON PAGE 24](#)



**THREE-DIMENSIONAL  
FIELD DEPTH**



**COMPLETE  
OPENING COVERAGE**



**BUILT-IN KNOWING  
ACT DEVICE**



**STANDARDS  
COMPLIANCE**



## BEA AMERICAS

RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213



800 523 2462




[info-us@BEAsensors.com](mailto:info-us@BEAsensors.com)

# TABLE OF CONTENTS

|                       |            |
|-----------------------|------------|
| TECHNOLOGIES          | <b>5</b>   |
| FIND YOUR APPLICATION | <b>6</b>   |
| FIND YOUR SOLUTION    | <b>8</b>   |
| PRODUCTS              | <b>10</b>  |
| INDEX                 | <b>102</b> |




# TECHNOLOGIES



## LASER

Laser technology works according to the principle of Time-of-Flight. The sensor sends an intense light impulse in a defined direction and measures the time until the signal returns. As the speed of light is a constant value (approximately 300,000 km/s), this time is directly proportional to the distance between the sensor and the first object encountered by the light impulse.

As a result, and by sending multiple beams in multiple directions (2D or 3D), the sensor is capable of knowing the exact position of any object in its detection area at any given time.



## ACTIVE INFRARED WITH BACKGROUND ANALYSIS

Active infrared with background analysis technology works with a background (e.g. a sensor shines infrared light on the floor). In this case, the sensor lights up one or more areas and analyzes the energy that returns. Detection is triggered if there is any significant difference when compared to the original picture.



## ACTIVE INFRARED WITH BACKGROUND SUPPRESSION

Active infrared with background suppression technology works on the principle of "triangulation" in which the sensor calculates the distance between the emitter and receiver. The emission angle is already known and the reflection angle becomes the key element as the distance to the object can be calculated according to the position of the reflected spot on the receiver side (a triangle can be drawn when you know one distance and two angles).



## PASSIVE INFRARED

Passive infrared technology measures the infrared light radiating from objects in its field of view. Motion or presence is detected when an infrared source with one temperature, such as a human being, passes in front of an infrared source with another temperature, such as the normal environment.



## RADAR

Radar technology, also known as microwave technology, is based on the Doppler Effect: the radar sensor continuously emits microwaves with a certain frequency in a defined area. These microwaves are reflected back to the sensor by all of the objects present in its environment.



## PIEZO

Piezo technology, also known as piezoelectric, is the process of converting mechanical pressure (pushing a button) into electrical energy. A piezo switch is paired with a field effect transistor (FET) that, when pushed, allows current to flow through the FET.



## CAPACITIVE

Capacitive technology detects close-range electrically charged objects. A small voltage is applied to a conductive surface, resulting in a uniform electrostatic detection field. When a conductor, such as the human hand, enters this field, detection occurs.



## RADIO CONTROL FREQUENCY

Radio control frequency wireless technology uses transmitters and receivers operating on specific radio frequencies. The transmitter applies a radio frequency alternating current to an antenna, which then radiates radio waves. The receiver receives the transmitted frequency and converts the information into a usable form.



## VIDEO

Video technology uses optics and light to create pictures and videos. Enhanced definition cameras capture door environment and traffic usage in full color and high quality. Cameras are used within sensors to increase security and decrease liability.

# FIND YOUR APPLICATION

## PEDESTRIAN SENSING SOLUTIONS



LOW ENERGY DOORS



SLIDING DOORS



SWINGING DOORS



REVOLVING DOORS



AUTOMATED WINDOWS



ESCALATORS



KNOWING ACT DEVICES



SPEED LANES AND TURNSTILES

## INDUSTRIAL AUTOMATION SOLUTIONS



HIGH PERFORMANCE DOORS



COMMERCIAL DOORS



LOADING DOCKS



WAREHOUSING

## SECURITY & ACCESS SOLUTIONS



REQUEST-TO-EXIT



ACCESS CONTROL



ARTWORK PROTECTION



PERIMETER PROTECTION

## VEHICLE SENSING SOLUTIONS



GATES



BARRIERS



TOLL GATES



VEHICLE CLASSIFICATION



PARKING

## PUBLIC TRANSPORTATION SOLUTIONS



TRAIN, TRAM, AND SUBWAY DOORS



BUS DOORS



PLATFORM SCREEN DOORS



# FIND YOUR SOLUTION

## MOTION SENSORS

|                    |    |
|--------------------|----|
| COLIBRI            | 10 |
| EAGLE FAMILY       | 11 |
| FALCON FAMILY      | 12 |
| FALCON EX FAMILY   | 13 |
| PHOENIX EX™ FAMILY | 14 |
| SPARROW            | 15 |

## PRESENCE SENSORS

|                        |    |
|------------------------|----|
| BODYGUARD-T            | 16 |
| FLY KIT                | 17 |
| FOCUS FAMILY           | 18 |
| IS40P                  | 19 |
| IXIO-ST                | 20 |
| IXIO-ST INDUSTRIAL     | 21 |
| LZR®-FLATSCAN SW       | 22 |
| LZR®-FLATSCAN 3D SW    | 24 |
| LZR®-I30               | 26 |
| LZR®-MICROSCAN T       | 27 |
| LZR®-S600              | 29 |
| MICROCELL ONE          | 30 |
| R2E-100                | 31 |
| SUPERSCAN-T            | 32 |
| SUPERSCAN-T INDUSTRIAL | 33 |

## MOTION + PRESENCE SENSORS

|                     |    |
|---------------------|----|
| BEAMBOX             | 35 |
| IS40 / IS40 XL      | 38 |
| IXIO-DT1            | 39 |
| IXIO-DT1 INDUSTRIAL | 40 |
| IXIO-DT1 V          | 41 |
| LZR®-H100           | 25 |
| LZR®-WIDESCAN       | 44 |
| ULTIMO              | 45 |

## RAW DATA SENSORS

|                  |    |
|------------------|----|
| LZR®-U920 / U921 | 46 |
|------------------|----|

## LOGIC MODULES

|         |    |
|---------|----|
| BR2-900 | 48 |
|---------|----|

|                  |    |
|------------------|----|
| BR3-X            | 49 |
| LOCK-OUT MODULES | 50 |

## LOOP DETECTORS

|               |    |
|---------------|----|
| MATRIX FAMILY | 51 |
|---------------|----|

## WIRELESS

|                |    |
|----------------|----|
| 300 MHZ FAMILY | 52 |
| 433 MHZ FAMILY | 53 |
| 900 MHZ FAMILY | 54 |
| BR2-900        | 48 |
| PANTHER        | 61 |

## PUSH PLATES

|                            |    |
|----------------------------|----|
| 4.5 INCH, ROUND AND SQUARE | 56 |
| 4.75 INCH, SQUARE          | 57 |
| 6 INCH, ROUND AND SQUARE   | 58 |
| JAMB                       | 59 |
| LPR36                      | 60 |
| PANTHER                    | 61 |
| SINGLE GANG                | 62 |
| VESTIBULE                  | 63 |

## TOUCHLESS SOLUTIONS

|      |    |
|------|----|
| MS09 | 64 |
| MS21 | 65 |
| MS31 | 66 |
| MS41 | 68 |

## ACCESS CONTROL

|                            |    |
|----------------------------|----|
| ACCESS CONTROL PUSH BUTTON | 69 |
| BR3-X                      | 49 |
| CABINET LOCK               | 70 |
| DELAYED EGRESS MAGLOCK KIT | 71 |
| ELECTRIC STRIKES           | 72 |
| FLY KIT                    | 17 |
| KEYSWITCHES                | 74 |
| PIEZO BUTTON               | 75 |
| PNEUMATIC PUSH BUTTONS     | 76 |
| UL LISTED GATELOCKS        | 77 |

|                                |        |                                  |     |
|--------------------------------|--------|----------------------------------|-----|
| MAGLOCKS                       | 80, 82 | PUSH PLATE 6R-433                | 91  |
| MAGLOCKS WITH DS               | 81, 83 | PUSH PLATE 6R-900                | 91  |
| UNIVERSAL KEYPAD FAMILY        | 84     | PUSH PLATE 6R-BR2900             | 91  |
| LZR®-5600                      | 29     | PUSH PLATE JAMB-433              | 91  |
|                                |        | PUSH PLATE JAMB-900              | 91  |
|                                |        | VESTIBULE PACKAGE 433            | 91  |
|                                |        | VESTIBULE PACKAGE 900            | 91  |
| <b>INDICATORS</b>              |        | <b>REQUEST-TO-EXIT</b>           |     |
| LED SIGNAL COLUMN LIGHTS       | 85     | 10ACP6DS                         | 92  |
| LED SIGNAL MODULAR LIGHTS      | 86     | 10ACP6FDS                        | 92  |
| LED SIGNAL TRAFFIC LIGHTS      | 87     | 10ACP12DS                        | 92  |
|                                |        | 10ACP12FDS                       | 92  |
| <b>PACKAGES</b>                |        | <b>SINGLE OCCUPANCY RESTROOM</b> |     |
| <b>ACCESS CONTROL</b>          |        | EMERGENCY ADD-ON KIT             | 93  |
| 10ACP6                         | 88     | RESTROOM KIT                     | 94  |
| 10ACP6F                        | 88     |                                  |     |
| 10ACP12                        | 88     | <b>SWING DOORS</b>               |     |
| 10ACP12F                       | 88     | PARALLAX I                       | 95  |
|                                |        | PARALLAX II                      | 95  |
| <b>LOW-ENERGY REACTIVATION</b> |        | PARALLAX DE                      | 95  |
| LE PACKAGE                     | 89     | PARALLAX II DE LITE              | 95  |
| LE PACKAGE 6                   | 89     |                                  |     |
| LE PACKAGE 6 SECURITY          | 89     | <b>ACCESSORIES</b>               |     |
|                                |        | BOLLARDS                         | 96  |
| <b>PUSH PLATE</b>              |        | MOUNTING BOX EBA                 | 97  |
| PANTHER 1                      | 90     | DOOR PRESSURE GAUGE              | 98  |
| PANTHER 2                      | 90     | ISOLATION RELAYS                 | 98  |
| PUSH PLATES 1                  | 90     | MAGNETIC, DOOR POSITION SWITCH   | 98  |
| PUSH PLATES 2                  | 90     | ON / OFF / HOLD OPEN SWITCH      | 98  |
| PUSH PLATES 3                  | 90     | SPOTFINDER                       | 98  |
| PUSH PLATES 4                  | 90     | UNIVERSAL REMOTE CONTROL         | 98  |
| PUSH PLATES 45                 | 90     | JAMB CAM                         | 99  |
| PUSH PLATES 45 900             | 90     | POWER SUPPLIES & TRANSFORMERS    | 100 |
| VESTIBULE 900                  | 90     |                                  |     |
| VESTIBULE PACKAGE              | 90     |                                  |     |
| VESTIBULE PACKAGE 9V           | 90     |                                  |     |
| <b>SECURITY PUSH PLATE</b>     |        |                                  |     |
| PUSH PLATE 45S-433             | 91     |                                  |     |
| PUSH PLATE 45S-900             | 91     |                                  |     |
| PUSH PLATE 45S-BR2900          | 91     |                                  |     |
| PUSH PLATE 45S-HW              | 91     |                                  |     |
| PUSH PLATE 475 EBA-900         | 91     |                                  |     |
| PUSH PLATE 475S-433            | 91     |                                  |     |
| PUSH PLATE 475S-900            | 91     |                                  |     |
| PUSH PLATE 475S-BR2900         | 91     |                                  |     |
| PUSH PLATE 475S-HW             | 91     |                                  |     |



# COLIBRI ONE



UNIDIRECTIONAL MOTION SENSOR FOR OFF-DOOR APPLICATIONS

## Customizable Settings

Variable sensitivity adjustment provides different detection areas

## Variable Mounting

Lateral angle adjustment for ceiling-, wall-, and low-level mount versatility



## Compact, Low Profile

Compact size provides flexibility in mounting

## Ideal For Off-Door Applications

Pairs with LED SIGNAL LIGHTS for warning indication applications



## TECHNICAL SPECIFICATIONS

|                                   |   |
|-----------------------------------|---|
| <b>Technology</b>                 | Microwave Doppler radar                                   |
| <b>Detection Mode</b>             | Motion  |
| <b>Transmitter Frequency</b>      | 24.150 GHz  |
| <b>Transmitter Radiated Power</b> | < 20 dBm EIRP   |
| <b>Transmitter Power Density</b>  | < 5 mW / cm <sup>2</sup>                                  |
| <b>Min. Detection Speed</b>       | 2 in/s (measured in sensor axis)                          |
| <b>Supply Voltage</b>             | 12 – 24 VDC 30% / -10%                                    |
| <b>Mains Frequency</b>            | 50 – 60 Hz  |
| <b>Max. Power Consumption</b>     | < 2 W   |
| <b>Output</b>                     | Solid-state-relay (free of potential change-over contact) |
| Max. Contact Current              | 100 mA  |
| Max. Contact Voltage              | 35 VDC / 24 VAC   |
| <b>Mounting Height</b>            | 6 – 10'   |
| <b>Degree of Protection</b>       | IP54  |
| <b>Temperature Range</b>          | -4 – 131 °F   |
| <b>Dimensions</b>                 | 3 1/8" (W) x 2 3/8" (H) x 2 1/8" (D)                      |
| <b>Tilt Angles</b>                | 0 – 90° vertical; -30 – 30° lateral                       |
| <b>Materials</b>                  | ABS, PC   |
| <b>Weight</b>                     | 5 oz  |
| <b>Cable Length</b>               | 8'  |
| <b>Norm Conformity</b>            | R&TTE 1999 / 5 / EC<br>EMC 2004 / 108 / EC                |

## PRODUCT SERIES

|                   |               |
|-------------------|---------------|
| <b>10COLIBRI1</b> | Motion sensor |
|-------------------|---------------|



# EAGLE FAMILY

MOTION SENSOR FOR AUTOMATIC DOORS

## Save on Energy Costs





Energy savings as a result of unidirectional detection capability

## Adjustable

Narrow and wide antennae included

## Eliminates False Detections

Immunity settings can be adjusted to reduce unwanted detections caused by rain, snow, and header vibrations



## Versatile

Motion detection feature capable of detecting traffic moving as slowly as two inches per second

## Aesthetically Pleasing Design

Compact, low-profile design

## Accessories Available

Variety of mounting accessories available, including our spacer accessory with integrated camera

## TECHNICAL SPECIFICATIONS

|                                   |  |
|-----------------------------------|--|
| <b>Technology</b>                 | Microwave and microprocessor                                     |
| <b>Detection Mode</b>             | Motion   |
| <b>Transmitter Frequency</b>      | 24.150 GHz   |
| <b>Transmitter Radiated Power</b> | < 20 dBm EIRP  |
| <b>Transmitter Power Density</b>  | < 5mW / cm <sup>2</sup>  |
| <b>Minimum Detection Speed</b>    | 2 in/s (measuring based on optimal conditions)                   |
| <b>Mounting Height</b>            |  |
| EAGLE                             | 6' – 13'   |
| EAGLE HM                          | 10' – 16'6"  |
| <b>Supply Voltage</b>             | 12 – 24 VAC ±10%<br>12 – 24 VDC 30% / -10%                       |
| <b>Mains Frequency</b>            | 50 – 60 Hz   |
| <b>Maximum Power Consumption</b>  | < 2 W  |
| <b>Output</b>                     | Relay (free of potential change-over contact)                    |
| Max. Contact Voltage              | 42 VAC/VDC   |
| Max. Contact Current              | 1 A (resistive)  |
| Max. Switching Power              | 30 W (DC) / 60 VA (AC)   |
| <b>Cable Length</b>               |  |
| EAGLE                             | 8'   |
| EAGLE HM                          | 30'  |
| <b>Degree of Protection</b>       | IP54   |
| <b>Temperature Range</b>          | -4 – 131 °F  |
| <b>Dimensions</b>                 | 4 7/10" (L) × 3 7/10" (H) × 2" (W)                               |
| <b>Material</b>                   | ABS  |
| <b>Weight</b>                     | 7.6 oz   |
| <b>Tilt Angles</b>                | 0 – 90° vertical; -30 – 30° lateral                              |
| <b>Norm Conformity</b>            | R&TTE 1999 / 5 / EC<br>LVD 2006 / 95 EC<br>RoHs 2 2011 / 65 / EU |

## PRODUCT SERIES

|                       |   |
|-----------------------|---|
| <b>10EAGLE</b>        | Microwave motion sensor                                   |
| <b>10EAGLE1HM</b>     | Microwave motion sensor (high-mount for industrial doors) |
| <b>10EAGLESPACER</b>  | EAGLE spacer  |
| <b>10EAGLESPACERV</b> | EAGLE spacer with integrated camera                       |
| <b>10ECA</b>          | Flush mount, ceiling adapter for EAGLE                    |
| <b>10EMB</b>          | EAGLE mounting bracket                                    |
| <b>10ERA</b>          | EAGLE rain cover (standard)                               |
| <b>10ERC</b>          | EAGLE rain cover (deluxe)                                 |
| <b>10EQD</b>          | Quick-disconnect harness for EAGLE sensor                 |
| <b>10INDBRACKET</b>   | Industrial mounting bracket                               |
| <b>10MINIBRACKET</b>  | Short, adjustable mounting bracket                        |
| <b>10REMOTE</b>       | Universal remote control for sensor setup                 |
| <b>20.0027</b>        | EAGLE cable (6', 4-conductor)                             |
| <b>70.0164</b>        | Microwave antenna bezel cover for EAGLE sensors           |
| <b>70.0167</b>        | Black EAGLE replacement cover                             |
| <b>66.0098</b>        | Silver EAGLE replacement cover                            |
| <b>70.0173</b>        | EAGLE wide antenna  |
| <b>70.0182</b>        | EAGLE narrow antenna                                      |



# FALCON FAMILY

MOTION SENSOR FOR INDUSTRIAL DOORS,  
GATES, AND WARNING INDICATION

## Energy Savings

Bidirectional + unidirectional approach and unidirectional depart microwave detection options

## Adjustable Detection Settings

Six modes of detection filtering for pedestrian and parallel traffic rejection

## Adjustable Angle

Tilt angle from zero to 180°





## Remote Control Adjustments

Remote control programming enables user to quickly and safely make changes from the ground

## Rated For Harsh Environments

IP65-rated enclosure

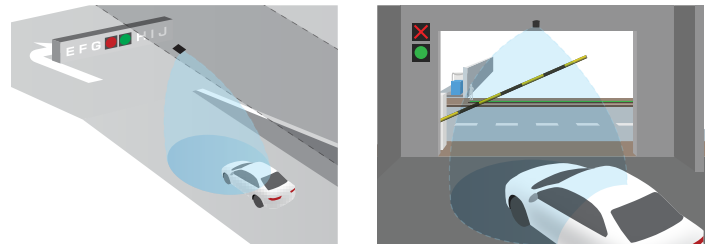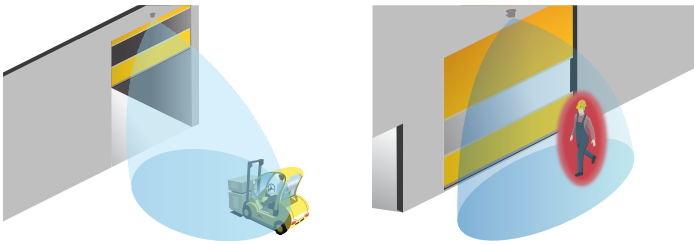

## TECHNICAL SPECIFICATIONS

|                                |   |
|--------------------------------|---|
| <b>Technology</b>              | Microwave Doppler radar                       |
| Radiated Frequency             | 24.150 GHz                                    |
| Transmitter Radiated Frequency | < 20 dBm EIRP                                 |
| Radiated Power Density         | < 5 mW / cm <sup>2</sup>                      |
| <b>Detection Mode</b>          | Motion  |
| <b>Detection Zone</b>          |   |
| FALCON                         | 13' x 16' at 16'                              |
| FALCON XL                      | 13' x 6 1/2' at 8 1/2'                        |
| FALCON WIDE                    | 30' x 11' at 21'                              |
|                                | Typical at 30° and field size 9               |
| <b>Tilt Angles</b>             | 0 – 180°                                      |
| <b>Output</b>                  | Relay (free of potential change-over contact) |
| Max. Contact Voltage           | 42 VAC/VDC                                    |
| Max. Contact Current           | 1 A (resistive)                               |
| Max. Switching Power           | 30 W (DC); 60 VA (AC)                         |
| <b>Minimum Detection Speed</b> | 2 in/s*                                       |
| <b>Mains Frequency</b>         | 50 – 60 Hz                                    |
| <b>Supply Voltage</b>          | 12 – 24 VAC; ±10%                             |
|                                | 12 – 24 VDC; 30% / -10%                       |
| <b>Power Consumption</b>       | < 2 W   |
| <b>Mounting Height</b>         |   |
| FALCON                         | 11 1/2 – 23'                                  |
| FALCON XL                      | 6 1/2 – 11 1/2'                               |
| FALCON WIDE                    | 11 1/2 – 21'                                  |
| <b>Dimensions</b>              | 3 3/4" (W) x 4" (H) x 5" (L)                  |
| <b>Materials</b>               | ABS, PC                                       |
| <b>Temperature Range</b>       | -22 – 140 °F                                  |
| <b>Degree of Protection</b>    | IP65  |
| <b>Norm Conformity</b>         | EMC: 2004 / 108 / EC<br>R&TTE: 1999 / 5 / EC  |

\* Measured in optimal conditions

## PRODUCT SERIES

|                      |   |
|----------------------|---|
| <b>10FALCON</b>      | Industrial motion detector (11 1/2 – 23' high mount)                            |
| <b>10FALCONW</b>     | Industrial motion detector with wide detection fields (11 1/2 – 21' high mount) |
| <b>10FALCONXL</b>    | Industrial motion detector for low mounting (6 1/2 – 11 1/2' high mount)        |
| <b>10INDBRACKET</b>  | Industrial mounting bracket   |
| <b>10MINIBRACKET</b> | Short, adjustable mounting bracket  |
| <b>10WBA</b>         | Universal mounting bracket arm  |
| <b>10WBAMOUNT</b>    | Universal mounting bracket plate  |
| <b>10REMOTE</b>      | Universal remote control for sensor setup                                       |
| <b>20.5365</b>       | FALCON harness (100')   |
| <b>35.1568</b>       | FALCON harness (30')  |



# FALCON EX FAMILY

MOTION SENSOR WITH EXPLOSION-PROOF AND FLAME-PROOF HOUSING



## Energy Savings

Bidirectional + unidirectional approach and unidirectional depart microwave detection options

## Adjustable Detection Settings





Six modes of detection filtering for pedestrian and parallel traffic rejection

## Easy to Program

Remote control programming enables user to quickly and safely make changes from the ground

## Explosion-proof and Highly Durable

Explosion-proof and flame-proof housing weighs 11 pounds

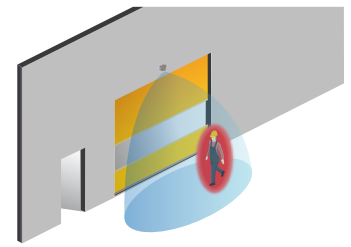

## TECHNICAL SPECIFICATIONS

|                                  |   |
|----------------------------------|---|
| <b>Technology</b>                | Microwave Doppler radar                       |
| Radiated Frequency               | 24.150 GHz                                    |
| Transmitter Radiated Frequency   | < 20 dBm EIRP                                 |
| Radiated Power Density           | < 5 mW / cm <sup>2</sup>                      |
| <b>Detection Mode</b>            | Motion  |
| <b>Detection Zone</b>            |   |
| FALCON EX                        | 13' x 16' at 16'                              |
| FALCON EX XL                     | 13' x 6½' at 8½'                              |
| FALCON EX WIDE                   | 30' x 11' at 21'                              |
|                                  | Typical at 30° and field size 9               |
| <b>Tilt Angles</b>               | -90 – 30° in elevation                        |
| <b>Output</b>                    | Relay (free of potential change-over contact) |
| Max. Contact Voltage             | 42 VAC/VDC                                    |
| Max. Contact Current             | 1 A (resistive)                               |
| Max. Switching Power             | 30 W (DC); 60 VA (AC)                         |
| <b>Minimum Detection Speed</b>   | 2 in/s  |
| <b>Mains Frequency</b>           | 50 – 60 Hz                                    |
| <b>Supply Voltage</b>            | 12 – 24 VAC; ±10%<br>12 – 24 VDC; 30% / -10%  |
| <b>Maximum Power Consumption</b> | < 2 W   |
| <b>Mounting Height</b>           |   |
| FALCON EX                        | 11 ½ – 23'                                    |
| FALCON EX XL                     | 6 ½ – 11 ½'                                   |
| FALCON EX WIDE                   | 11 ½ – 21'                                    |
| <b>Dimensions</b>                |   |
| Housing and Bracket              | 5 ½" (L) x 7 ½" (W) x 9" (H)                  |
| <b>Electrical Access</b>         |   |
| NPT Pipe Thread                  | ¾"  |
| <b>Weight</b>                    | 10 lbs  |
| <b>Cable Length</b>              | See User's Guide for reference                |
| <b>Materials</b>                 | Copper-free Aluminum, Aluminum                |
| <b>Temperature Range</b>         | -22 – 140 °F                                  |
| <b>Housing Certification*</b>    | See User's Guide                              |
| <b>Norm Conformity</b>           | EMC: 2004 / 108 / EC<br>R&TTE: 1999 / 5 / EC  |

## PRODUCT SERIES

|                        |  |
|------------------------|--|
| <b>10FALCONEX100</b>   | Industrial motion detector with 100' harness (11 ½ – 23' high mount)                           |
| <b>10FALCONEXW100</b>  | Industrial motion detector with wide detection fields and 100' harness (11 ½ – 21' high mount) |
| <b>10FALCONEXXL100</b> | Industrial motion detector for low mounting with 100' harness (6 ½ – 11 ½' high mount)         |
| <b>10INDBRACKET</b>    | Industrial mounting bracket  |
| <b>10REMOTE</b>        | Universal remote control for sensor setup  |
| <b>20.5365</b>         | FALCON harness (100')  |
| <b>35.1568</b>         | FALCON harness (30')   |

\* Adalet / Scott Fetzer Co., UL Listing #E81696



# PHOENIX EX™ FAMILY



MOTION SENSOR WITH EXPLOSION-PROOF AND FLAME-PROOF HOUSING FOR INTRUSION PROTECTION

## Energy Savings

Bidirectional + unidirectional approach and unidirectional depart microwave detection options

## Tamper Proof

Integrated, tamper alert switch and end-of-line resistors



## TECHNICAL SPECIFICATIONS

|                                  |   |
|----------------------------------|---|
| <b>Technology</b>                | Microwave Doppler radar   |
| Transmitter Frequency            | 24.150 GHz  |
| Transmitter Radiated Power       | < 20 dBm EIRP   |
| Transmitter Power Density        | < 5 mW / cm <sup>2</sup>  |
| <b>Detection Mode</b>            | Motion  |
| <b>Output*</b>                   | Relay (free of potential change-over contact)   |
| Maximum Contact Voltage          | 42 VAC/VDC  |
| Maximum Contact Current          | 1 A (resistive)   |
| Maximum Switching Power          | 30 W (DC); 60 VA (AC)   |
| <b>Anti-Tamper Feature</b>       |   |
| PHOENIX EX                       | 1) product anti-tamper (magnetic switch within cover, alerts when cover is unscrewed)<br>2) application-based anti-tamper (tamper alert via end-of-line resistor) |
| PHOENIX EX-IT                    | Tamper alert via output   |
| <b>Minimum Detection Speed</b>   | 2 in/s*   |
| <b>Supply Voltage</b>            | 12 – 24 VAC; ±10%<br>12 – 24 VDC; 30% / -10%  |
| <b>Mains Frequency</b>           | 50 – 60 Hz  |
| <b>Maximum Power Consumption</b> | < 2 W   |
| <b>Electrical Access</b>         | ¾"  |
| <b>Cable Length</b>              | 30' or 100' (default), diameter ¼" max  |
| <b>Detection Zone</b>            |   |
| PHOENIX EX                       | 13' x 16' at 16'  |
| PHOENIX EX XL                    | 13' x 16 ½' at 8 ½'   |
| PHOENIX EX WIDE                  | 30' x 11' at 21'<br>Typical at 30° and field size 9   |
| <b>Mounting Height</b>           |   |
| PHOENIX EX                       | 11 ½ – 23'  |
| PHOENIX EX XL                    | 6 ½ – 11 ½'   |
| PHOENIX EX WIDE                  | 11 ½ – 21'  |
| <b>Dimensions</b>                |   |
| Housing and Bracket              | 5 ½" (H) x 7 ½" (W) x 9" (L)  |
| <b>Weight</b>                    | 10 lbs  |
| <b>Temperature Range</b>         | -22 – 140 °F  |
| <b>Housing Certification***</b>  | See User's Guide  |
| <b>Norm Conformity</b>           | EMC: 2004 / 108 / EC<br>R&TTE: 1999 / 5 / EC  |




## Certified Housing

Explosion-proof and flame-proof housing, weighs 10 pounds

## Customizable Detection Angle

Tilt adjustment angle: -90 to 30° in elevation



## PRODUCT SERIES

|                            |  |
|----------------------------|--|
| <b>10PHOENIXEX100</b>      | Industrial motion detector with 100' harness (11 ½ – 23' high mount)                           |
| <b>10PHOENIXEXXL100</b>    | Industrial motion detector for low mounting with 100' harness (6 ½ – 11 ½' high mount)         |
| <b>10PHOENIXEXW100</b>     | Industrial motion detector with wide detection fields and 100' harness (11 ½ – 21' high mount) |
| <b>10PHOENIXEX-IT100</b>   | Industrial motion detector with 100' harness (11 ½ – 23' high mount)                           |
| <b>10PHOENIXEXXL-IT100</b> | Industrial motion detector for low mounting with 100' harness (6 ½ – 11 ½' high mount)         |
| <b>10PHOENIXEXW-IT100</b>  | Industrial motion detector with wide detection fields and 100' harness (11 ½ – 21' high mount) |
| <b>10REMOTE</b>            | Universal remote control for sensor setup  |

**CONTACT YOUR BEA SALES REPRESENTATIVE FOR PHOENIX EX™ ORDERING INFORMATION.**

\* Measured in optimal conditions

\*\* Output ratings may vary depending on optional end-of-line resistor values

\*\*\* Adalet / Scott Fetzer Co., UL Listing #E81696



# SPARROW

VARIABLE MOUNT, INDUSTRIAL MOTION SENSOR




## Flexible Mounting

Mounting height from 6 ½ feet to 20 feet

## Adjustable For Optimal Detection

Ten sensor-sensitivity settings can be applied to optimize detection

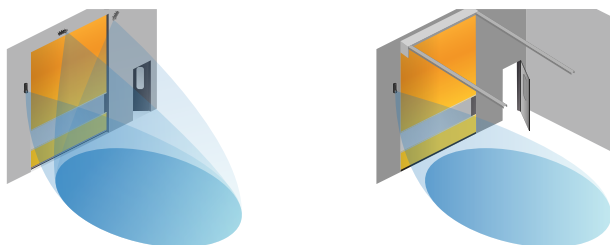


## Weather Resistant

IP64-rated enclosure for industrial and harsh environments

## Customizable Settings

Immunity settings can be adjusted to reduce unwanted detections caused by rain, snow, and header vibrations

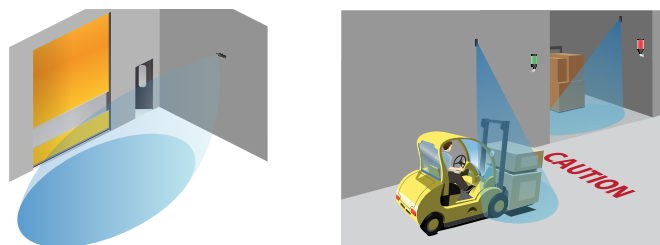

## TECHNICAL SPECIFICATIONS

|                                  |   |
|----------------------------------|---|
| <b>Technology</b>                | Microwave Doppler radar                       |
| Transmitter Frequency            | 24.150 GHz                                    |
| Transmitter Radiated Power       | < 20 dBm EIRP                                 |
| Transmitter Power Density        | < 5 mW / cm <sup>2</sup>                      |
| <b>Detection Mode</b>            | Motion  |
| <b>Tilt Angle</b>                | 0 – 90° vertical;<br>-120 – 120° lateral      |
| <b>Output</b>                    | Relay (free of potential change-over contact) |
| Max. Contact Voltage             | 42 VAC – 60 VDC                               |
| Max. Contact Current             | 1 A (resistive)                               |
| Max. Switching Power             | 30 W (DC) / 60 VA (AC)                        |
| <b>Minimum Detection Speed</b>   | 2 in/s (measured in the sensor axis)          |
| <b>Frequency</b>                 | 50 – 60 Hz                                    |
| <b>Supply Voltage</b>            | 12 – 24 VAC ±10%<br>12 – 24 VDC; 30% / -10%   |
| <b>Maximum Power Consumption</b> | < 2 W   |
| <b>Mounting Height</b>           | 6 ½ – 20'                                     |
| <b>Dimensions</b>                | 5 ½" (L) × 2 ¼" (H) × 2 ½" (W)                |
| <b>Material</b>                  | ABS   |
| <b>Color</b>                     | Black   |
| <b>Weight</b>                    | 5.8 oz  |
| <b>Cable Length</b>              | 30'   |
| <b>Temperature Range</b>         | -22 – 140 °F                                  |
| <b>Degree of Protection</b>      | IP64  |
| <b>Norm Conformity</b>           | R&TTE 1999 / 5 / EC<br>EMC 2004 / 108 / EC    |

## PRODUCT SERIES

|                     |   |
|---------------------|---|
| <b>10SPARROW</b>    | Variable-mount motion sensor              |
| <b>10REMOTE</b>     | Universal remote control for sensor setup |
| <b>10INDBRACKET</b> | Industrial mounting bracket               |





# BODYGUARD-T

OVERHEAD PRESENCE SENSOR FOR AUTOMATIC DOORS

## Overhead Presence Sensor


Versatile sensor can be used on single swing, simultaneous pair, dual egress, and folding doors when coupled with an interface / lockout device

## Tailor For Application Needs

Adjustable tilt angle from zero to 10°


## Visible Indication

Visible LED indicates connection between sensor and door control

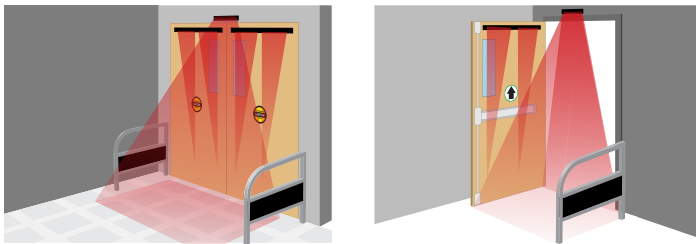

## TECHNICAL SPECIFICATIONS

|                                       |   |
|---------------------------------------|---|
| <b>Technology</b>                     | Active infrared                                       |
| <b>Detection Mode</b>                 | Presence  |
| <b>Installation Height (variable)</b> | 9' 0" maximum (recommended: 6' 6" – 8' 0")            |
| <b>Mounting Angles</b>                |   |
| BODYGUARD Only                        | 5°, 10° (factory default setting: 5°)                 |
| With BODYMOUNT                        | 0°, 5°, 10°   |
| <b>Power Supply</b>                   | 12 – 24 VAC/VDC ±10%                                  |
| <b>Frequency</b>                      | 50 – 60 Hz  |
| <b>Output</b>                         |   |
| Max. Contact Voltage                  | 60 VDC / 125 VAC                                      |
| Max. Contact Current                  | 1 A   |
| Max. Power Supply                     | 30 W (DC), 60 VA (AC)                                 |
| <b>Relay Hold Time</b>                | 0.5 – 9 s   |
| <b>Operating Temperature</b>          | -22 – 140 °F  |
| <b>Immunity</b>                       | Immune to electrical and radio frequency interference |
| <b>Cable</b>                          | 4'  |
| <b>Weight</b>                         | 1 lb 11 oz  |
| <b>Dimensions</b>                     | 12" (W) × 2" (H) × 2" (D)                             |
| <b>Materials</b>                      | Aluminum, ABS   |
| <b>Housing</b>                        | Black anodized aluminum                               |

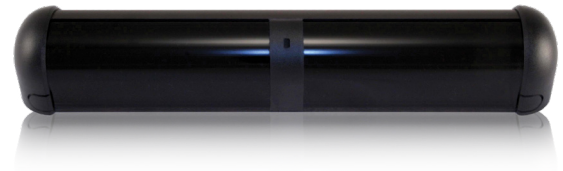

## Customized Detection

Separate pattern width, depth, and sensitivity for open- and closed-door states provide maximum flexibility

## Standards Compliant

Fully monitored internally; capable of external monitoring

## PRODUCT SERIES

|                       |   |
|-----------------------|---|
| <b>10BODYGUARDT</b>   | Header-mounted, safety sensor                                       |
| <b>10BODYMNT</b>      | Spacer for BODYGUARD-T  |
| <b>10BGQD</b>         | Quick-disconnect cable for BODYGUARD-T (78")                        |
| <b>10CAPKIT</b>       | (1) left / (1) right end cap and mounting screws                    |
| <b>10HORTONSSHARN</b> | BODYGUARD-T / SUPERSCAN-T relay harness for use with Horton Control |
| <b>10LO21</b>         | Lock-out modules<br><i>see page 50 for more information</i>         |
| <b>10REMOTE</b>       | Universal remote control for sensor setup                           |
| <b>10URC</b>          | Universal rain cover for BODYGUARD-T                                |
| <b>15.0075</b>        | Harness for LO21 and LO21P  |
| <b>20.2015</b>        | BODYGUARD-T light pipe and cover for light pipe                     |
| <b>20.5384</b>        | 8-conductor harness, 4 ½'   |
| <b>30.0345</b>        | 7-position, female pin connector                                    |
| <b>41.3879</b>        | Adjustable mounting clips for PCB                                   |
| <b>70.0045</b>        | Extrusion housing cut to 10 ¼"                                      |
| <b>70.0207</b>        | BODYGUARD-T lens cut to 4 ¾"  |



# FLY KIT

COMPACT, PASSIVE INFRARED REQUEST-TO-EXIT SENSOR

## Precise Infrared Detection

Sensing field adjustment masks provide accurate detection zones (two included)

## Customizable

DIP switches for user-defined settings



## TECHNICAL SPECIFICATIONS

|   |   |
|---|---|
| <b>Technology</b>   | Passive infrared with microprocessor  |
| <b>Mounting Height</b><br>Recommended                             | 6 ½ – 8’ (max. 10’)   |
| <b>Mounting Angles</b>  | 0 – 180°  |
| <b>Power Supply</b>   | 12 – 24 VAC ±10% 50/60 Hz<br>12 – 24 VDC -10% / 30%   |
| <b>Current Consumption</b>  | < 10 mA (20 mA if the relay output is activated)  |
| <b>Contact Rating</b>   | 1 A / 75 VDC or 50 VAC potential free contact<br>NO / NC  |
| <b>Optical Characteristics</b>                                    | Passive infrared with four elements<br>15 Fresnel lenses with full independent<br>masking possibilities |
| <b>Warm-up Time</b>   | 10 s  |
| <b>Response Time</b>  | 200 ms (max)  |
| <b>Relay Hold Time</b><br>Standard Fly<br>Fly Extended Relay Time | 0.5 or 2 s<br>15 or 30 s  |
| <b>Operating Temperature</b>                                      | -22 – 140 °F (-30 – 55 °C)  |
| <b>Cable</b>  | 9’ 4-conductor cable with 5-pin connector   |
| <b>Weight</b>   | 1.4 oz (40 g)   |
| <b>Sensor Dimensions</b>  | 4” (W) × 1 ½” (H) × 1” (D)  |
| <b>Housing Color</b>  | Black   |



## Adjustable Access Settings

Extended Relay Time (ERT) version is available for hold times of 15 or 30 seconds

## Low-Profile Design

Compact, aesthetically pleasing design; packages include both ceiling- and surface-mount adapters

## PRODUCT SERIES

|                     |  |
|---------------------|--|
| <b>10FLYKITB</b>    | (1) Passive infrared detector for request-to-exit applications (black)<br>(1) Surface adapter (black)<br>(1) Flush mounted ceiling adapter (black) |
| <b>10FLYKITBERT</b> | (1) Passive infrared detector with extended relay time (black)<br>(1) Surface adapter (black)<br>(1) Flush mounted ceiling adapter (black)         |
| <b>70.0011</b>      | 22 gauge 4-conductor cable<br><i>sold by the foot</i>  |



# FOCUS FAMILY

FOCUSED, ACTIVE INFRARED PRESENCE SENSORS






## Low-Profile Detection

Low profile, recessed mount enables FOCUS 2 and SMART FOCUS to protect pedestrians from contact with the moving door

## Monitoring Capable

SMART FOCUS is fully monitored (not FOCUS or FOCUS 2)



## Perfect For Activation Of Small Windows and Pass-Through

Ideal for drive-thru and pass-thru applications

## Ideal for Gates and Barriers

Horizontal mount for use in gate and barrier applications

## TECHNICAL SPECIFICATIONS

### 10FOCUS and 10FOCUS2

|                             |   |
|-----------------------------|---|
| Technology                  | Focused, active infrared                              |
| Detection Mode              | Presence  |
| Power Supply                | 24 VAC/VDC $\pm$ 10%                                  |
| Current Consumption         | 60 mA (on); 30 mA (off)                               |
| Output Interface; Relay     | Relay; max. contact rating is 1 A at 30 V (resistive) |
| Detection Range             | 0 – 8 1/2'  |
| Distance Adjustment         | 2 – 8', rotating cam with linear adjustment           |
| Detection Time              | < 50ms  |
| Detection Signal Duration   | Infinite presence detection                           |
| LED Activity                |   |
| Green                       | No detection  |
| Operating Temperature Range | -30 – 140 °F  |
| Connection to controller    | 5-conductor cable                                     |
| Relay Output                | NO or NC  |

## PRODUCT SERIES

|                  |   |
|------------------|---|
| 10FOCUS          | Distance-measuring, active infrared presence sensor (surface-mount)   |
| 10FOCUS2         | Distance-measuring, active infrared presence sensor (recessed-mount)  |
| 10SMARTFOCUS     | Distance-measuring, active infrared presence sensor (recessed-mount); adapts to environment by the push of a button |
| 10SMARTFOCUS SMA | Surface-mount adapter for SMART FOCUS sensor  |
| 15.0118          | FOCUS 2 harness (240")  |
| 70.0068          | FOCUS harness (48")   |
| 35.1128          | 6-conductor cable with socket for SMART FOCUS   |
| 70.0138          | Lens extrusion, ordered by inch (9" needed for 10FOCUS lens replacement)  |

### 10SMARTFOCUS

|                          |  |
|--------------------------|--|
| Technology               | Focused, active infrared   |
| Detection Mode           | Presence detection by distance measurement   |
| Detection Field          | 1 1/50" $\times$ 2 1/25" at 7 1/4' mounting height   |
| Light Indicator          |  |
| Red                      | ON during detection  |
| Orange                   | Flashes 1x after power on  |
| Response Time            | 64 ms  |
| Mounting Height          | 2 – 10'  |
| Supply Voltage           | 12 – 24 VAC/VDC -5% / 10%  |
| Mains Frequency          | 50 – 60 Hz   |
| Max. Current Consumption | 120 mA at 24 VAC / 80 mA at 24 VDC   |
| Standard Output          | Relay (free of potential contact)  |
| Max. Contact Voltage     | 42 VAC/VDC   |
| Max. Contact Current     | 1 A (resistive)  |
| Max. Switching Power     | 30 W (DC) / 60 VA (AC)   |
| Monitoring Input         | 1 optocoupler (free of potential contact)  |
| Max. Contact Voltage     | 30 V   |
| Voltage Threshold        | High state: > 10 V    Low State: < 1 V   |
| Hold Time                | 0.5 s  |
| Reflectivity             | min. 10% at IR-wavelength of 850 nm  |
| Temperature Range        | -13 – 131 °F (-25 – 55 °C)<br>0 – 95% rel. humidity, non-condensing  |
| Degree of Protection     | IP53   |
| Dimensions               | 5 3/4" (L) $\times$ 1 3/8" (H) $\times$ 2" (D)   |
| Length of Main Cable     | 8'   |
| Norm Conformity          | IEC 61000-6-2; IEC 61000-6-3<br>ISO 13849-1 Performance Level «c» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle) |



# IS40P

PRESENCE SENSOR WITH VIRTUAL LOOP FUNCTIONALITY




## Adjustable Learn Time

Nine unique infrared patterns capable of highly flexible presence detection in any industrial environment

## Reduce False Detections

Six modes of detection filtering are available for microwave immunity, as well as pedestrian and parallel traffic rejection

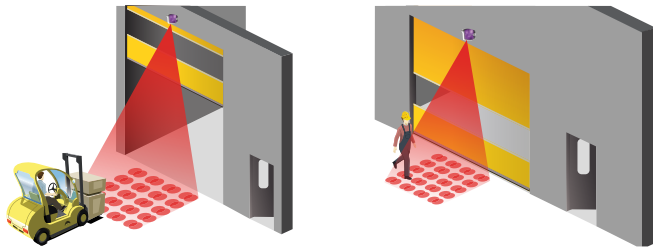


## Programmable Via Remote

Remote control programming enables user to quickly and safely make changes from the ground (sold separately)

## Easy to Program

Adjustable infrared immunity modes mitigate environmental disturbances such as subtle door vibrations, light, sun, rain, and snow

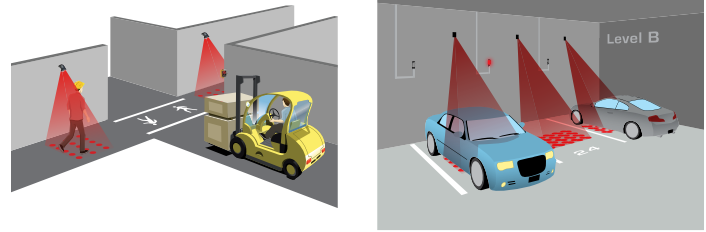

## TECHNICAL SPECIFICATIONS

|   |  |
|---|--|
| <b>Technology</b>                         | Active infrared  |
| <b>Detection Mode</b>                     | Presence   |
| <b>Mains Frequency</b>                    | 50 – 60 Hz   |
| <b>Power Consumption</b>                  | < 3.5 W  |
| <b>Output</b>                             | 2 relays (free of potential change-over contact)           |
| Max. Contact Voltage                      | 42 VAC/VDC   |
| Max. Contact Current                      | 1 A (resistive)  |
| Max. Switching Power                      | 30 W (DC) / 48 VA (AC)                                     |
| <b>Supply Voltage</b>                     | 12 – 24 VAC; ±10%<br>12 – 24 VDC; 10% / -3%                |
| <b>Temperature Range</b>                  | -22 – 140 °F   |
| <b>Tilt Angle</b>                         | 15 – 45°   |
| <b>Transmitter Frequency / Wavelength</b> | 875 nm   |
| <b>Transmitter Power Density</b>          | < 250 mW / m <sup>2</sup>                                  |
| <b>Detection Field</b>                    | 10' × 10' at max. mounting height of 16' (emitting spots)* |
| <b>Output Hold Time</b>                   | 0.5 s  |
| <b>Min. Detection Speed</b>               | 0 in/s to activate detection                               |
| <b>Reaction Time</b>                      | 250 ms   |
| <b>Mounting Height</b>                    | 8 – 16'  |
| <b>Humidity</b>                           | 0 – 95% non-condensing                                     |
| <b>Weight</b>                             | 14 oz  |
| <b>Dimensions</b>                         | 3 1/2" (W) × 4" (H) × 5" (D)                               |
| <b>Materials</b>                          | ABS, PC  |
| <b>Cable Length</b>                       | 32'  |
| <b>Degree of Protection</b>               | IP65   |
| <b>Norm Conformity</b>                    | EMC: 2004 / 108 / EC<br>R&TTE: 1999 / 5 / EC               |

\* Zone detected by SPOTFINDER (i.e. slightly larger than actual detection field)

## PRODUCT SERIES

|                      |  |
|----------------------|--|
| <b>10IS40P</b>       | Industrial sensor utilizing active infrared presence detection |
| <b>10INDBRACKET</b>  | Industrial mounting bracket                                    |
| <b>10MINIBRACKET</b> | Short, adjustable mounting bracket                             |
| <b>10WBA</b>         | Universal mounting bracket arm                                 |
| <b>10WBAMOUNT</b>    | Universal mounting bracket plate                               |
| <b>10REMOTE</b>      | Universal remote control for sensor setup                      |
| <b>10SPOTFINDER</b>  | Active infrared spotfinder                                     |
| <b>35.1566</b>       | 8-pin conductor cable (30')                                    |



# IXIO-ST

PRESENCE SENSOR FOR AUTOMATIC, SLIDING DOORS



## Precise Presence Detection



Two 24-spot, high-density infrared, safety curtains providing precise presence detection

## Easily Adjustable

Four visible, red, alignment spots are projected on the ground to assist in precise IR curtain adjustment

## Ease of Setup

Intelligent programming and troubleshooting via a menu-driven LCD

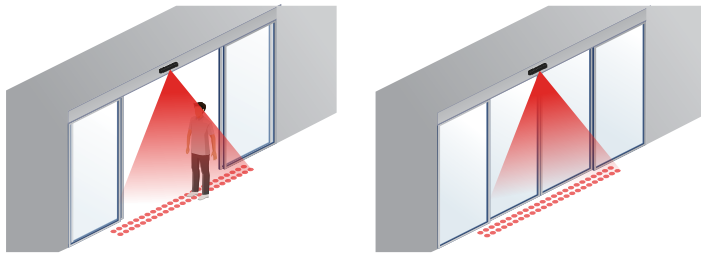

## TECHNICAL SPECIFICATIONS

|                                |  |
|--------------------------------|--|
| <b>Technology</b>              | Active infrared  |
| <b>Detection Mode</b>          | Presence   |
| <b>Spot Size</b>               | 2" x 2"  |
| <b>Max. Number of Spots</b>    | 24 per curtain   |
| <b>Max. Number of Curtains</b> | 2  |
| <b>Output</b>                  | Solid-state-relay (potential and polarity free)  |
| Max. Contact Voltage           | 42 VAC/VDC   |
| Max. Contact Current           | 400 mA   |
| Hold Time                      | 0.3 – 1 s  |
| <b>Test Input</b>              |  |
| Sensitivity                    | Low: < 1 V;<br>High: > 10 V (max. 30 V)<br>Response time on test request: typical < 5 ms   |
| <b>Supply Voltage</b>          | 12 – 24 VAC ±10%; 12 – 30 VDC ±10%<br>(to be operated from SELV compatible power supplies only)  |
| <b>Power Consumption</b>       | < 2.5 W  |
| <b>Mounting Height</b>         | 6 ½ – 11 ½'  |
| <b>Temperature Range*</b>      | -13 – 131 °F<br>0 – 95% relative humidity, non-condensing  |
| <b>Degree of Protection</b>    | IP54   |
| <b>Applicable Directives</b>   | R&TTE 1999 / 5 / EC; LVD 2006 / 95 / EC;<br>MD 2006 / 42 / EC; ROHS 2 2011 / 65 / EU   |
| <b>Dimension</b>               | 10 ¾" (W) x 2 ¼" (H) x 2 ¼" (D)  |
| <b>Cable Length</b>            | 10'  |
| <b>Norm Conformity</b>         | ISO 13849-1:2008 PL «c» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)<br>IEC 61496-1:2012 ESPE Type 2 |

\* LCD screen is operational from 14 to 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.

## Intelligent Solution

On-board microprocessor optimizes data analysis, monitors sensor performance, and enables system integration

## Standards Compliant

Fully monitored internally, capable of external monitoring

## PRODUCT SERIES

|                            |   |
|----------------------------|---|
| <b>10IXIOST</b>            | Active infrared presence sensor for sliding doors                   |
| <b>10ICA</b>               | IXIO ceiling accessory  |
| <b>10IMB</b>               | IXIO bracket accessory  |
| <b>10IRA</b>               | IXIO rain accessory   |
| <b>10CDA</b>               | IXIO curved door accessory  |
| <b>10IXIOSPACER</b>        | IXIO spacer (black)   |
| <b>35.1345</b>             | IXIO replacement cover (black)                                      |
| <b>35.1302</b>             | IXIO replacement cover (white)                                      |
| <b>35.1303</b>             | IXIO replacement cover (silver)                                     |
| <b>10RETROFITSPACERKIT</b> | Retrofit Spacer Kit - includes spacer, 2 ½" harness, and 9" harness |
| <b>20.5349</b>             | Wire harness (10')  |
| <b>20.5359</b>             | Wire harness (30')  |
| <b>10MINIBRACKET</b>       | Short, adjustable mounting bracket                                  |
| <b>10REMOTE</b>            | Universal remote control for sensor setup                           |



# IXIO-ST INDUSTRIAL

PRESENCE SENSOR FOR SMALL, INTERIOR, INDUSTRIAL DOORS



## Precise Presence Detection



Two 24-spot, high-density infrared, safety curtains providing precise presence detection

## Easily Adjustable

Four visible, red, alignment spots are projected on the ground to assist in precise IR curtain adjustment

## Ease of Setup

Intelligent programming and troubleshooting via a menu-driven LCD



## Intelligent Solution

On-board microprocessor optimizes data analysis, monitors sensor performance, and enables system integration

## Standards Compliant

Fully monitored internally, capable of external monitoring

## TECHNICAL SPECIFICATIONS

|                                |  |
|--------------------------------|--|
| <b>Technology</b>              | Active infrared  |
| <b>Detection Mode</b>          | Presence   |
| <b>Spot Size</b>               | 2" x 2"  |
| <b>Max. Number of Spots</b>    | 24 per curtain   |
| <b>Max. Number of Curtains</b> | 2  |
| <b>Output</b>                  | Solid-state-relay (potential and polarity free)  |
| Max. Contact Voltage           | 42 VAC/VDC   |
| Max. Contact Current           | 400 mA   |
| Hold Time                      | Infrared: 0.3 – 1 s  |
| <b>Test Input</b>              |  |
| Sensitivity                    | Low: < 1 V;<br>High: > 10 V (max. 30 V)  |
| Response time on test request: | < 5 ms (typical)   |
| <b>Supply Voltage</b>          | 12 – 24 VAC ±10%; 12 – 30 VDC ±10%<br>(to be operated from SELV compatible power supplies only)  |
| <b>Power Consumption</b>       | < 2.5 W  |
| <b>Mounting Height</b>         | 6 ½' – 11 ½'   |
| <b>Temperature Range*</b>      | -13 – 131 °F<br>0 – 95% relative humidity, non condensing  |
| <b>Degree of Protection</b>    | IP54   |
| <b>Applicable Directives</b>   | R&TTE 1999 / 5 / EC<br>LVD 2006 / 95 / EC<br>MD 2006 / 42 / EC<br>ROHS 2 2011 / 65 / EU  |
| <b>Dimension</b>               | 10 ¾" (W) x 2 ¼" (H) x 2 ¼" (D)  |
| <b>Cable Length</b>            | 30'  |
| <b>Norm Conformity</b>         | ISO 13849-1:2008 PL «C» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)<br>IEC 61496-1:2012 ESPE Type 2 |

\* LCD screen is operational from 14 to 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.

## PRODUCT SERIES

|                            |   |
|----------------------------|---|
| <b>10IXIOSTINDUS</b>       | Active infrared presence sensor for sliding doors                   |
| <b>10ICA</b>               | IXIO ceiling accessory  |
| <b>10IMB</b>               | IXIO bracket accessory  |
| <b>10IRA</b>               | IXIO rain accessory   |
| <b>10CDA</b>               | IXIO curved door accessory  |
| <b>10IXIOSPACER</b>        | IXIO spacer (black)   |
| <b>35.1345</b>             | IXIO replacement cover (black)                                      |
| <b>35.1302</b>             | IXIO replacement cover (white)                                      |
| <b>35.1303</b>             | IXIO replacement cover (silver)                                     |
| <b>10RETROFITSPACERKIT</b> | Retrofit Spacer Kit - includes spacer, 2 ½" harness, and 9" harness |
| <b>20.5349</b>             | Wire harness (10')  |
| <b>20.5359</b>             | Wire harness (30')  |
| <b>10MINIBRACKET</b>       | Short, adjustable mounting bracket                                  |
| <b>10REMOTE</b>            | Universal remote control for sensor setup                           |



## LZR®-FLATSCAN SW

SINGLE CURTAIN, STAND ALONE, DOOR MOUNTED, SAFETY SYSTEM FOR FULL- AND LOW-ENERGY SWING DOORS

### Background Independence

LASER technology ensures independence of all types of flooring (pedi-mats, carpet, reflective flooring, wet surfaces, etc.) and the surrounding environment of the door (guide rails, walls, weather, etc.)

### Leading-Edge Safety

Leading-edge safety extends the detection area beyond the leading edge of the door for enhanced safety

### Hand-Gesture Setup™

Easy door-width programming using Hand-Gesture Setup™ reduces configuration time



### Reduced Components

Hub-less system offers fewer components for easier setup and installation

### Reduced Uncovered Zone

LASER technology provides a reduced uncovered zone of down to 3/4 inch



## TECHNICAL SPECIFICATIONS

|                                 |  |
|---------------------------------|--|
| <b>Technology</b>               | LASER scanner, Time-of-Flight measurement  |
| <b>Detection Mode</b>           | Presence   |
| <b>Max. Detection Range</b>     | 13' (diagonal) with reflectivity of 2%<br>(e.g. at (W) × 5' > max. (H) × 12')<br>see <i>User's Guide</i> |
| <b>Detection Area</b>           |  |
| Door Leaf Safety                | 90°  |
| Pinch Zone Safety               | 16°  |
| <b>Angular Resolution</b>       |  |
| Door Leaf Safety                | 1.3°   |
| Pinch Zone Safety               | 0.2°   |
| <b>Typ. Min. Object Size</b>    |  |
| Door Leaf Safety                | 4" at 13' (in proportion to object distance, DIP 2 = ON)   |
| Pinch Zone Safety               | 3/4" at 13' (in proportion to object distance, DIP 2 = ON)   |
| <b>Emission Characteristics</b> | Wavelength 905 nm;<br>max. output pulse power 25 W; Class 1  |
| <b>Supply Voltage</b>           | 12 – 24 VDC ±15%   |
| <b>Power Consumption</b>        | ≤ 2 W  |
| <b>Response Time</b>            |  |
| Door Leaf Safety                | max. 50 ms   |
| Pinch Zone Safety               | max. 90 ms   |
| <b>Test Input</b>               | 30 VDC (max. switching voltage)<br>low < 1 V high > 10 V (voltage threshold)                             |
| <b>Output</b>                   | 2 electronic relays (galvanic isolation - polarity free)   |
| Max. Switching Voltage          | 42 VAC/VDC   |
| Max. Switching Current          | 100 mA   |
| <b>LED Activity</b>             |  |
| Red                             | Swing-side detection   |
| Green                           | Approach-side detection  |
| Yellow                          | Error  |
| <b>Dimensions</b>               | 5 1/2" (W) × 3 1/2" (H) × 1" (D)<br>(mounting bracket adds 1/4")   |
| <b>Materials</b>                | PC, ASA  |

|                             |   |
|-----------------------------|---|
| <b>Color</b>                | Black, white, or silver   |
| <b>Tilt Angles</b>          | 2 – 10° (without mounting bracket)  |
| <b>Degree of Protection</b> | IP54 (EN 60529)   |
| <b>Temperature Range</b>    | -22 – 140 °F (if powered)   |
| <b>Humidity</b>             | 0 – 95% non-condensing  |
| <b>Vibrations</b>           | < 2 G   |
| <b>Min. Door Leaf Speed</b> | 2° / s  |
| <b>Norm Conformity</b>      | ISO 13849-1 PL "d"/ CAT2<br>IEC 60825-1<br>IEC 60950-1<br>IEC 61000-6-2<br>IEC 61000-6-3<br>IEC 62061 SIL 2 |



# LZR®-FLATSCAN SW

SINGLE CURTAIN, STAND-ALONE, DOOR MOUNTED, SAFETY SYSTEM FOR FULL- AND LOW-ENERGY SWING DOORS



## PRODUCT SERIES

|                    |   |
|--------------------|---|
| 10LZRFLATSCAN-SWB  | Full-energy, swing door, safety system (black)              |
| 10LZRFLATSCAN-SWS  | Full-energy, swing door, safety system (silver)             |
| 10LZRFLATSCAN-SWW  | Full-energy, swing door, safety system (white)              |
| 10LZRFLATSCAN-LELB | Low-energy, swing door, safety system (left mount, black)   |
| 10LZRFLATSCAN-LELS | Low-energy, swing door, safety system (left mount, silver)  |
| 10LZRFLATSCAN-LELW | Low-energy, swing door, safety system (left mount, white)   |
| 10LZRFLATSCAN-LERB | Low-energy, swing door, safety system (right mount, black)  |
| 10LZRFLATSCAN-LERS | Low-energy, swing door, safety system (right mount, silver) |
| 10LZRFLATSCAN-LERW | Low-energy, swing door, safety system (right mount, white)  |
| 10LZRFLATSCAN-LB   | LZR-FLATSCAN SW sensor (left, black)                        |
| 10LZRFLATSCAN-LS   | LZR-FLATSCAN SW sensor (left, silver)                       |
| 10LZRFLATSCAN-LW   | LZR-FLATSCAN SW sensor (left, white)                        |
| 10LZRFLATSCAN-RB   | LZR-FLATSCAN SW sensor (right, black)                       |
| 10LZRFLATSCAN-RS   | LZR-FLATSCAN SW sensor (right, silver)                      |
| 10LZRFLATSCAN-RW   | LZR-FLATSCAN SW sensor (right, white)                       |
| 10LZRFLATSCANGDA   | LZR-FLATSCAN glass door accessory                           |
| 20.5433            | LZR-FLATSCAN control harness                                |
| 35.0213            | LZR-FLATSCAN SW replacement cover (left, black)             |
| 35.0214            | LZR-FLATSCAN SW replacement cover (right, black)            |
| 35.0220            | LZR-FLATSCAN SW replacement cover (left, white)             |
| 35.0221            | LZR-FLATSCAN SW replacement cover (right, white)            |
| 35.0242            | LZR-FLATSCAN SW replacement cover (left, silver)            |
| 35.0243            | LZR-FLATSCAN SW replacement cover (right, silver)           |
| 35.1329            | LZR-FLATSCAN primary/secondary harness                      |
| 70.5745            | Sentrex retrofit accessory                                  |
| 70.5751            | LZR-FLATSCAN spacer (silver)                                |
| 70.5752            | LZR-FLATSCAN spacer (white)                                 |
| 70.5753            | LZR-FLATSCAN spacer (black)                                 |





## LZR®-FLATSCAN 3D SW

FOUR CURTAIN, STAND ALONE, DOOR MOUNTED, SAFETY SENSOR

### Advanced Safety


The four detection curtains ensure a full-safety coverage of the leaf, hinge area and leading edge of the door, exceeding all industry standards

### Built-in Knowing Act Device

Two Virtual Push Buttons per sensor provide a non-contact form of door activation without wiring or installing in-wall switches

### Adaptive Sensing

High-resolution detection curtains create a reliable solution with the ability to self-adapt as the door opens, preventing false detections from guide rails and tight corridors

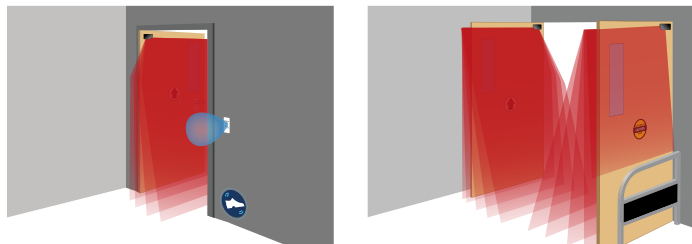

## TECHNICAL SPECIFICATIONS

|                                    |  |
|------------------------------------|--|
| <b>Technology</b>                  | LASER scanner, Time-of-Flight measurement  |
| <b>Detection Mode</b>              | Presence   |
| <b>Max. Detection Range</b>        | 13' (diagonal) with reflectivity of 2%<br>(e.g. at (W) × 5' > max. (H) × 12')  |
| <b>Recommended Mounting Height</b> | 75 – 98"   |
| <b>Opening Angle</b>               |  |
| Door Leaf Safety                   | 80°  |
| Pinch Zone Safety                  | 20°  |
| <b>Angular Resolution</b>          |  |
| Curtain 1                          | 0.2°   |
| Curtain 2                          | 1°   |
| Curtain 3                          | 1.7°   |
| Curtain 4                          | 2.5°   |
| <b>Tilt Angles</b>                 | 0 – 5°   |
| <b>Typ. Min. Object Size</b>       | ¾" at 13' in curtain C1  |
| <b>Emission Characteristics</b>    | Wavelength 905 nm;<br>output power < 0.1 mW; Class 1   |
| <b>Supply Voltage</b>              | 12 – 24 VDC ±15%<br>(to be operated from SELV-compatible power supplies only)  |
| <b>Power Consumption</b>           | < 2 W  |
| <b>Response Time</b>               | Typ. < 120 ms<br>Max. 220 ms   |
| <b>Output</b>                      | 3 electronic relays (galvanic isolation - polarity free)<br>Max. Switching Voltage 42 VAC/VDC<br>Max. Switching Current 100 mA |
| <b>LED Activity</b>                | 1 RGB LED: Detection / Output Status   |
| <b>Dimensions</b>                  | 5 ¾" (L) × 3 ½" (H) × 2 ½" (D)<br>Spacer D + 1 ½"  |
| <b>Materials</b>                   | PC, ASA  |




### Background Independence

LASER technology ensures independence of all types of flooring (pedi-mats, carpet, reflective flooring, wet surfaces, etc.) and the surrounding environment (weather and lighting)

### Easy Setup

Hub-less system offers fewer components for a more straightforward setup and installation. While Hand Gesture Setup™ reduces configuration time of the detection field width

*This sensor is powered by DC voltage only. If only VAC power is available, a 12V transformer paired with a rectifier must be used. Do not use a 24V transformer and rectifier as this will cause damage to the product.*

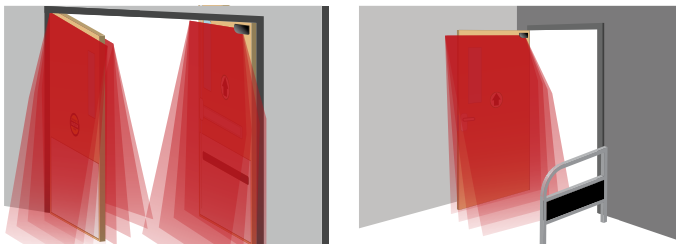

|                             |  |
|-----------------------------|--|
| <b>Color</b>                | Black  |
| <b>Degree of Protection</b> | IP44 (EN 60529)  |
| <b>Temperature Range</b>    | -13 – 140 °F   |
| <b>Humidity</b>             | 0 – 95% non-condensing                                     |
| <b>Vibrations</b>           | < 2 G  |
| <b>Min. Door Leaf Speed</b> | 2°/s   |
| <b>Norm Conformity</b>      | ISO 13849-1 Pl "d"/ CAT2<br>IEC 60825-1<br>IEC 62061 SIL 2 |

## PRODUCT SERIES

|                              |  |
|------------------------------|--|
| <b>10LZRFLATSCAN3D-SWBK</b>  | LZR-FLATSCAN 3D SW sensor kit (left and right, black)                |
| <b>10LZRFLATSCAN3D-SWBKU</b> | LZR-FLATSCAN 3D SW sensor kit (left and right, black) + power supply |
| <b>10LZRFLATSCAN3D-LBK</b>   | LZR-FLATSCAN 3D SW sensor kit (left, black)                          |
| <b>10LZRFLATSCAN3D-RBK</b>   | LZR-FLATSCAN 3D SW sensor kit (right, black)                         |
| <b>10LZRFLATSCAN3D-LB</b>    | LZR-FLATSCAN 3D SW sensor (left, black)                              |
| <b>10LZRFLATSCAN3D-RB</b>    | LZR-FLATSCAN 3D SW sensor (right, black)                             |
| <b>10LZRFLATSCAN3D-GDA</b>   | LZR-FLATSCAN glass door accessory                                    |
| <b>35.0287</b>               | LZR-FLATSCAN 3D SW replacement cover (left, black)                   |
| <b>35.0288</b>               | LZR-FLATSCAN 3D SW replacement cover (right, black)                  |
| <b>70.5753</b>               | LZR-FLATSCAN spacer (black)  |
| <b>20.5433</b>               | LZR-FLATSCAN 3D SW control harness                                   |
| <b>35.1329</b>               | LZR-FLATSCAN primary/secondary harness                               |
| <b>70.5745</b>               | Sentrex retrofit accessory   |



# LZR®-H100

LASER SCANNER FOR GATE AND BARRIER APPLICATIONS



## Dual Relay Activation

Two relays allow for activation via motion or presence

## Effective Alternative to Loop Detectors

Ideal for applications where cutting ground for loops is prohibited, impossible, or expensive

## Reliable and Constant Detection

Time-of-Flight, presence based, opto-electronic sensor ensures accurate and immediate detection

## Trajectory Detection

Ability to detect vehicle trajectory during approach and departure

## Pedestrian Traffic Rejection


Ability to detect or ignore pedestrian traffic

## Large Detection Field

Maximum detection field of 32 ft by 32 ft (9 ¾ m by 9 ¾ m)

## Ease of Installation

Teach-in setup via walk path or remote control configuration



## TECHNICAL SPECIFICATIONS

|                                      |  |
|--------------------------------------|--|
| <b>Technology</b>                    | LASER scanner, Time-of-Flight measurement                            |
| <b>Detection Mode</b>                | Motion and presence  |
| <b>Max. Detection Range</b>          | 32' × 32' (9 ¾ m)  |
| <b>Min. Detection Field (safety)</b> | 1'8" (½ m)   |
| <b>Remission Factor</b>              | > 2%   |
| <b>Angular Resolution</b>            | 0.3516°  |
| <b>Emission Characteristics</b>      |  |
| IR LASER                             | Wavelength 905 nm;<br>output power 0.10mW (CLASS 1)                  |
| Red Visible LASER                    | Wavelength 635 nm;<br>output power 0.95mW (CLASS 2)                  |
| <b>Supply Voltage</b>                | 10 – 35 VDC at sensor terminal                                       |
| <b>Peak Current at Power-On</b>      | 1.8 A (max. 80 ms at 35 V)   |
| <b>Power Consumption</b>             | < 5 W  |
| <b>Response Time</b>                 |  |
| Motion Detection                     | typ. 200 ms (adjustable)   |
| Presence Detection                   | typ. 20 ms (max. 80 ms)  |
| <b>Output</b>                        | 2 electronic relays (galvanic isolated – polarity free)              |
| Max. Switching Voltage               | 35 VDC / 24 VAC  |
| Max. Switching Current               | 80 mA (resistive)  |
| Switching Time                       | t <sup>ON</sup> = 5 ms; t <sup>OFF</sup> = 5 ms                      |
| Output Resistance                    | typ 30 Ω   |
| Voltage Drop on Output               | < 0.7 V at 20 mA   |
| <b>LED Activity</b>                  |  |
| Blue                                 | Power-on   |
| Orange                               | Error status   |
| Red/Green (x2)                       | Detection / Output Status<br>(green = no detection, red = detection) |
| <b>Dimensions</b>                    | 3 ⅝" (W) × 2 ¾" (H) × 5" (D)<br>mounting bracket: + ½"               |
| <b>Cable Length</b>                  | 33'  |
| <b>Materials</b>                     | PC, ASA  |
| <b>Color</b>                         | Black  |
| <b>Rotation Angle on Bracket</b>     | ±5° (lockable)   |

|                                   |   |  |
|-----------------------------------|---|--|
| <b>Tilt Angle on Bracket</b>      | ±3°   |  |
| <b>Degree of Protection</b>       | NEMA 4 / IP65   |  |
| <b>Temperature Range</b>          | -22 – 140 °F (-30 – 60 °C) powered<br>14 – 140 °F (-10 – 60 °C) unpowered             |  |
| <b>Humidity</b>                   | 0 – 95% non-condensing  |  |
| <b>Vibrations</b>                 | < 2 G   |  |
| <b>Pollution on Front Screens</b> | max. 30%; homogenous  |  |
| <b>Norm Conformity</b>            | 2006 / 95 / EC: LVD<br>2004 / 108 / EC: EMC<br>IEC 60825-1:2007<br>IEC 61000-6-2:2005 | 2002 / 95 / EC: RoHS<br>IEC 60529:2001<br>IEC 60950-1:2005<br>IEC 61000-6-3:2006 |

## PRODUCT SERIES

|                    |  |
|--------------------|--|
| <b>10LZRH100</b>   | LASER scanner with highly precise detection zone |
| <b>10LBA</b>       | LZR mounting bracket accessory                   |
| <b>10PSMDR2024</b> | DIN rail power supply,<br>100 – 240 VAC / 24 VDC |
| <b>10REMOTE</b>    | Universal remote control for sensor setup        |



## LZR®-I30



LASER SCANNER FOR INDUSTRIAL AUTOMATION

### 3-Dimensional Safety Zone

Four curtains of detection each capable of 360 in by 360 in (30 ft by 30 ft)

### Highly Accurate Detections

Detects objects as small as 2 inches at 30 feet away, depending on application



### Energy Savings

Has the ability to ignore dynamic ground conditions and extreme weather

### Easily Adjustable

Three visible LEDs for pattern alignment

## TECHNICAL SPECIFICATIONS

|                                  |  |
|----------------------------------|--|
| <b>Technology</b>                | LASER scanner, Time-of-Flight measurement  |
| <b>Detection Mode</b>            | Motion and presence (EN 12453 Typ. E)  |
| <b>Max. Detection Range</b>      | 30' × 30'  |
| <b>Remission Factor</b>          | > 2%   |
| <b>Emission Characteristics</b>  |  |
| IR LASER                         | Wavelength 905 nm;<br>output power 0.10mW (CLASS 1)                                      |
| Red Visible LASER                | Wavelength 635 nm;<br>output power 0.95mW (CLASS 2)                                      |
| <b>Supply Voltage</b>            | 10 – 35 VDC at sensor terminal (to be operated from SELV compatible power supplies only) |
| <b>Peak Current at Power-On</b>  | 1.8 A (max. 80 ms at 35 V)   |
| <b>Power Consumption</b>         | < 5 W  |
| <b>Response Time</b>             | Typ. 20 ms; max. 80 ms (+ output activation delay)                                       |
| <b>Output</b>                    | 2 electronic relays (galvanic isolated – polarity free)                                  |
| Max. Switching Voltage           | 35 VDC / 24 VAC  |
| Max. Switching Current           | 80 mA (resistive)  |
| <b>LED Activity</b>              |  |
| Blue                             | Power-on   |
| Orange                           | Error status   |
| Red/Green (x2)                   | Detection / Output Status<br>(green = no detection, red = detection)                     |
| <b>Dimensions</b>                |  |
| Housing                          | 5" (W) × 2 3/4" (H) × 3 2/3" (D)   |
| 10LBA                            | Adds 1 1/2"  |
| <b>Cable Length</b>              | 30'  |
| <b>Materials</b>                 | PC, ASA  |
| <b>Color</b>                     | Black  |
| <b>Rotation Angle on Bracket</b> | ±5° (lockable)   |
| <b>Tilt Angle on Bracket</b>     | ±3°  |
| <b>Degree of Protection</b>      | NEMA 4 / IP65  |
| <b>Temperature Range</b>         | -22 – 140 °F if powered<br>14 – 140 °F if unpowered                                      |
| <b>Humidity</b>                  | 0 – 95% non-condensing   |
| <b>Vibrations</b>                | < 2 G  |

|                                   |  |   |
|-----------------------------------|--|---|
| <b>Pollution on Front Screens</b> | Max. 30%; homogenous   |   |
| <b>Test Body Dimensions</b>       | 700 mm × 300 mm × 200 mm<br>(28" × 12" × 8")   |   |
| <b>Norm Conformity</b>            | 2006 / 95 / EC: LVD<br>2002 / 95 / EC: RoHS<br>2004 / 108 / EC: EMC<br>2006 / 42 / EC: MD<br>EN 12453:2000<br>chapter 5.1.1.6,<br>chapter 5.5.1 Safety<br>device E<br>EN 12978:2009<br>EN ISO 13849-1:2008<br>CAT2, Pl "d"; EN<br>60529:2001 | IEC 60825-1:2007<br>EN 60950-1:2005<br>EN 61000-6-2:2005<br>EN 61000-6-3:2006<br>IEC 61496-1:2009<br>EN 61496-3: 2008 ESPE<br>Type 2<br>EN 62061:2005 SIL 2 |

## PRODUCT SERIES

|                      |  |
|----------------------|--|
| <b>10LZR130</b>      | LASER scanner with highly precise detection zone |
| <b>10LBA</b>         | LZR mounting bracket accessory                   |
| <b>10INDBRACKET</b>  | Industrial mounting bracket                      |
| <b>10MINIBRACKET</b> | Short, adjustable mounting bracket               |
| <b>10REMOTE</b>      | Universal remote control for sensor setup        |
| <b>10PSMDR2024</b>   | DIN rail power supply,<br>100 – 240 VAC / 24 VDC |
| <b>10PS12-24</b>     | UL / ULC Listed power supply                     |
| <b>10PSVR5T</b>      | Voltage regulator, 24 VAC / 24 VDC               |
| <b>35.1242</b>       | 8-conductor cable (30')                          |



# LZR®-MICROSCAN T

STAND-ALONE, DOOR-MOUNTED, SWING-DOOR, SAFETY SYSTEM



## Easy to Install

Plug-and-play technology utilizing a centralized hub and intuitive LCD interface greatly reduces installation and setup time

## Highly Accurate Detection

High resolution, self-adapting detection zones, coupled with reduced uncovered zones create the most accurate and reliable safety sensor

## Built-in Troubleshooting





On-board error log ensures easy technical support

## Standards Compliant

Fully monitored internally, capable of external monitoring

## UL10B/C Listed

Fire-rated for up to three hours



## TECHNICAL SPECIFICATIONS

|   |  |
|---|--|
| <b>Technology</b>                           | LASER scanner, Time-of-Flight measurement  |
| <b>Detection Mode</b>                       | Presence   |
| <b>Min. / Max. Door Width</b>               | 20 – 48"<br>(measured from leading edge to sensor LED)   |
| <b>Mounting Height</b>                      | 75 – 98"<br>(measured from finished floor to sensor LED)   |
| <b>Remission Factor</b>                     | > 2%   |
| <b>Angular Resolution</b>                   | 2.56°  |
| <b>Testbody</b>                             | 28" (H) × 12" (W) × 8" (D)   |
| <b>Emission Characteristics</b><br>IR LASER | Wavelength 905 nm; maximum output pulse power 35 W (Class I)   |
| <b>Supply Voltage</b>                       | 12 – 30 VDC (15 W Class II)  |
| <b>Power Consumption</b>                    | < 15 W   |
| <b>Response Time</b>                        | Typ. 40 ms; max. 80 ms   |
| <b>Output Rating</b>                        | 4 electro-mechanic relays<br>(galvanic isolated - polarity free)<br>All outputs Class 2 supply, 12 – 24 VAC,<br>12 – 30 VDC, max. 15 W |
| <b>Test Rating</b>                          | 2 optocouplers (galvanic isolated - polarity free)<br>12 – 30 VDC, max. 15 W   |
| <b>Temperature Range</b>                    | -13 – 121 °F (-25 – 55 °C)   |
| <b>Degree of Protection</b>                 | Hub: IP20 / NEMA 1<br>Sensor: IP53 / NEMA 3  |
| <b>Humidity</b>                             | 0 – 95%, non-condensing  |
| <b>Vibrations</b>                           | < 2 G  |
| <b>Materials</b>                            | PC, ASA  |
| <b>Norm Conformity</b>                      | EN 60825-1-Eye-safety class 1 IR LASER (905 nm)<br>UL10B/C Fire Rated 3 hrs (file #R39071)   |
| <b>Mounting Angle (rotational)</b>          | 35° fixed  |
| <b>Tilt Angle</b>                           | 0 – 5° (for angles less than 5°, contact<br>Technical Support)   |
| <b>Pollution on Front Screens</b>           | Maximum 30%, homogenous  |

## PRODUCT SERIES

|                          |  |
|--------------------------|--|
| <b>10LZRMICROSCAN1T</b>  | Single door kit<br>(1) left sensor, (1) right sensor, (1) hub,<br>(1) primary harness, (1) secondary harness,<br>(1) door control harness, (1) home switch,<br>(1) door loop / cap kit, (1) sensor spacer                        |
| <b>10LZRMICROSCAN1UT</b> | (1) 10LZRMICROSCAN1T<br>(1) 10LZRMICROSCAN-UKIT  |
| <b>10LZRMICROSCAN2T</b>  | Pair/Dual-egress door kit<br>(2) left sensors, (2) right sensors, (1) hub,<br>(2) primary harnesses, (2) secondary harnesses,<br>(2) door control harnesses, (2) home switches, (2)<br>door loops / cap kits, (2) sensor spacers |
| <b>10LZRMICROSCAN2UT</b> | (1) 10LZRMICROSCAN2T<br>(1) 10LZRMICROSCAN-UKIT  |
| <b>10MICROSCAN-UKIT</b>  | Universal accessory kit converts Single door kit<br>and Pair/Dual-egress door kit into<br>10MICROSCAN1UT and 10MICROSCAN2UT<br>(1) power supply<br>(1) ON / OFF / HOLD OPEN switch   |

## OPTIONAL MOUNTING KITS

|                         |   |
|-------------------------|---|
| <b>10MICROSCANMOUNT</b> | Center-pivot door mounting kit includes:<br>(1) Left mounting arm<br>(1) Right mounting arm   |
| <b>10MICROSCAN-Y</b>    | Glass/Fire door mounting kit includes:<br>(1) 20.5319 - 20" secondary harness<br>(1) 20.5320 - "Y" cable LZR-MICROSCAN-T<br>hub to LZR-MICROSCAN-T harness<br>(1) 70.0202 - 26" standard door cord loop<br>(1) 55.0001 - Door loop end cap for door frame |



# LZR®-MICROSCAN T

STAND-ALONE, DOOR-MOUNTED, SWING DOOR, SAFETY SYSTEM



## REPLACEMENT COMPONENTS

|                    |  |
|--------------------|--|
| 10LZRMICROLEFTT    | Left LZR-MICROSCAN T sensor                              |
| 10LZRMICRORIGHTT   | Right LZR-MICROSCAN T sensor                             |
| 10LZRMICROSCANHUBT | LZR-MICROSCAN T hub                                      |
| 10DOORSWITCH       | Universal Kit ON / OFF / HOLD OPEN switch                |
| 20.5095            | Power supply harness                                     |
| 20.5096            | EAGLE harness for LZR-MICROSCAN T                        |
| 20.5222            | Door control harness                                     |
| 20.5304            | System harness   |
| 20.5310            | ON / OFF / HOLD OPEN switch jumper                       |
| 20.5319            | Secondary harness for 10MICROSCANMOUNT (20")             |
| 20.5320            | "Y" cable LZR-MICROSCAN-T hub to LZR-MICROSCAN-T harness |
| 20.5322            | LZR-MICROSCAN T plug-n-play harness for Horton 4190      |
| 20.5347            | Hub to LZR-MICROSCAN T harness (30')                     |
| 30.5558            | Universal kit power supply                               |
| 30.5580            | 2-wire switch  |
| 35.1326            | Primary sensor harness                                   |
| 35.1327            | Secondary sensor harness                                 |
| 41.7922            | Left pass-through LZR-MICROSCAN T sensor end cap         |
| 41.7923            | Right pass-through LZR-MICROSCAN T sensor end cap        |
| 41.8632            | End cap screws   |
| 50.0046            | Velcro tabs  |
| 50.0048            | Spacer mount screws                                      |
| 50.0078            | Jamb cap kit   |
| 50.1818            | Spacer mount screws (metal)                              |
| 50.5282            | Spacer mount screws (wood)                               |
| 50.5283            | Home Switch (surface mount)                              |
| 70.0202            | 26" standard door cord loop                              |
| 70.5554            | LZR-MICROSCAN T sensor spacer                            |
| 70.5745            | Sentrex retrofit accessory                               |
| 35.1321            | LZR-MICROSCAN T replacement cover                        |



# LZR®-S600

LASER SCANNER FOR BUILDING AUTOMATION AND SECURITY



## BEA's Largest Detection Field

Maximum detection range of 82 ft by 82 ft

## Safe and Reliable



External, entrapment protection device capable of monitoring with interfaces building management systems

## Reduce False Detections

High immunity to environmental interferences

## Eliminates False Detections

Has the ability to ignore dynamic ground conditions and extreme weather



## TECHNICAL SPECIFICATIONS

|   |  |
|---|--|
| <b>Technology</b>                       | LASER scanner, Time-of-Flight measurement                            |
| <b>Detection Mode</b>                   | motion and presence  |
| <b>Detection Range</b>                  | Default: 33' x 33' at 2% remission factor (max. 82' x 82')           |
| <b>Angular Resolution</b>               | 0.3516°  |
| <b>Min. Detected Object Size (typ.)</b> | 0.8 in at 10'<br>1.4 in at 16'<br>2.8 in at 33'<br>6.9 in at 82'     |
| <b>Emission Characteristics</b>         |  |
| IR LASER                                | wavelength 905 nm; output power 0.10mW (CLASS 1)                     |
| Red visible LASER                       | wavelength 635 nm; output power 0.95mW (CLASS 2)                     |
| <b>Supply Voltage</b>                   | 10 – 35 VDC at sensor side   |
| <b>Power Consumption</b>                | < 5 W  |
| <b>Peak Current at Power-on</b>         | 1.8 A (max. 80 ms at 35 V)   |
| <b>Cable Length</b>                     | 33'  |
| <b>Response Time</b>                    | typ. 20 ms (max. 80 ms)<br>+ output activation delay                 |
| <b>Output</b>                           | 2 electronic relays (galvanic-isolated – polarity-free)              |
| Max. switching voltage                  | 35 VDC / 24 VAC  |
| Max. switching current                  | 80 mA (resistive)  |
| Switching time                          | t <sub>ON</sub> = 5 ms; t <sub>OFF</sub> = 5 ms                      |
| Output resistance                       | typ 30 Ω   |
| Voltage drop on output                  | < 0.7 V at 20 mA   |
| Leakage current                         | < 10 μA  |
| <b>Input</b>                            | 2 optocouplers (galvanic-isolated – polarity-free)                   |
| Max. contact voltage                    | 30 VDC (over-voltage protected)                                      |
| Voltage threshold                       | Log. Active High: > 8 VDC Log. Active Low: < 3 VDC                   |
| <b>Response Time</b>                    |  |
| <b>Monitoring Input</b>                 | < 5 ms   |
| <b>LED Activity</b>                     |  |
| Blue                                    | Power-on   |
| Orange                                  | Error status   |
| Red/Green (x2)                          | Detection / Output Status<br>(green = no detection, red = detection) |
| <b>Dimensions</b>                       | 3 3/8" x 2 3/4" x 5" (W x H x D)<br>mounting bracket: + 1/2"         |

|                                   |   |
|-----------------------------------|---|
| <b>Material</b>                   | PC/ASA  |
| <b>Color</b>                      | Black   |
| <b>Mounting Angles on Bracket</b> | -45°, 0°, 45°   |
| <b>Rotation Angles on Bracket</b> | -5 – 5° (lockable)  |
| <b>Tilt Angles on Bracket</b>     | -3 – 3°   |
| <b>Protection Degree</b>          | NEMA 4 / IP65   |
| <b>Temperature Range</b>          | powered: -22 – 140 °F (-30 – 60 °C)<br>unpowered: 14 – 140 °F (-10 – 60 °C)   |
| <b>Humidity</b>                   | 0 – 95% non-condensing  |
| <b>Vibrations</b>                 | < 2G  |
| <b>Pollution on Front Screen</b>  | max. 30%, homogenous  |
| <b>Norm Conformity</b>            | 2006/95/EC: LVD; 2002/95/EC: RoHS; 2004/108/EC: EMC; IEC 60529:2001; IEC 60825-1:2007; IEC 60950-1:2005; IEC 61000-6-2:2005; IEC 61000-6-3:2006 |

## PRODUCT SERIES

|                      |   |
|----------------------|---|
| <b>10LZRS600</b>     | Presence detection for building automation and security |
| <b>10LBA</b>         | LZR mounting bracket accessory                          |
| <b>10INDBRACKET</b>  | Industrial mounting bracket                             |
| <b>10MINIBRACKET</b> | Short, adjustable mounting bracket                      |
| <b>10REMOTE</b>      | Universal remote control for sensor setup               |
| <b>10PSMDR2024</b>   | DIN rail power supply, 100 – 240 VAC / 24 VDC           |
| <b>10PS12-24</b>     | UL / ULC Listed power supply                            |
| <b>10PSVR5T</b>      | Voltage regulator, 24 VAC / 24 VDC                      |
| <b>35.1242</b>       | 8-conductor cable (30')                                 |



# MICROCELL ONE

PHOTO BEAMS FOR PEDESTRIAN, AUTOMATIC DOORS

## Enhanced Safety on Pedestrian Doors



Easy installation on all types of pedestrian doors

## User-Friendly Setup

LED indicators assist in setting up alignment

## Standard Compliant

Can be mounted as low as 12 inches from the floor



## Ideal for Wide Doors

Maximum range of detection of 15 feet with an 8° alignment tolerance

## Compatible with BEA's BODYGUARD-T

Capable of meeting ANSI 156.10 standard for swing-door safety when paired with BEA's BODYGUARD-T

## TECHNICAL SPECIFICATIONS

|                                    |  |
|------------------------------------|--|
| <b>Technology</b>                  | Active infrared  |
| <b>Detection Mode</b>              | Presence (beam interruption)   |
| <b>Min. Mounting Height</b>        | 12" from floor   |
| <b>Min. Distance Between Beams</b> | 12" (crossed beams)  |
| <b>Min. Range of Detection</b>     | 3'   |
| <b>Max. Range of Detection</b>     | 15'  |
| <b>Alignment Tolerance</b>         | 8°   |
| <b>Response Time</b>               | ≤ 40 ms  |
| <b>Hold Time</b>                   | 300 ms   |
| <b>Supply Voltage</b>              | 12 – 24 VAC; ±10%<br>12 – 24 VDC; -5% / 30%  |
| <b>Current Consumption</b>         | < 100 mA   |
| <b>Output Contact Rating</b>       | 1 relay (NC / NO contacts)   |
| Max. Contact Voltage               | 50 VAC/VDC   |
| Max. Contact Current               | 1 A  |
| Max. Switching Power               | 30 W (DC) / 60 VA (AC)   |
| <b>Operating Temperature</b>       | -30 – 131 °F   |
| <b>Immunity</b>                    |  |
| Sunlight                           | 75,000 lux   |
| Incandescent Lamp                  | 25,000 lux at 8° angle   |
| Electromagnetic Compatibility      | According to 89 / 336 EEC  |
| <b>Dimensions</b>                  |  |
| Head Body                          | < 1 <sup>5</sup> / <sub>32</sub> " (L embed) × 1 <sup>5</sup> / <sub>32</sub> " (ø)                                      |
| Head Harness                       | 3 <sup>5</sup> / <sub>16</sub> " (ø)   |
| Control Board                      | 3 1 <sup>2</sup> / <sub>33</sub> " (W) × 1 2 <sup>2</sup> / <sub>25</sub> " (H) × 2 1 <sup>1</sup> / <sub>33</sub> " (D) |
| <b>Cable Length</b>                | 18' (standard)<br>32' (optional)   |
| <b>Material</b>                    | ABS  |
| <b>Degree Of Protection</b>        | NEMA 4 / IP65 (beam heads)   |

## PRODUCT SERIES

|                           |  |
|---------------------------|--|
| <b>10MICROCELL1S</b>      | Single safety beam with control box (18' cable)  |
| <b>10MICROCELL1SL</b>     | Single safety beam with control box (32' cable)  |
| <b>10MICROCELL1D</b>      | Double safety beam with control box (18' cable)  |
| <b>10MICROCELL1DL</b>     | Double safety beam with control box (32' cable)  |
| <b>10MICROCELLADAPTER</b> | Wiring kit to retrofit BEA MICROCELL beams where Optex beams are currently installed<br><b>Must order with part number 03.0109 and the 10MICROCONTROL</b>  |
| <b>10MICROCONTROL</b>     | MICROCELL control box  |
| <b>10MICRO1SADAPT</b>     | MICROCELL single beam adapter kit allows for MICROCELL beams to replace Optex beams without running a new cable<br>(1) set of MICROCELL emitter and receiver heads,<br>(1) 10MICROCELLADAPTER,<br>(1) 10MICROCONTROL   |
| <b>10MICRO1DADAPT</b>     | MICROCELL double beam adapter kit allows for MICROCELL beams to replace Optex beams without running a new cable<br>(2) sets of MICROCELL emitters and receiver heads,<br>(2) 10MICROCELLADAPTER,<br>(1) 10MICROCONTROL |
| <b>03.0109</b>            | 3" Emitter and 3" Receiver (ordered as a set)  |
| <b>20.0045</b>            | Jamb cap kit with screws   |
| <b>20.0055</b>            | Emitter and Receiver set (32' cable)   |
| <b>20.0056</b>            | Emitter and Receiver set (18' cable)   |



# R2E-100

FOCUSED ACTIVE INFRARED, REQUEST-TO-EXIT SENSOR



## Standards Compliant

UL294 and ULCS319 Listed

## Define Your Tilt Angle

Adjustable tilt angle from zero to 10°

## Customizable Detection Zones


Adjustable detection range from 20 to 48 inches

## Low-Profile Mounting

Low-profile sensor mounts on or above the door frame

## Multiple Inputs

Three DRY auxiliary inputs: a push button or other request-to-exit device, a card reader or other request-to-enter device, and a door position switch

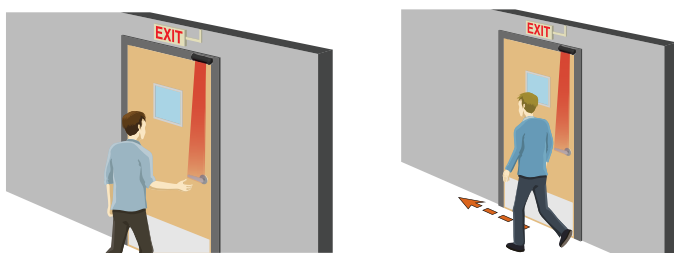

## TECHNICAL SPECIFICATIONS

|                                   |  |
|-----------------------------------|--|
| <b>Detector Type</b>              | Focused, active infrared                             |
| <b>Supply Voltage</b>             | 12 – 24 VAC/VDC; ±10% at 60 Hz                       |
| <b>Current</b>                    |  |
| Sounder OFF                       | 155 mA   |
| Sounder MAX VOLUME                | 200 mA   |
| <b>Temperature (UL Install)</b>   | 32 – 120 °F (0 – 49 °C)                              |
| <b>Temperature</b>                | -20 – 120 °F (-29 – 49 °C)                           |
| <b>Humidity</b>                   |  |
| (ULCS319 Installation)            | 0 – 93% non-condensing                               |
| (UL294 Installation)              | 0 – 85% non-condensing                               |
| <b>Detection Range*</b>           | 20 – 48", adjustable via potentiometer               |
| <b>Relay</b>                      | 2 Form "C" contact sets;<br>1.3 A at 24 VAC / 30 VDC |
| <b>Relay Hold Time</b>            | 0.5 – 60 s, adjustable via potentiometer             |
| <b>Sounder</b>                    | 85 dB max, adjustable volume                         |
| <b>LEDs</b>                       | Green, red, yellow, orange                           |
| <b>REX Input</b>                  | DRY contact, NO                                      |
| <b>Card Reader Input</b>          | DRY contact, NC                                      |
| <b>Door Position Switch Input</b> | DRY contact, NO                                      |
| <b>Dimensions</b>                 | 6 7/10" (W) × 1 7/10" (D) × 2" (H)                   |
| <b>Materials</b>                  | ABS, PC  |
| <b>Wiring Interface</b>           | JST (14-pin) with 4' cable                           |
| <b>Norm Conformity</b>            | UL294, ULCS319<br>FCC Part 15 B                      |

\* R2E-100 can accommodate swing doors up to 7 feet high.

## PRODUCT SERIES

|                  |  |
|------------------|--|
| <b>10R2E-100</b> | UL / ULC Listed, active infrared, request-to-exit detector specifically designed for access control applications |
|------------------|--|





# SUPERSCAN-T

DOOR MOUNTED, ACTIVE INFRARED, SAFETY SENSOR

## Fit to the Application



Housing available up to 102 inches in length; can be field cut to desired door width

## ANSI Compliant

Capable of meeting ANSI 156.10 standard for swing-door safety when coupled with BEA's BODYGUARD-T

## Functional Design

Designed to mount at the top of the door to reduce accidental damage



## TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| <b>Technology</b>                      | Active infrared with background suppression                         |
| <b>Detection Mode</b>                  | Presence  |
| <b>Measurement of Distance</b>         | Triangulation   |
| <b>Power Supply</b>                    | 12 – 24 VAC/VDC ±10%  |
| <b>Output Interface; Relay</b>         | Relay – max. contact rating: 1A at 30 V (resistive)                 |
| <b>Detection Range</b>                 | 0 – 8'  |
| <b>Distance Adjustment</b>             | 2 – 8' (rotating cam with linear adjustment)                        |
| <b>Max. Mounting Height</b>            | 8'  |
| <b>Detection Signal Duration</b>       | Infinite presence detection   |
| <b>Detection Time</b>                  | < 50 ms   |
| <b>Output Hold Time</b>                | Potentiometer range: 0.1 – 4.5 s                                    |
| <b>Operating Temperature Range</b>     | -30 – 140 °F  |
| <b>PCB Dimensions</b>                  |   |
| Primary                                | 10.91" (W) × 1.5" (H)   |
| Secondary                              | 8.75" (W) × 1.5" (H)  |
| <b>Connector to Door Controller</b>    | 8-position screw terminal on Primary PCB                            |
| <b>Primary-to-Secondary Connection</b> | Flat-ribbon cable with connectors and key lock                      |
| <b>Max. Number of Secondaries</b>      | 8   |
| <b>Functions Selection</b>             | Detection mode: NO or NC<br>Normal mode or Background Analysis mode |



## Customizable

Can be set to background analysis mode to reduce the chance of false detection from faulty environmental situations

## Standards Compliant

Capable of external monitoring

## PRODUCT SERIES

See page 34...



# SUPERSCAN-T INDUSTRIAL

ACTIVE INFRARED, SAFETY SENSOR



## Fit to the Application

Housing available up to 96 inches; can be field-cut to desired door width

## User-Defined Detection Zones

Detection zone of 24 to 96 inches

## Adjustable Detection Zone




Can be set to background analysis mode to reduce the change of false detection from faulty environmental situations

## Customizable Hold Time

Relay hold time can be adjusted from 0.1 to 4.5 seconds

## Standards Compliant

Capable of external monitoring

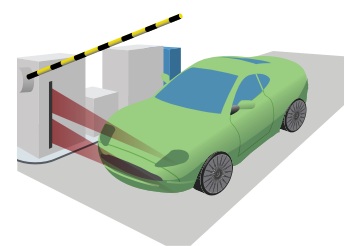

## TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| <b>Technology</b>                      | Active infrared with background suppression                         |
| <b>Detection Mode</b>                  | Presence  |
| <b>Measurement of Distance</b>         | Triangulation   |
| <b>Power Supply</b>                    | 12 – 24 VAC/VDC ±10%  |
| <b>Output Interface; Relay</b>         | Relay – max. contact rating: 1A at 30 V (resistive)                 |
| <b>Detection Range</b>                 | 0 – 8'  |
| <b>Distance Adjustment</b>             | 2 – 8' (rotating cam with linear adjustment)                        |
| <b>Max. Mounting Height</b>            | 8'  |
| <b>Detection Signal Duration</b>       | Infinite presence detection   |
| <b>Detection Time</b>                  | < 50 ms   |
| <b>Output Hold Time</b>                | Potentiometer range: 0.1 – 4.5 s                                    |
| <b>Operating Temperature Range</b>     | -30 – 140 °F  |
| <b>PCB Dimensions</b>                  |   |
| Primary                                | 10.91" (W) × 1.5" (H)   |
| Secondary                              | 8.75" (W) × 1.5" (H)  |
| <b>Connector to Door Controller</b>    | 8-position screw terminal on Primary PCB                            |
| <b>Primary-to-Secondary Connection</b> | Flat-ribbon cable with connectors and key lock                      |
| <b>Max. Number of Secondaries</b>      | 8   |
| <b>Functions Selection</b>             | Detection mode: NO or NC<br>Normal mode or Background Analysis mode |

## PRODUCT SERIES

See page 34...



# SUPERSCAN-T / INDUSTRIAL

ACTIVE INFRARED, SAFETY SENSOR



## PRODUCT SERIES

|                       |   |                     |  |
|-----------------------|---|---------------------|--|
| <b>10SSTI</b>         | 1 Primary<br>34 ½" end cap to end cap (for 36" doors)                       | <b>10SSHARDWARE</b> | SUPERSCAN-T hardware kit<br><i>Includes cord sheath, jamb caps with screws, and end caps with screws</i> |
| <b>10SSTICUSTOM</b>   | 1 Primary<br>Custom Length (13" min.)                                       | <b>10CAPKIT</b>     | (1) left + (1) right end caps and mounting screws  |
| <b>10SSTI40</b>       | 1 Primary<br>40" end cap to end cap (for 42" doors)                         | <b>20.5137</b>      | Primary harness, 6-conductor cable cut to 108" (9')  |
| <b>10SSTI42</b>       | 1 Primary<br>42" end cap to end cap (for 44" doors)                         | <b>30.0015</b>      | Ribbon connector cable connects primaries and secondaries  |
| <b>10SSTI48</b>       | 1 Primary<br>48" end cap to end cap (for 50"+ doors)                        | <b>41.3879</b>      | Adjustable mounting clips for primary and secondary  |
| <b>10SSTII</b>        | 1 Primary + 1 Secondary<br>34 ½" end cap to end cap (for 36" doors)         | <b>55.0001</b>      | Door cord jamb cap and screw   |
| <b>10SSTIICUSTOM</b>  | 1 Primary + 1 Secondary<br>Custom Length (24 ½" min.)                       | <b>70.0025</b>      | Aluminum housing, ordered per inch (stocked in 102" lengths)   |
| <b>10SSTII40</b>      | 1 Primary + 1 Secondary<br>40" end cap to end cap (for 42" doors)           | <b>70.0048</b>      | Aluminum housing cut to 38 ½"<br>(for a 40" SUPERSCAN-T)   |
| <b>10SSTII42</b>      | 1 Primary + 1 Secondary<br>42" end cap to end cap (for 44" doors)           | <b>70.0049</b>      | Aluminum housing cut to 40 ½"<br>(for a 42" SUPERSCAN-T)   |
| <b>10SSTII44</b>      | 1 Primary + 1 Secondary<br>44" end cap to end cap (for 46" doors)           | <b>70.0050</b>      | Aluminum housing cut to 46 ½"<br>(for a 48" SUPERSCAN-T)   |
| <b>10SSTII48</b>      | 1 Primary + 1 Secondary<br>48" end cap to end cap (for 50"+ doors)          | <b>70.0138</b>      | Lens piece, ordered per inch (stocked in 102" lengths)   |
| <b>10SSTIII</b>       | 1 Primary + 2 Secondaries<br>34 ½" end cap to end cap (for 36" doors)       | <b>70.0202</b>      | Standard 26" SUPERSCAN-T door cord sheath,<br>ordered per piece  |
| <b>10SSTIIICUSTOM</b> | 1 Primary + 2 Secondaries<br>Custom Length (34 ½" min.)                     | <b>70.0203</b>      | Lens piece cut to standard 33" lens<br>(for a 34 ½" SUPERSCAN-T)   |
| <b>10SSTIVCUSTOM</b>  | 1 Primary + 3 Secondaries<br>Custom Length (46 ½" min.)                     | <b>70.0304</b>      | SUPERSCAN-T hardware kit<br><i>Includes cord sheath and jamb caps with screws</i>                        |
| <b>10SSTSECONDARY</b> | SUPERSCAN-T secondary unit (no housing)<br><i>includes ribbon connector</i> | <b>70.0319</b>      | Lens piece cut to 38 ½"<br>(for a 40" SUPERSCAN-T)   |
| <b>10SSTPRIMARY</b>   | SUPERSCAN-T primary unit (no housing)                                       | <b>70.0320</b>      | Lens piece cut to 40 ½"<br>(for a 42" SUPERSCAN-T)   |
| <b>10SSQD</b>         | Quick disconnect for SUPERSCAN-T<br><i>one needed per door</i>              | <b>70.0321</b>      | Lens piece cut to 46 ½"<br>(for a 48" SUPERSCAN-T)   |
| <b>10GTSSHARN</b>     | SUPERSCAN-T / BODYGUARD-T Gyrotech relay harness                            |                     |  |
| <b>10HORTONSSHARN</b> | SUPERSCAN-T / BODYGUARD-T relay harness for use with Horton Control         |                     |  |



# BEAMBOX


ACTIVE INFRARED, MOTION AND PRESENCE SENSOR

## Off-Door Presence Detection

Three rows of five infrared spots ideal for unique off-door applications

## Multiple Preset Detection Zones

Four infrared immunity modes and nine unique preset patterns are available

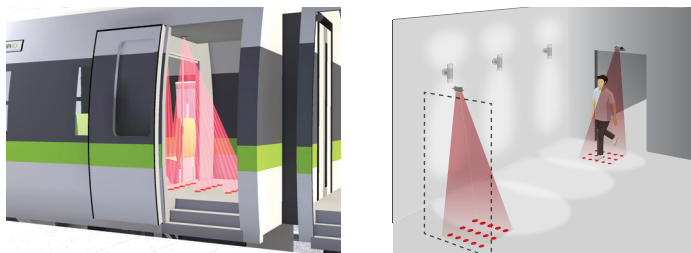

## TECHNICAL SPECIFICATIONS

|                                 |   |
|---------------------------------|---|
| <b>Technology</b>               | Active infrared with background analysis  |
| <b>Detection Mode</b>           | Motion and presence   |
| <b>Optical Features</b>         | 15 independent IR spots with a diameter of typ. 0.43"   |
| <b>Maximum Mounting Height</b>  | 8 1/2' (flush mounting)   |
| <b>Tilt Angles</b>              | 0 – 20° vertical in steps of 5°   |
| <b>Detection Zone</b>           | 3 3/10' (W) × 3 9/10' (D)<br>at mounting height 6 1/2' with tilt angle at 20°   |
| <b>Reaction Time</b>            | < 100 ms  |
| <b>Supply Voltage</b>           | 12 – 30 VAC ±10%;<br>12 – 45 VDC ±10%   |
| <b>Power Consumption</b>        | < 3 W (VA)  |
| <b>Output</b>                   | Relay (free of potential change-over contact)<br>42 VAC – 60 VDC<br>Max. Contact Current<br>1 A (resistive)<br>Max. Switching Power<br>30 W (DC) / 60 VA (AC) |
| <b>Monitoring Input</b>         | Optocoupled (free of potential)<br>Input Voltage<br>10 – 24 VDC<br>Input Current<br>< 10 mA (at 24 V)   |
| <b>Connection (Sensor Side)</b> | Unpluggable, integrated 7-pin connector   |
| <b>Hold Time</b>                | 0.5 – 9 s (adjustable)  |
| <b>LEDs</b>                     | Red and green   |
| <b>Mains Frequency</b>          | 50 – 60 Hz  |
| <b>Temperature Range</b>        | -13 – 126 °F (operating);<br>-22 – 140 °F (storage)   |
| <b>Degree of Protection</b>     | IP41  |
| <b>Dimensions</b>               | 5 1/2" (W) × 1 1/2" (H) × 2 1/8"  |
| <b>Weight</b>                   | 3 1/2 oz  |
| <b>Enclosure Material</b>       | PC  |
| <b>Color</b>                    | Black   |
| <b>Cable Length</b>             | 8'  |




## Customizable to Your Application

Typical detection area of 3 1/4 by 3 1/4 feet when mounted at a height of 7 feet

## Low-Profile Design

Recessed mounting for low-profile applications

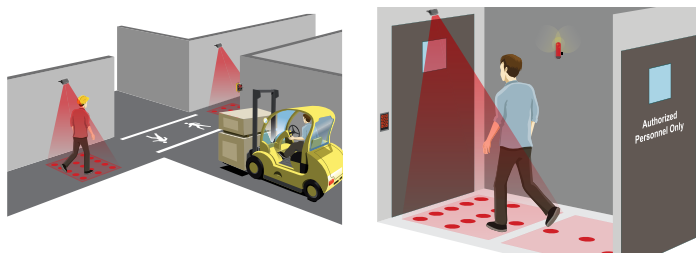


## PRODUCT SERIES

|                     |  |
|---------------------|--|
| <b>10BEAMBOX</b>    | Uses a 3 × 5 matrix of infrared spots (15 total) where each can be individually activated<br><i>Monitoring capable</i> |
| <b>10REMOTE</b>     | Universal remote control for sensor setup  |
| <b>10SPOTFINDER</b> | Active-infrared-spot finder  |

# LZR<sup>®</sup>-WIDESCAN



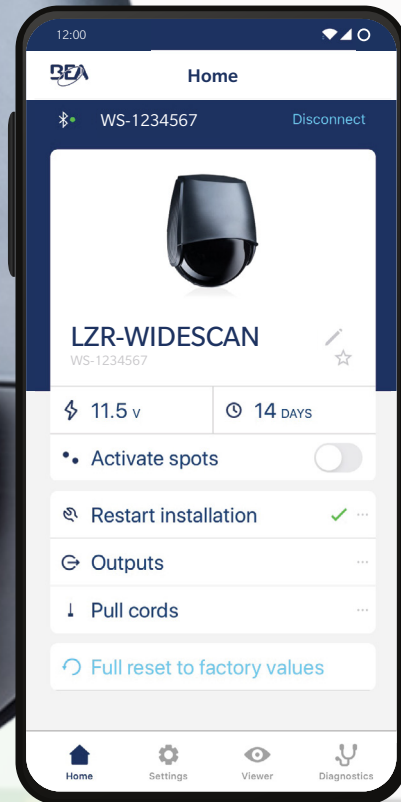

**Easily configure sensor settings with the LZR-WIDESCAN mobile app.  
The mobile app provides a complete view of sensor settings, from  
field configurations to immunity.**



**READ MORE ON PAGE 44**



## IS40 / XL

MOTION AND PRESENCE SENSORS FOR INDUSTRIAL DOORS

### Energy Savings


Bidirectional, unidirectional approach, and unidirectional depart microwave detection options

### Adjustable Detection Settings

Six modes of detection filtering are available for microwave immunity, as well as pedestrian and parallel traffic rejection

### Customizable Patterns

Nine unique infrared patterns capable of highly flexible presence detection in any industrial environment

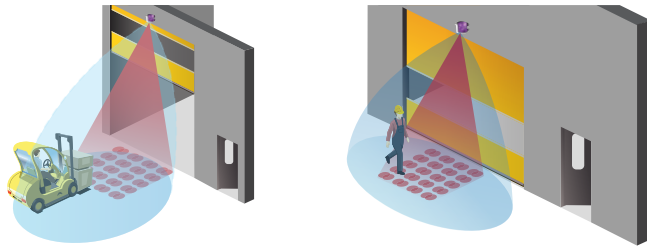

### TECHNICAL SPECIFICATIONS

|   |  |                              |
|---|--|------------------------------|
| <b>Technology</b>                         | Microwave Doppler radar                          | Active infrared              |
| <b>Detection Mode</b>                     | Motion   | Presence                     |
| <b>LED Activity</b>                       | Green (activation relay)                         | Red (presence relay)         |
| <b>Transmitter Frequency / Wavelength</b> | 24.150 GHz                                       | 875 nm                       |
| <b>Transmitter Power Density</b>          | < 5mW / cm <sup>2</sup>                          | < 250 mW / m <sup>2</sup>    |
| <b>Max. Detection Field</b>               |  |                              |
| IS40                                      | 13' x 16 1/2'                                    | 10' x 10'**                  |
| IS40XL                                    | 13' x 6 1/2'*                                    | 7 1/2' x 7 1/2'***           |
| <b>Output Hold Time</b>                   | 0.5 – 9 s  | 0.5 s                        |
| <b>Min. Detection Speed</b>               | 2 in/s   | 0 in/s to activate detection |
| <b>Tilt Angle</b>                         | -8 – 22°<br>(relative to sensor face)            | 15 – 45°                     |
| <b>Mains Frequency</b>                    | 50 – 60 Hz                                       |                              |
| <b>Power Consumption</b>                  | < 3.5 W  |                              |
| <b>Output</b>                             | 2 relays (free of potential change-over contact) |                              |
| Max. Contact Voltage                      | 42 VAC/VDC                                       |                              |
| Max. Contact Current                      | 1 A (resistive)                                  |                              |
| Max. Switching Power                      | 30 W (DC) / 48 VA (AC)                           |                              |
| <b>Installation Height</b>                |  |                              |
| IS40                                      | 8 – 16'  |                              |
| IS40XL                                    | 6 1/2' – 11 1/2'                                 |                              |
| <b>Temperature Range</b>                  | -22 – 140 °F                                     |                              |
| <b>Dimensions</b>                         | 3 3/4" (W) x 4" (H) x 5" (L)                     |                              |
| <b>Materials</b>                          | ABS, PC  |                              |
| <b>Cable Length</b>                       | 32'  |                              |
| <b>Degree of Protection</b>               | NEMA 4 / IP65                                    |                              |
| <b>Norm Conformity</b>                    | R&TTE: 1999 / 5 / EC<br>EMC 2004 / 108 / EEC     |                              |

\* Determines field size

\*\* Measured at 30° / Field size 9 / Mounting Height: 16', XL: 11 1/2'

\*\*\* Zone detected with the SPOTFINDER (i.e. slightly larger than the effective detection field)




### Reduce False Detections

Adjustable infrared immunity modes mitigate environmental disturbances such as subtle door vibrations, light, and sun


### Programmable Via Remote

Remote control programming enables user to quickly and safely make changes from the ground (sold separately)



### PRODUCT SERIES

|                      |  |
|----------------------|--|
| <b>10IS40</b>        | Dual technology industrial sensor utilizing microwave motion and active infrared presence detection                          |
| <b>10IS40XL</b>      | Dual technology industrial sensor utilizing microwave motion and active infrared presence detection for low mounting heights |
| <b>10INDBRACKET</b>  | Industrial mounting bracket  |
| <b>10MINIBRACKET</b> | Short, adjustable mounting bracket   |
| <b>10SPOTFINDER</b>  | Active infrared spotfinder   |
| <b>10REMOTE</b>      | Universal remote control for sensor setup  |
| <b>35.1566</b>       | 8-pin conductor cable (30')  |



# IXIO-DT1

MOTION AND PRESENCE SENSOR FOR AUTOMATIC, SLIDING DOORS



## Energy Efficient



Ten microwave activation sensitivity settings and three infrared safety immunity settings

## Precise Presence Detection

Two 24 spot, high density, infrared, safety curtains providing precise presence detection

## Easily Adjustable

Four visible, red, alignment spots are projected on the ground to assist in precise IR curtain adjustment



## Ease of Setup

Intelligent programming and troubleshooting via a menu-driven LCD

## Standards Compliant

Fully monitored internally, capable of external monitoring

## TECHNICAL SPECIFICATIONS

|                                   |  |   |
|-----------------------------------|--|---|
| <b>Technology</b>                 | Microwave Doppler radar  | Active infrared                                 |
| <b>Detection Mode</b>             | Motion   | Presence  |
| <b>Transmitter Frequency</b>      | 24.150 GHz   | N/A   |
| <b>Transmitter Radiated Power</b> | < 20 dBm EIRP  | N/A   |
| <b>Transmitter Power Density</b>  | < 5 mW / cm <sup>2</sup>   | N/A   |
| <b>Spot Size</b>                  | N/A  | 2" x 2"   |
| <b>Max. Number of Spots</b>       | N/A  | 24 per curtain                                  |
| <b>Max. Number of Curtains</b>    | N/A  | 2   |
| <b>Output</b>                     | Electro-mechanical-relay (potential and polarity free)                                       | Solid-state-relay (potential and polarity free) |
| Max. Contact Voltage              | 30 VDC   | 42 VAC/VDC                                      |
| Max. Contact Current              | 1 A  | 400 mA  |
| Hold Time                         | 0.5 – 9 s (user adjustable)  | 0.3 – 1 s                                       |
| <b>Test Input</b>                 |  |   |
| Sensitivity                       | Low: < 1 V<br>High: > 10 V (max. 30 V)   |   |
| Response time on test request:    | < 5 ms (typical)   |   |
| <b>Supply Voltage</b>             | 12 – 24 VAC ±10%; 12 – 30 VDC ±10% (to be operated from SELV compatible power supplies only) |   |
| <b>Power Consumption</b>          | < 2.5 W  |   |
| <b>Mounting Height</b>            | 6 ½ – 11 ½'  |   |
| <b>Temperature Range*</b>         | -13 – 131 °F<br>0 – 95% relative humidity, non-condensing                                    |   |
| <b>Degree of Protection</b>       | IP54   |   |
| <b>Applicable Directives</b>      | R&TTE 1999 / 5 / EC<br>LVD 2006 / 95 / EC<br>MD 2006 / 42 / EC<br>ROHS 2 2011 / 65 / EU      |   |


|                        |  |
|------------------------|--|
| <b>Dimension</b>       | 10 ¾" (W) x 2 ¼" (H) x 2 ¼" (D)  |
| <b>Cable Length</b>    | 10'  |
| <b>Norm Conformity</b> | ISO 13849-1:2008 PL «c» CAT. 2 (under the condition that the door control system monitors the sensor at least once per door cycle)<br>IEC 61496-1:2012 ESPE Type 2 |

\* LCD screen is operational from 14 to 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.

## PRODUCT SERIES

|                            |   |
|----------------------------|---|
| <b>10IXIODT1</b>           | Dual-technology sensor for sliding doors                            |
| <b>10ICA</b>               | IXIO ceiling accessory  |
| <b>10IMB</b>               | IXIO bracket accessory  |
| <b>10IRA</b>               | IXIO rain accessory   |
| <b>10CDA</b>               | IXIO curved door accessory  |
| <b>10IXIOSPACER</b>        | IXIO spacer (black)   |
| <b>35.1345</b>             | IXIO replacement cover (black)                                      |
| <b>35.1302</b>             | IXIO replacement cover (white)                                      |
| <b>35.1303</b>             | IXIO replacement cover (silver)                                     |
| <b>10RETROFITSPACERKIT</b> | Retrofit Spacer Kit - includes spacer, 2 ½" harness, and 9" harness |
| <b>20.5349</b>             | Wire harness (10')  |
| <b>20.5359</b>             | Wire harness (30')  |
| <b>20.5302</b>             | Optex-to-IXIO conversion harness                                    |
| <b>70.0173</b>             | IXIO wide antenna   |
| <b>70.0182</b>             | IXIO narrow antenna   |
| <b>10MINIBRACKET</b>       | Short, adjustable mounting bracket                                  |
| <b>10REMOTE</b>            | Universal remote control for sensor setup                           |





# IXIO-DT1 INDUSTRIAL

MOTION AND PRESENCE SENSOR FOR INTERIOR,  
INDUSTRIAL DOORS

## Energy Efficient


Ten microwave activation sensitivity settings and three infrared safety immunity settings

## Enhanced Accessibility

PRM mode for applications frequently used by persons with reduced mobility (e.g. wheelchair or elderly traffic)

## Precise Presence Detection

Two 24-spot, high-density, infrared safety curtains providing precise presence detection

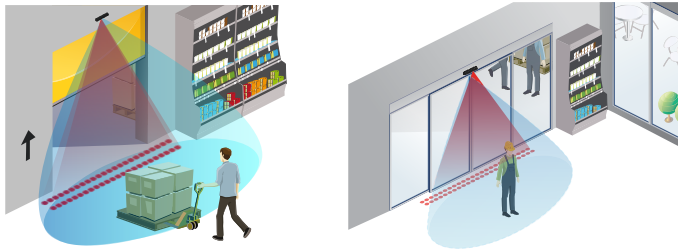

## Easily Adjustable


Four visible, red, alignment spots are projected on the ground to assist in precise IR curtain adjustment

## Ease of Setup

Intelligent programming and troubleshooting via a menu-driven LCD

## Standards Compliant

Fully monitored internally, capable of external monitoring



## TECHNICAL SPECIFICATIONS

|                                   |   |  |
|-----------------------------------|---|--|
| <b>Technology</b>                 | Microwave Doppler radar   | Active infrared                                    |
| <b>Detection Mode</b>             | Motion  | Presence   |
| <b>Transmitter Frequency</b>      | 24.150 GHz  | N/A  |
| <b>Transmitter Radiated Power</b> | < 20 dBm EIRP   | N/A  |
| <b>Transmitter Power Density</b>  | < 5 mW / cm <sup>2</sup>  | N/A  |
| <b>Spot Size</b>                  | N/A   | 2" x 2"  |
| <b>Max. Number of Spots</b>       | N/A   | 24 per curtain                                     |
| <b>Max. Number of Curtains</b>    | N/A   | 2  |
| <b>Output</b>                     | Electro-mechanical-relay<br>(potential and polarity free)                                       | Solid-state-relay<br>(potential and polarity free) |
| Max. Contact Voltage              | 30 VDC  | 42 VAC/VDC   |
| Max. Contact Current              | 1 A   | 400 mA   |
| Hold Time                         | 0.5 – 9 s<br>(user adjustable)  | 0.3 – 1 s  |
| <b>Test Input</b>                 |   |  |
| Sensitivity                       | Low: < 1 V;<br>High: > 10 V (max. 30 V)   |  |
| Response time on test request:    | < 5 ms (typical)  |  |
| <b>Supply Voltage</b>             | 12 – 24 VAC ±10%; 12 – 30 VDC ±10%<br>(to be operated from SELV compatible power supplies only) |  |
| <b>Power Consumption</b>          | < 2.5 W   |  |
| <b>Mounting Height</b>            | 6 ½ – 11 ½'   |  |
| <b>Temperature Range*</b>         | -13 – 131 °F<br>0 – 95% relative humidity, non-condensing                                       |  |
| <b>Degree of Protection</b>       | IP54  |  |
| <b>Applicable Directives</b>      | R&TTE 1999 / 5 / EC<br>LVD 2006 / 95 / EC<br>MD 2006 / 42 / EC<br>ROHS 2 2011 / 65 / EU         |  |
| <b>Dimension</b>                  | 10 ¾" (W) x 2 ¼" (H) x 2 ¼" (D)   |  |

|                        |   |
|------------------------|---|
| <b>Cable Length</b>    | 30'   |
| <b>Norm Conformity</b> | ISO 13849-1:2008 PL «c» CAT. 2<br>(under the condition that the door control system monitors the sensor at least once per door cycle)<br>IEC 61496-1:2012 ESPE Type 2 |

\* LCD screen is operational from 14 to 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.

## PRODUCT SERIES

|                            |   |
|----------------------------|---|
| <b>10IXIODT1INDUS</b>      | Dual-technology, industrial sensor utilizing microwave motion and active infrared presence sensor. <i>Includes 30' cable.</i> |
| <b>10ICA</b>               | IXIO ceiling accessory  |
| <b>10IMB</b>               | IXIO bracket accessory  |
| <b>10IRA</b>               | IXIO rain accessory   |
| <b>10CDA</b>               | IXIO curved door accessory  |
| <b>10IXIOSPACER</b>        | IXIO spacer (black)   |
| <b>35.1345</b>             | IXIO replacement cover (black)  |
| <b>35.1302</b>             | IXIO replacement cover (white)  |
| <b>35.1303</b>             | IXIO replacement cover (silver)   |
| <b>10RETROFITSPACERKIT</b> | Retrofit Spacer Kit - includes spacer, 2 ½" harness, and 9" harness   |
| <b>20.5349</b>             | Wire harness (10')  |
| <b>20.5359</b>             | Wire harness (30')  |
| <b>20.5302</b>             | Optex-to-IXIO conversion harness  |
| <b>70.0173</b>             | IXIO wide antenna   |
| <b>70.0182</b>             | IXIO narrow antenna   |
| <b>10MINIBRACKET</b>       | Short, adjustable mounting bracket  |
| <b>10REMOTE</b>            | Universal remote control for sensor setup   |



# IXIO-DT1V

MOTION AND PRESENCE SENSOR WITH CAMERA FOR AUTOMATIC, SLIDING DOORS



### Additional Camera Functionality

Provides an SDTV camera that shoots 30 frames of footage per second

### Easily Integrates


Integrates with building surveillance systems

### Upgrade IXIO In the Field

Video replacement kit available to upgrade any IXIO in the field

### Energy Efficient

Ten microwave, activation sensitivity settings and three infrared safety immunity settings

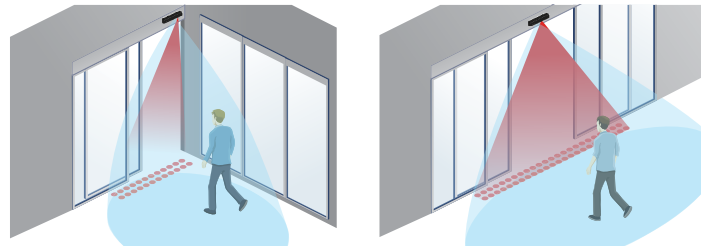

### TECHNICAL SPECIFICATIONS (SENSOR)

|                                   |   |   |
|-----------------------------------|---|---|
| <b>Technology</b>                 | Microwave Doppler radar                                   | Active infrared                                 |
| <b>Detection Mode</b>             | Motion  | Presence  |
| <b>Transmitter Frequency</b>      | 24.150 GHz  | N/A   |
| <b>Transmitter Radiated Power</b> | < 20 dBm EIRP   | N/A   |
| <b>Transmitter Power Density</b>  | < 5 mW / cm <sup>2</sup>                                  | N/A   |
| <b>Spot Size</b>                  | N/A   | 2" x 2"   |
| <b>Max. Number of Spots</b>       | N/A   | 24 per curtain                                  |
| <b>Max. Number of Curtains</b>    | N/A   | 2   |
| <b>Output</b>                     | Electro-mechanical-relay (potential and polarity free)    | Solid-state-relay (potential and polarity free) |
| Max. Contact Voltage              | 30 VDC  | 42 VAC/VDC                                      |
| Max. Contact Current              | 1 A   | 400 mA  |
| Hold Time                         | 0.5 – 9 s (user adjustable)                               | 0.3 – 1 s                                       |
| <b>Test Input</b>                 |   |   |
| Sensitivity                       | Low: < 1 V;<br>High: > 10 V (max. 30 V)                   |   |
| Response time on test request:    | < 5 ms (typical)  |   |
| <b>Supply Voltage*</b>            | 12 – 24 VAC ±10%; 12 – 30 VDC ±10%                        |   |
| <b>Power Consumption</b>          | < 2.5 W   |   |
| <b>Mounting Height</b>            | 6 ½ – 11 ½'   |   |
| <b>Temperature Range**</b>        | -13 – 131 °F<br>0 – 95% relative humidity, non-condensing |   |
| <b>Degree of Protection</b>       | IP54  |   |
| <b>Norm Conformity</b>            | R&TTE 1999 / 5 / EC<br>LVD 2006 / 95 / EC                 | MD 2006 / 42 / EC<br>ROHS 2 2011 / 65 / EU      |
| <b>Dimension</b>                  | 10 ¾" (W) x 2 ¼" (H) x 2 ¼" (D)                           |   |
| <b>Cable Length</b>               | 10'   |   |

\* To be operated from SELV-compatible power supplies only

\*\* LCD screen is operational from 14 to 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.

### Enhanced Accessibility

PRM mode for applications frequently used by persons with reduced mobility (e.g. wheelchair or elderly traffic)

### Precise Presence Detection

Two 24-spot, high-density, infrared safety curtains providing precise presence detection

### Standards Compliant

Fully monitored internally, capable of external monitoring



### TECHNICAL SPECIFICATIONS (CAMERA)

|                              |                                    |
|------------------------------|------------------------------------|
| <b>Voltage Regulator</b>     | 6.6 – 36 VDC ±10%, 6 – 28 VAC ±10% |
| <b>Operating Temperature</b> | -22 – 140 °F (max. RH: 95%)        |
| <b>Video Output</b>          | 1.0 (Vp-p) / 75Ω                   |
| <b>Image Sensor</b>          | CMOS                               |
| <b>Horizontal Resolution</b> | 480 TVL                            |
| <b>NTSC Output</b>           | 720 (H) x 480 (V)                  |
| <b>Sync System</b>           | Inter-Sync                         |
| <b>Frame Rate</b>            | 30 fps                             |
| <b>Minimum Illumination</b>  | 0.01 LUX                           |
| <b>AE Control</b>            | Auto                               |
| <b>Gain Control</b>          | Auto                               |
| <b>Electronic Shutter</b>    | 1 s ~ 1/10,000 s                   |
| <b>S/N Ratio</b>             | > 50 dB                            |
| <b>AWB</b>                   | Auto                               |

### PRODUCT SERIES

|                            |   |
|----------------------------|---|
| <b>10IXIODT1V</b>          | IXIO-DT1 with integrated video                                      |
| <b>10IMB</b>               | IXIO bracket accessory  |
| <b>10CDA</b>               | IXIO curved door accessory  |
| <b>10IXIOSPACER</b>        | IXIO spacer (black)   |
| <b>10.1279</b>             | IXIODT1V cover only and power supply harness                        |
| <b>10RETROFITSPACERKIT</b> | Retrofit Spacer Kit - includes spacer, 2 ½" harness, and 9" harness |
| <b>20.5349</b>             | Wire harness (10')  |
| <b>20.5359</b>             | Wire harness (30')  |
| <b>20.2009</b>             | IXIO-DT1V camera harness and power supply (8')                      |
| <b>70.0173</b>             | IXIO wide antenna   |
| <b>70.0182</b>             | IXIO narrow antenna   |
| <b>10MINIBRACKET</b>       | Short, adjustable mounting bracket                                  |
| <b>10REMOTE</b>            | Universal remote control for sensor setup                           |

# LOOKING OUT FOR YOU



# ULTIMO

AUTOMATIC SLIDING DOOR SENSOR WITH  
EXTENDED / ENHANCED SAFETY



Extended  
Safety



Enhanced  
Safety



Easy  
Installation



Convenient  
Programming



Standards  
Compliant

READ MORE ON PAGE 45



# LZR®-WIDESCAN

MOTION, PRESENCE, AND SAFETY SENSOR FOR INDUSTRIAL DOORS

## Easy Setup


Utilize mobile app to easily configure sensor settings (available on the Apple App Store and Google Play Store)

## Energy Efficient

Promotes energy savings by reducing false detections and unnecessary door cycling, helping to regulate HVAC


## Virtual Pull Cord

Virtual pull-cord function can differentiate between pedestrian and vehicle traffic and can provide pulse-on-stop activation

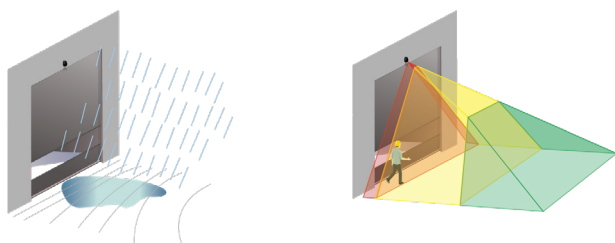

## TECHNICAL SPECIFICATIONS

|  |  |
|--|--|
| <b>Technology</b>                            | LASER scanner, Time-of-Flight measurement (7 LASER curtains)   |
| <b>Detection Mode</b>                        | Motion, presence, height, and speed  |
| <b>Max. Detection Field</b><br>Width / Depth | 1.2 x mounting height (adjustable depending on user settings)  |
| <b>Thickness of First Curtain</b>            | 1/4"   |
| <b>Typ. Mounting Height</b>                  | 6'6" – 32'   |
| <b>Typ. Minimum Object Size</b>              | 6" at 19'6" (in proportion to object distance)   |
| <b>Test Body Dimensions</b>                  | 27 1/2" x 11 3/4" x 7 3/4"   |
| <b>Min. Reflectivity Factor</b>              | > 2% (of floor and object) (measured at max. 19'6" in safety field)  |
| <b>Emission Characteristics</b>              |  |
| IR LASER                                     | Wavelength 905 nm; output power 0.10mW (CLASS 1)   |
| Red Visible LASER                            | Wavelength 635 nm; output power 0.95mW (CLASS 2)   |
| <b>Supply Voltage</b>                        | 12 – 24 VAC -10/+20%<br>12 – 30 VDC ±10% at sensor terminal  |
| <b>Power Consumption</b>                     |  |
| Heating: Off                                 | < 2.5 W  |
| Heating: Eco or Auto                         | < 10 W, max 15 W   |
| <b>Response Time</b>                         | Typ. 230 ms; max. 800 ms (depending on immunity settings)  |
| <b>Output</b>                                | 2 solid-state relays (galvanic isolation, polarity free)<br>24 VAC / 30 VDC (max. switching voltage) – 100 mA (max. switching current)<br>- in switching mode: NO / NC<br>- in frequency mode: pulsed signal (f= 100 Hz ±10%)<br><br>1 electro-mechanic relay (galvanic isolation, polarity free)<br>42 VAC/VDC (max. switching voltage) – 500 mA (max. switching current) |
| <b>Input</b>                                 | 30 VDC (max. switching voltage)<br>low < 1 V high > 10 V (voltage threshold)   |

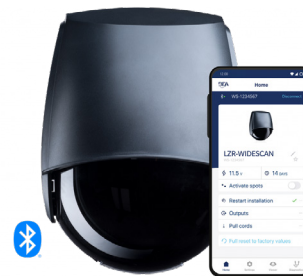


## Alternative Solution

Ideal for replacing costly and labor-intensive induction loop and pull-cord solutions

## Visible Spots


Two visible LASER alignment spots ensure accurate pattern placement

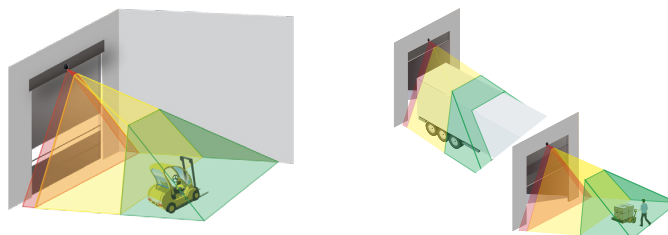

|                                   |   |
|-----------------------------------|---|
| <b>Bluetooth Communication</b>    | Operating bandwidth: 2402 - 2480 MHz<br>Max. transmitted power: 12 dBm      |
| <b>LED Activity</b>               | Tri-colored (x2)<br>Blue  |
|                                   | Output status / Remote control response / Error signals<br>Bluetooth status |
| <b>Dimensions</b>                 | 7 3/4" (H) x 6" (W) x 4" (D) (approx.)                                      |
| <b>Materials</b>                  | PC, ASA   |
| <b>Color</b>                      | Black   |
| <b>Rotation Angles on Bracket</b> | 45° to the right, 15° to the left (lockable)                                |
| <b>Tilt Angles on Bracket</b>     | -10 – 5°  |
| <b>Degree of Protection</b>       | NEMA 4 / IP65   |
| <b>Temperature Range</b>          | -22 – 140 °F  |
| <b>Norm Conformity</b>            | IEC 61000-6-2<br>IEC 61000-6-3<br>IEC 60950-1                               |
|                                   | IEC 60825-1<br>IEC 62061 SIL 2<br>ISO 13849-1 PL "d"/ CAT2                  |

## PRODUCT SERIES

|                      |   |
|----------------------|---|
| <b>10LZRWIDESCAN</b> | Motion, presence, and safety sensor   |
| <b>10WBWA</b>        | Universal mounting bracket  |
| <b>10WBAMOUNT</b>    | Universal mounting bracket plate  |
| <b>10INDBRACKET</b>  | Industrial mounting bracket<br><b>ADAPTER PLATE KIT (10.1311) IS REQUIRED</b> |
| <b>10MINIBRACKET</b> | Short, adjustable mounting bracket  |
| <b>10.1311</b>       | Adapter plate kit   |
| <b>35.1554</b>       | 30' cable   |
| <b>35.1555</b>       | 50' cable   |
| <b>41.8838</b>       | LZR-WIDESCAN replacement base   |
| <b>35.0245</b>       | LZR-WIDESCAN replacement cover  |
| <b>10PSMDR2024</b>   | DIN rail power supply,<br>100 – 240 VAC / 24 VDC                              |
| <b>10REMOTE</b>      | Universal remote control for sensor setup                                     |



# ULTIMO

AUTOMATIC SLIDING DOOR SENSOR WITH EXTENDED AND ENHANCED SAFETY

## Enhanced Safety


Positioning the inner, infrared safety curtain through the threshold allows for sustained presence detection in the door opening

When directed through the threshold, the inner, infrared safety curtain provides presence detection while the door is fully open and partial detection during the closing door cycle

## Easy Installation

Eight visible, red, alignment spots are projected onto the ground, verifying the location of the infrared curtains and helping to increase the accuracy of setup

Sensors automatically synchronize infrared frequency with ULTI-SYNC functionality, streamlining installation and retrofit applications\*

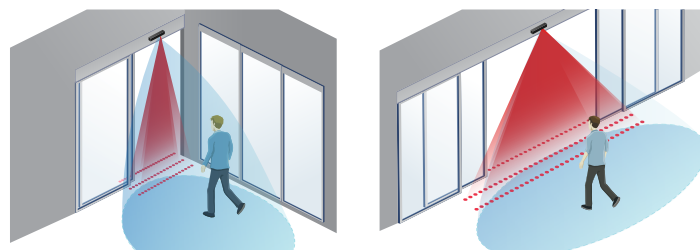

## TECHNICAL SPECIFICATIONS

|                                    |  |
|------------------------------------|--|
| <b>Mounting Height</b>             | 6'6" – 11'6"   |
| <b>Detection Mode</b>              | Motion and presence  |
| <b>Technology</b>                  | Microwave Doppler radar and active infrared (AIR) with background analysis |
| <b>Radar Detection Speed (min)</b> | 2 in/s   |
| <b>AIR Response Time (typ.)</b>    | < 200 ms (max. 500 ms)   |
| <b>Radar Transmitter</b>           |  |
| Frequency                          | 24.150 GHz   |
| Radiated Power                     | < 20 dBm EIRP  |
| Power Density                      | < 5 mW / cm <sup>2</sup>   |
| Lobe Angles                        | 0 – 45° (typical adjustment), default 25°                                  |
| <b>AIR Spots</b>                   |  |
| Size                               | 2" x 2" (typ.)   |
| Number of Spots                    | max. 32 per curtain  |
| Number of Curtains                 | 3  |
| Curtain Angles                     | -3 – 11°, default 0°   |
| <b>Relay Output 1</b>              | Electro-mechanical-relay (potential and polarity free)                     |
| Max. Contact Voltage               | 30 VDC   |
| Max. Contact Current               | 1 A  |
| Hold Time                          | 0.5 – 9 s  |
| <b>Optofet Output 2</b>            | Solid-state-relay (potential and polarity free)                            |
| Max. Contact Voltage               | 42 VAC/VDC   |
| Max. Contact Current               | 400 mA   |
| Hold Time                          | 0.3 – 1 s  |
| <b>Test / Monitoring Input</b>     |  |
| Sensitivity                        | Low: < 1 V; High: > 10 V (max. 30 V)                                       |
| Response Time on Request           | Typical: < 5 ms  |
| <b>Supply Voltage</b>              |  |
|                                    | 12 – 24 VAC ±10%   |
|                                    | 12 – 30 VDC ±10%   |
| <b>Power Consumption</b>           | < 3.2 W  |



## Convenient Programming

Easily define the microwave pattern shape, adjust the infrared curtain width, and review troubleshooting diagnostics via a menu-driven LCD


## Extended Safety

Three infrared curtains offer deeper and broader safety coverage in front of the door panels

## Standards Compliant

Fully monitored internally, capable of external monitoring complying with ANSI 156.10

\* ULTI-SYNC is cross-compatible with BEA and other sliding door sensors on the market.

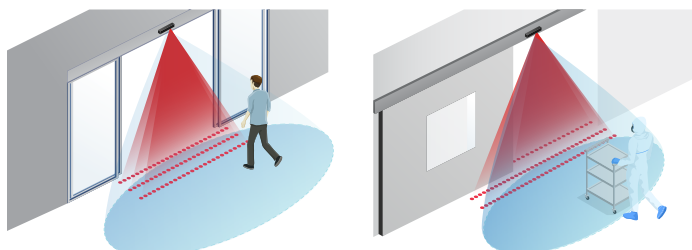

|                             |   |
|-----------------------------|---|
| <b>Temperature Range*</b>   | -13 – 131 °F<br>0 – 95% relative humidity, non-condensing                               |
| <b>Cable Length / Gauge</b> | 10' / 26 AWG  |
| <b>Degree of Protection</b> | IP54  |
| <b>Norm Conformity</b>      | R&TTE 1999 / 5 / EC<br>MD 2006 / 42 / EC<br>LVD 2006 / 95 / EC<br>ROHS 2 2011 / 65 / EU |

\* LCD screen is operational from 14 to 131 °F. The sensor may still be programmed in colder temperatures, but with the remote control.

## PRODUCT SERIES

|                            |   |
|----------------------------|---|
| <b>10ULTIMO</b>            | Dual-technology sensor for sliding doors                            |
| <b>10RETROFITSPACERKIT</b> | Retrofit Spacer Kit - includes spacer, 2 ½" harness, and 9" harness |
| <b>10ULTIMOSPACER</b>      | ULTIMO spacer   |
| <b>10OURA</b>              | Universal rain accessory  |
| <b>10UMB</b>               | ULTIMO mounting bracket   |
| <b>10.1351</b>             | ULTIMO replacement cover  |
| <b>20.5349</b>             | ULTIMO replacement harness (10')                                    |
| <b>10REMOTE</b>            | Universal remote control for sensor setup                           |



FC

FDA

# LZR®-U920 / U921

COMPACT, RAW DATA, LASER SCANNER

## Background Independent

Background or substrate has limited effect on measurements

## LASER-Based Measurements

Measurement range: up to 213 ft (65 m)





## Uni-Directional or Bi-Directional

Standard RS485 bus communication (bi-directional)

## Superior Object Recognition

No external illumination of target object necessary as compared to camera systems



## TECHNICAL SPECIFICATIONS

|                                 |   |                             |  |
|---------------------------------|---|-----------------------------|--|
| <b>Technology</b>               | LASER scanner, Time-of-Flight measurement   | <b>Degree of Protection</b> | NEMA 4 / IP65  |
| <b>Measurement Range</b>        | 30' (10 m) at 2% remission factor<br>98' (30 m) at 10% remission factor<br>213' (65 m) max. | <b>Temperature Range</b>    | -22 – 40 °F (-30 – 60 °C) if powered<br>14 – 140 °F (-10 – 60 °C) if unpowered   |
| <b>Number of Points/Plane</b>   | Max. 274  | <b>Humidity</b>             | 0 – 95% non-condensing   |
| <b>Number of Planes</b>         |   | <b>Vibrations</b>           | < 2 G  |
| LZR®-U920                       | 4   | <b>Norm Conformity</b>      | 2006 / 95 / EC: LVD<br>2011 / 65 / EU: RoHS 2<br>2004 / 108 / EC: EMC<br>EN 60529:2001<br>IEC 60825-1:2007 Laser Class 1&3R<br>EN 60950-1:2005<br>EN 61000-6-2:2005 EMC - Industrial level<br>EN 61000-6-3:2006 EMC - Commercial Level |
| LZR®-U921                       | 1   |                             |  |
| <b>Angular Resolution</b>       | Max. 0.3516°  |                             |  |
| <b>Angular Coverage</b>         | Max. 96°  |                             |  |
| <b>Rotating Speed</b>           | 900 turns / min   |                             |  |
| <b>Scanning Frequency</b>       |   |                             |  |
| LZR®-U920                       | 15 Hz   |                             |  |
| LZR®-U921                       | 60 Hz   |                             |  |
| <b>Serial Communication</b>     |   |                             |  |
| Type                            | Asynchronous  |                             |  |
| Interface                       | RS 485  |                             |  |
| Communication Mode              | Half-duplex (U920,U921)   |                             |  |
| Data Transmission Speed         | 460800 bit / sec (max. 921600 bit / sec)  |                             |  |
| Topology                        | Point-to-point  |                             |  |
| Symbol Coding                   | 1 start bit, 1 stop bit, no parity bit  |                             |  |
| File Type                       | 8 bits  |                             |  |
| <b>Remission Factor</b>         | > 2%  |                             |  |
| <b>Emission Characteristics</b> |   |                             |  |
| IR LASER                        | Wavelength 905 nm;<br>output power 0.10mW (CLASS 1)   |                             |  |
| Visible LASER                   | Wavelength 635 nm;<br>output power 0.95mW (CLASS 2)   |                             |  |
| <b>Peak Current at Power-on</b> | 1.8 A (max. 80 ms at 35 V)  |                             |  |
| <b>Supply Voltage</b>           | 10 – 35 VDC at sensor side  |                             |  |
| <b>Power Consumption</b>        | < 5 W   |                             |  |
| <b>Cable Length</b>             | 10'   |                             |  |
| <b>LED Activity</b>             |   |                             |  |
| Blue                            | Power-on status   |                             |  |
| Orange                          | Error status  |                             |  |
| Bi-colored (x2)                 | Function status   |                             |  |
| <b>Dimensions</b>               | 5" (W) × 2 ¾" (H) × 3 ½" (D)  |                             |  |
| <b>Materials</b>                | PC, ASA   |                             |  |
| <b>Color</b>                    | Black   |                             |  |

## PRODUCT SERIES

|                    |  |
|--------------------|--|
| <b>10LZR0920</b>   | Bidirectional, four-curtain sensor               |
| <b>10LZR0921</b>   | Bidirectional, one-curtain sensor                |
| <b>10PSMDR2024</b> | DIN rail power supply,<br>100 – 240 VAC / 24 VDC |
| <b>10PSVR5T</b>    | Voltage regulator, 24 VAC / 24 VDC               |

## LASER SCANNER FOR GATE & BARRIER APPLICATIONS

# LZR<sup>®</sup>-H100



BEA's LZR<sup>®</sup>-H100 is a LASER-based Time-of-Flight sensor designed for gate and barrier applications. This solution provides four LASER-based curtains, offering a three dimensional detection zone for accurate object detection. Its detection curtains are highly-configurable and can be set up for activation and presence detection in vehicle sensing applications.

The LZR-H100 is an effective alternative to induction loops and is housed in an IP65 rated enclosure, further ensuring its performance in outdoor environments.

[READ MORE ON PAGE 25](#)



**HIGH PRECISION  
PRESENCE**



**GROUND LOOP  
ALTERNATIVE**



**INDOOR / OUTDOOR  
INSTALLATION**




**TRAJECTORY  
DETECTION**





# BR2-900

2-RELAY, LOGIC MODULE + 900 MHz, WIRELESS TECHNOLOGY

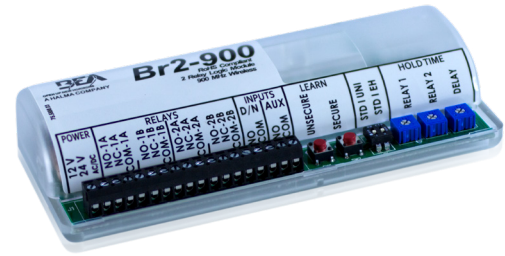


## Flexible

Sequenced or simultaneous relay activation for application flexibility

## Convenient

2 AMP relays allow the direct release of an electric locking device wirelessly, eliminating the need for a separate logic module or isolation relay

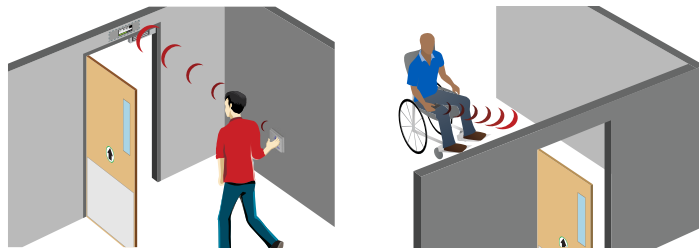


## Feature Rich

Extended Hold Mode allows wireless push plates to function like hardwired push plates (if push plate is held, relay does not time out)

## Saves Time and Money

Wireless functionality eliminates the need to run input wires directly to the logic module

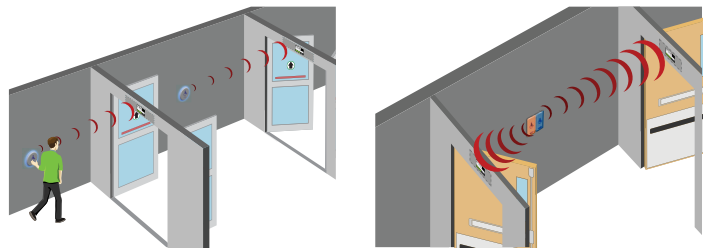

## TECHNICAL SPECIFICATIONS

|   |   |
|---|---|
| <b>Supply Voltage</b>                         | 12 – 24 VAC/VDC ±10%                                |
| <b>Current Consumption</b>                    | 45 mA DC<br>75 mA AC                                |
| <b>Frequency</b>                              | 908 – 918 MHz (frequency hooping)                   |
| <b>Emitted Radio Power</b>                    | -25 dBm (TX)  |
| <b>Power Consumption</b>                      | 0.5 – 1.5 W   |
| <b>Programmable Transmitters Per Receiver</b> | 75<br>(unlimited for 900 MHz Universal Transmitter) |
| <b>Temperature Rating</b>                     | -22 – 158 °F (-30 – 70 °C)                          |
| <b>Input</b>                                  |   |
| Day / Night (24 hr)                           | DRY contact   |
| AUX   | DRY contact   |
| <b>Contact Rating</b>                         |   |
| Relay 1 DPDT / Relay 2 DPDT                   | 2 A at 30 VDC or 2 A at 24 VAC                      |
| <b>LED Activity</b>                           |   |
| Blue  | Relay 1 activation                                  |
| White   | Relay 2 activation                                  |
| Red   | Radio frequency / Learn                             |
| Tri-color                                     | Signal strength                                     |
| <b>Certification</b>                          | FCC, IC   |
| <b>Dimensions</b>                             | 5 1/8" (W) × 1" (H) × 2 1/8" (D)                    |
| <b>Housing</b>                                | ABS (white translucent)                             |


## PRODUCT SERIES

|                    |  |
|--------------------|--|
| <b>10BR2-900</b>   | 2-relay logic module   |
| <b>10TD900HH1</b>  | Handheld transmitter, 900 MHz, 1-button (3-volt battery)         |
| <b>10TD900HH2</b>  | Handheld transmitter, 900 MHz, 2-button (3-volt battery)         |
| <b>10TD900HH3</b>  | Handheld transmitter, 900 MHz, 3-button (3-volt battery)         |
| <b>10TD900HH4</b>  | Handheld transmitter, 900 MHz, 4-button (3-volt battery)         |
| <b>10TD900HH1U</b> | Universal, 900 MHz transmitter                                   |
| <b>10T900PB</b>    | Wired, 900 MHz transmitter with flag connector (2 AAA batteries) |
| <b>109TD900TR</b>  | 900 MHz, touchless-retrofit transmitter                          |



# BR3-X

PROGRAMMABLE, 3-RELAY, LOGIC MODULE

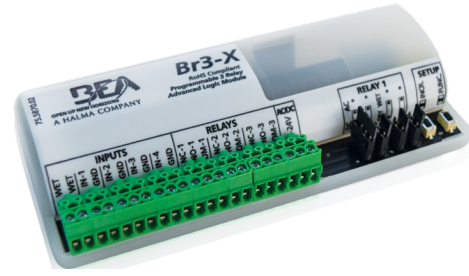

## Integrated Relays

Two 3 AMP relays and one 1 AMP relay, all with built-in surge suppression, eliminate the need for external components when installing some electric locking devices

## Customizable


Versatility with 13 programmable logic functions

## On-Board Power

WET output with AC/DC voltage for powering an electric locking device directly from the module

## Intuitive Programming

Two-button programming combined with dual seven-segment display provides simple setup

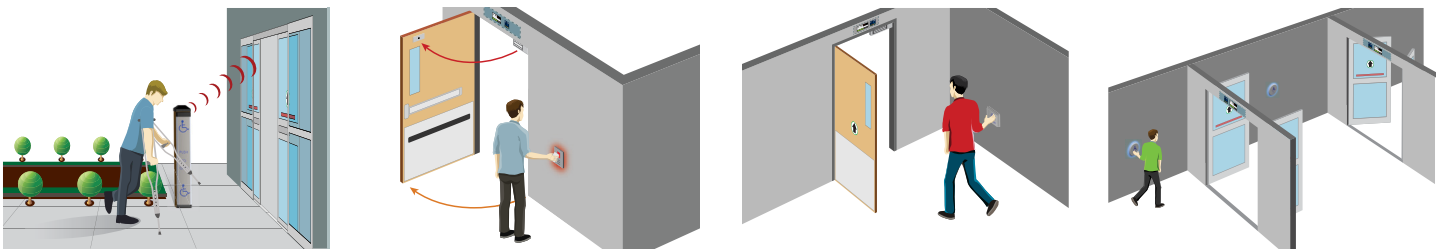

## TECHNICAL SPECIFICATIONS

|                             |   |
|-----------------------------|---|
| <b>Supply Voltage</b>       | 12 – 24 VAC/VDC ±10%                                      |
| <b>Power Consumption</b>    | 30 – 130 mA; DRY Output                                   |
| <b>Temperature Range*</b>   | -15 – 150 °F  |
| <b>Dimensions</b>           | 5 ½" (W) × 1" (H) × 2 ½" (D)                              |
| <b>Relay Hold Time</b>      | Up to 60 seconds per relay                                |
| <b>Delay Between Relays</b> | Up to 60 seconds per relay with ¼, ½ and ¾ second options |
| <b>Housing Material</b>     | ABS   |
| <b>Input Specification</b>  |   |
| Inputs 1, 2, 3, 4           | DRY contact   |
| WET Input                   | 5 – 24 VAC/VDC ±10%                                       |
| <b>Contact Rating</b>       |   |
| Relay 1 (DRY)               | 3 A at 24 VAC / 30 VDC                                    |
| Relay 1 (WET)               | 1 A   |
| Relay 2                     | 3 A at 24 VAC / 30 VDC                                    |
| Relay 3                     | 1 A at 24 VAC / 30 VDC                                    |

\* If powered by AC voltage and using WET output to convert to DC voltage and current draw of device is greater than 0.9 A, the upper temperature range is 130 °F.

## PRODUCT SERIES

|               |   |
|---------------|---|
| <b>10BR3X</b> | Programmable 3-relay logic module offering 13 functions, including day/night mode and normally locked and normally unlocked restroom modes<br><i>See page 94 for Restroom Kit and page 93 for Emergency Add-On Kit.</i> |
|---------------|---|

# LOCK-OUT MODULES

SWING-DOOR LOGIC USED WITH OVERHEAD PRESENCE SENSORS

## BODYGUARD-T Inhibition

Used to inhibit header-mounted safety sensors (BODYGUARD-T) while door is in closing cycle


## Built-in Door Position Recognition

Analyzes motor voltage



## Optional Safety Beam Input

To override inhibit signal during door closing



## TECHNICAL SPECIFICATIONS

|                                      |                           |
|--------------------------------------|---------------------------|
| Power Supply                         | 12 – 24 VAC / 15 – 24 VDC |
| Operating Frequency                  | 4 MHz (microprocessor)    |
| Power Consumption                    | 10 mA at rest, 50 mA max. |
| Output                               | 2x SPST relays            |
| Max. Voltage - Relay Contact         | 60 VDC / 120 VAC          |
| Max. Current - Relay Contacts (both) | 2 ADC, 0.5 AAC            |

## PRODUCT SERIES

|         |  |
|---------|--|
| 10LO21  | Lock-out relay                                 |
| 10LO21P | Universal lock-out relay for PARALLAX packages |
| 15.0075 | Harness for LO21 and LO21P                     |



# MATRIX FAMILY

UL LISTED, LOOP DETECTORS



## Two Loop Models Available


Available in single- or dual-loop models

## Dual Outputs

Two relay outputs

## Vehicle Detection, Direction, and Counting

Ideal for vehicle directionality and sequencing applications

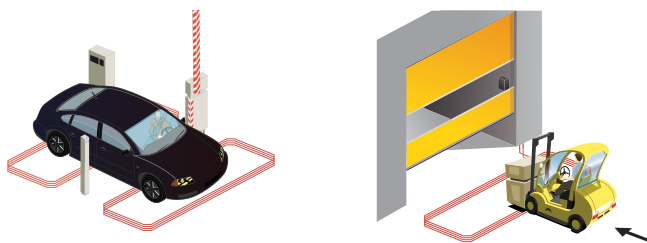


## Easy to Adjust

Settings are adjusted via two ease-to-use potentiometers

## Feature Rich

Pulse-on-entry and pulse-on-exit presence detection

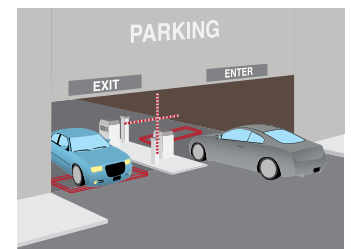

## TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| <b>Tuning</b>                            | Automatic   |
| <b>Connector</b>                         | 11-pin male (86CP11)  |
| <b>Presence Time</b>                     | 1 min – infinity  |
| <b>Pulse Time Output</b>                 | 100 ms or 500 ms  |
| <b>LED Activity</b>                      |   |
| Green                                    | Power   |
| Red                                      | Loop Status 1 / Loop Status 2   |
| <b>Frequency Range</b>                   | 20 kHz – 130 kHz  |
| <b>Frequency Steps</b>                   |   |
| Single Loop                              | 4   |
| Double Loop                              | 2 (for each loop)   |
| <b>Sensitivity (ΔL/L)</b>                | 0.005 – 0.5%  |
| <b>Reaction Time</b>                     |   |
| Single Loop                              | 25 ms   |
| Double Loop                              | 50 ms (each channel)  |
| <b>Setup Time After Configuration</b>    | 2 s max by channel  |
| <b>Power Supply (depending on model)</b> | 12 – 24 VAC/VDC ±10%<br>115 VAC ±10%                                  |
| <b>Power Frequency</b>                   | 48 – 62 Hz  |
| <b>Power Consumption</b>                 | < 2.5 W   |
| <b>Temperature Range</b>                 | -22 – 158 °F (-30 – 70 °C)  |
| <b>Protections</b>                       | Loop insulation transformer<br>Zener diodes<br>Gas discharge clamping |
| <b>Inductance Range</b>                  | 20 – 1000 μH  |
| <b>Connection</b>                        | 86CP11 (standard 11-pin, round)                                       |
| <b>Relay Outputs</b>                     | 2 (free potential change-over contact)<br>230 VAC<br>5 A (resistive)  |
| <b>Setup Time at Power On</b>            |   |
| MATRIXD/S                                | 8 s max by channel  |
| MATRIXIIS                                | 8 s max by channel  |
| MATRIX-3S                                | 1.6 s max by channel  |
| MATRIX-3D                                | 2.2 s max by channel  |

## Norm Conformity

R&TTE: 1999 / 5 / EC  
EMC: 89 / 336 / EEC  
EMC: 89 / 336 / EE  
EMC: 2004 / 108 / EC  
FCC: 47 CFR 15  
IC: RSS-210 ISSUE 5  
UL Listed equipment for UL508

## Degree of Protection

IP40

## Weight

7 oz

## Dimensions

1 ½" (W) × 3" (H) × 3" (D)


## PRODUCT SERIES

|                        |  |
|------------------------|--|
| <b>10MATRIXD110</b>    | Dual-loop detector (110 – 120 VAC)                               |
| <b>10MATRIXD1224</b>   | Dual-loop detector (12 – 24 VAC)                                 |
| <b>10MATRIXIIS110</b>  | Single-loop detector (110 – 120 VAC)                             |
| <b>10MATRIXIIS1224</b> | Single-loop detector (12 – 24 VAC)                               |
| <b>10MATRIX-3-D</b>    | Dual-loop detector (12 – 24 VAC)<br><i>socket NOT included</i>   |
| <b>10MATRIX-3-S</b>    | Single-loop detector (12 – 24 VAC)<br><i>socket NOT included</i> |
| <b>10MATRIXHARN</b>    | MATRIX harness, 11-pin, 72" (6') length                          |
| <b>10PSMDR2024</b>     | DIN rail power supply,<br>100 – 240 VAC / 24 VDC                 |
| <b>10PSST242</b>       | Plug-in power supply   |
| <b>70.0262</b>         | 11-pin, socket-based, DIN rail                                   |



## 300 MHz FAMILY

300 MHz, WIRELESS TRANSMITTERS AND RECEIVERS



### TECHNICAL SPECIFICATIONS

|                              |  |
|------------------------------|--|
| <b>Frequency</b>             | 300 MHz                                |
| <b>Radio Control Type</b>    | Analog                                 |
| <b>Input Voltage</b>         | 24 VAC/VDC                             |
| <b>Operating Temperature</b> | 14 – 131 °F (-10 – 55 °C)              |
| <b>Setup</b>                 | 10 DIP switch, access code programming |
| <b>Power</b>                 |  |
| 10T300HHX                    | (1) 9-volt battery                     |
| 10T300KEYCHAIN               | (1) 12-volt battery                    |
| 10T300MINIPB                 | (1) 12-volt battery                    |
| 10T300PB                     | (1) 9-volt battery                     |
| <b>Receiver Dimensions</b>   |  |
| Without Flange               | 4 9/10" (L) × 3 1/5" (W) × 1 3/5" (H)  |
| With Flange                  | 5 3/5" (L) × 3 1/5" (W) × 1 3/5" (H)   |
| <b>Norm Conformity</b>       | CE, FCC, IC                            |



### PRODUCT SERIES

|                       |   |
|-----------------------|---|
| <b>10R300</b>         | 300 MHz analog receiver   |
| <b>10T300HH</b>       | Handheld transmitter, 1-button (9-volt battery)                   |
| <b>10T300HHDBL</b>    | Handheld transmitter, 2-button (9-volt battery)                   |
| <b>10T300HH4</b>      | Handheld transmitter, 4-button (9-volt battery)                   |
| <b>10T300KEYCHAIN</b> | Keychain transmitter, 1-button (12-volt battery)                  |
| <b>10T300MINIPB</b>   | Miniature, hardwired transmitter, 1-button (12-volt battery)      |
| <b>10T300PB</b>       | Wired transmitter, no case, with flag connectors (9-volt battery) |
| <b>70.0260</b>        | Energizer battery, 12-volt  |
| <b>70.0261</b>        | Energizer battery, 9-volt   |



# 433 MHz FAMILY

433 MHz, WIRELESS TRANSMITTERS AND RECEIVERS



## TECHNICAL SPECIFICATIONS

|                              |  |
|------------------------------|--|
| <b>Frequency</b>             | 433 MHz  |
| <b>Radio Control Type</b>    | Digital  |
| <b>Emitted Radio Power</b>   | -28.7 dBm (transmitter)                                |
| <b>Power Consumption</b>     | 3mA (transmitter); 30mA (receiver)                     |
| <b>Power</b>                 |  |
| Hardwire                     | 1 9-volt or 3-volt battery                             |
| Handheld                     | 1 3-volt battery                                       |
| <b>Input Voltage</b>         | 12 – 24 VAC/VDC (receiver)                             |
| <b>Contact Rating</b>        | 1.0 A at 30 VDC<br>0.5 A at 125 VAC<br>0.3 A at 60 VDC |
| <b>Operating Temperature</b> | 14 – 131 °F (-10 – 55 °C)                              |
| <b>Capacity</b>              | 100 programmed transmitters (per receiver)             |
| <b>LED Activity</b>          |  |
| Red                          | Receiver/Transmitter learn                             |
| Blue                         | Relay activity   |
| <b>Dimensions</b>            |  |
| Receiver                     | 2 1/8" (W) x 1" (H) x 2 3/4" (D)                       |
| Transmitter                  | 1 3/8" (W) x 3/5" (H) x 2 3/4" (D)                     |
| <b>Norm Conformity</b>       | CE, FCC, IC  |


## PRODUCT SERIES

|                    |  |
|--------------------|--|
| <b>10RD433</b>     | 433 MHz analog receiver  |
| <b>10RD433EH</b>   | 433 MHz analog receiver with extended hold time                  |
| <b>10TD433HH1</b>  | Handheld transmitter, 433 MHz, 1-button (3-volt battery)         |
| <b>10TD433HH2</b>  | Handheld transmitter, 433 MHz, 2-button (3-volt battery)         |
| <b>10TD433HH3</b>  | Handheld transmitter, 433 MHz, 3-button (3-volt battery)         |
| <b>10TD433HH4</b>  | Handheld transmitter, 433 MHz, 4-button (3-volt battery)         |
| <b>10TD433PB3V</b> | Wired, 433 MHz transmitter with flag connector (3-volt battery)  |
| <b>10TD433PB9V</b> | Wired, 433 MHz transmitter with flag connectors (9-volt battery) |
| <b>30.5124</b>     | Lithium coin battery, 3-volt                                     |
| <b>70.0261</b>     | Energizer battery, 9-volt  |



# 900 MHZ FAMILY

LONG-RANGE, WIRELESS TRANSMITTERS AND RECEIVER

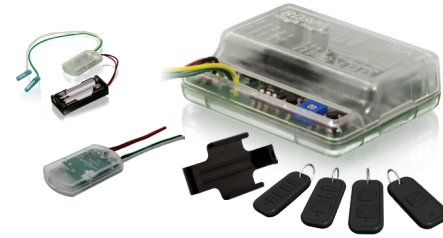

## Signal Strength Indicator



Multi-color LEDs on receiver provide installer with visual notification of signal strength and activation status

## Consistent Transmission

Frequency hopping allows consistent transmission in areas with other 900 MHz devices

## Enhances Accessibility

Offers a means of activation for those with limited mobility or disabilities



## Variety of Accessories

1, 2, 3, and 4 button handheld transmitters provide flexibility where multiple receivers are used

## Extended Hold Functionality

Extended hold and toggle/pulse functionality is integrated for various application needs

## Learn Modes

Delay and no-delay learn modes provide either instant or delayed activation for the sequencing of doors

## TECHNICAL SPECIFICATIONS

|  |  |                            |
|--|--|----------------------------|
| <b>Frequency</b>                           | 908 – 918 MHz (frequency hopping)                                |                            |
| <b>Radio Control Type</b>                  | Digital  |                            |
| <b>Power Consumption</b>                   |  |                            |
| Standard                                   | 30mA (TX) / 40mA (RX)  |                            |
| Industrial                                 | 13mA (TX) / 40mA (RX)  |                            |
| Retrofit                                   | 22 mA  |                            |
| Universal                                  | 30mA   |                            |
| <b>Supply Voltage</b>                      | 12 – 24 VAC/VDC  |                            |
| <b>Contact Rating</b>                      |  |                            |
|  | 1.0 A at 30 VDC  |                            |
|  | 0.3 A at 60 VDC  |                            |
|  | 0.5 A at 125 VAC   |                            |
| <b>Operating Temperature</b>               | 14 – 131 °F (-10 – 55 °C)  |                            |
| <b>Transmitter Capacity (per receiver)</b> |  |                            |
| Programmable (std)                         | 75   |                            |
| Universal                                  | Unlimited  |                            |
| <b>LED Activity</b>                        | Receivers:   | Transmitters:              |
|  | Red = receiver learn   | Red = transmitting         |
|  | Blue = relay activation  | Red Blinking = low battery |
|  | Tri-color = signal strength                                      |                            |
| <b>Dimensions</b>                          |  |                            |
| Transmitter                                | Standard Handheld: 2 3/4" (W) x 1 19/60" (D) x 1 1/25" (H)       |                            |
|  | Standard Push-Plate Transmitter: 1 3/4" (W) x 1" (D) x 3/10" (H) |                            |
|  | Industrial Handheld: 1 1/2" (W) x 3" (D) x 1/2" (H)              |                            |
|  | Retrofit: 1 18/25" (W) x 1 3/60" (D) x 8/25" (H)                 |                            |
| Receiver                                   | RD900: 2 1/2" (W) x 2" (D) x 3/4" (H)                            |                            |
| <b>Norm Conformity</b>                     | All: FCC, IC   |                            |
|  | Industrial Handheld: IP65  |                            |

## PRODUCT SERIES

|                      |  |
|----------------------|--|
| <b>10RD900</b>       | 900 MHz receiver module  |
| <b>10TD900HH1</b>    | Handheld transmitter, 900 MHz, 1-button (3-volt battery)         |
| <b>10TD900HH2</b>    | Handheld transmitter, 900 MHz, 2-button (3-volt battery)         |
| <b>10TD900HH3</b>    | Handheld transmitter, 900 MHz, 3-button (3-volt battery)         |
| <b>10TD900HH4</b>    | Handheld transmitter, 900 MHz, 4-button (3-volt battery)         |
| <b>10TD900HH1U</b>   | Universal, 900 MHz transmitter                                   |
| <b>10TD900INDHH1</b> | Handheld transmitter, 900 MHz, 1-button (NEMA 4 rated)           |
| <b>10TD900INDHH2</b> | Handheld transmitter, 900 MHz, 2-button (NEMA 4 rated)           |
| <b>10TD900INDHH3</b> | Handheld transmitter, 900 MHz, 3-button (NEMA 4 rated)           |
| <b>10TD900INDHH4</b> | Handheld transmitter, 900 MHz, 4-button (NEMA 4 rated)           |
| <b>10T900PB</b>      | Wired, 900 MHz transmitter with flag connector (2 AAA batteries) |
| <b>109TD900TR</b>    | 900 MHz, touchless-retrofit transmitter                          |
| <b>10BELTCLIP</b>    | Belt clip compatible with the industrial, handheld transmitters  |
| <b>30.5124</b>       | Lithium coin battery, 3-volt                                     |

HANDS-FREE DOOR ACTIVATION

# MAGIC SWITCH



**GO TOUCHLESS AT [WAVETOOPEN.COM](http://WAVETOOPEN.COM)**

A healthcare practitioner has her hands full. A person with limited mobility might run into challenges with accessibility. And others rather not touch public surfaces. As we run from point A to point B, we often don't think about opening doors. That is until we have to. Let's worry less and make door activation easier by the wave of a hand.

BEA's MAGIC SWITCH® Family provides a highly accessible and germ-free door activation without physical contact. Reduce touchpoints in fast-paced environments that depend on sanitation and hands-free access like healthcare, retail, industrial and commercial settings.

**READ MORE ON PAGES 64 - 68**



**HANDS-FREE  
ACTIVATION**



**DURABLE  
FACEPLATE**



**ADJUSTABLE  
DETECTION ZONE**



**ADJUSTABLE  
HOLD TIME**



# 4 ½" ROUND AND SQUARE PUSH PLATES

STAINLESS STEEL ACTUATORS

## Robust Design


⅛ inch thick stainless steel for maximum durability

## Vandal Resistant

Concealed fasteners to minimize vandalism

## Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

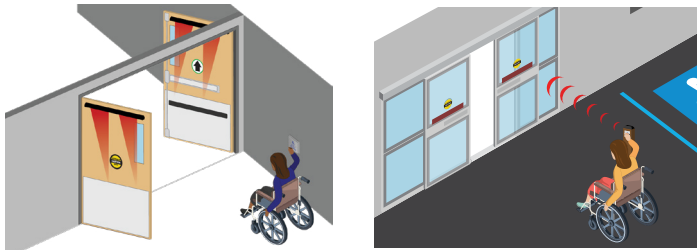

## TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| <b>Faceplate Material</b>              | Stainless steel (16 gauge, 304 2B)                              |
| <b>Backplate Material</b>              | Aluminum (⅛" thick)   |
| <b>Mounting Screws</b>                 | Stainless steel, 6-32 x 1" and 8-32 x 1"<br>Allen head size: ⅝₄ |
| <b>Cherry Switch</b>                   | Single-pole, 1 A, COM/NO/NC, UL Recognized                      |
| <b>Compatible Wireless Frequencies</b> | 900, 433, or 300 MHz  |
| <b>Dimensions</b>                      |   |
| Round                                  | 4 ½" (W) x ¾" (D)   |
| Square                                 | 4 ½" (W) x 4 ½" (H) x ¾" (D)                                    |




## Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

## Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic, and logo options available



## PRODUCT SERIES

|                   |  |
|-------------------|--|
| <b>10PBR45</b>    | 4 ½" round, stainless steel plate with blue "Push to Open" text                          |
| <b>10PBR451</b>   | 4 ½" round, stainless steel plate with blue accessibility logo and "Push to Open" text   |
| <b>10PBR4510</b>  | 4 ½" round, stainless steel, plain plate   |
| <b>10PBR45LL</b>  | 4 ½" round, stainless steel plate with blue accessibility logo                           |
| <b>10PBS2GBLK</b> | 4 ½" square, stainless steel plate with black "Push to Open" text                        |
| <b>10PBS45</b>    | 4 ½" square, stainless steel plate with blue "Push to Open" text                         |
| <b>10PBS451</b>   | 4 ½" square, stainless steel plate with blue accessibility logo and "Push to Open" text  |
| <b>10PBS4510</b>  | 4 ½" square, stainless steel, plain plate  |
| <b>10PBS45LL</b>  | 4 ½" square, stainless steel plate with blue accessibility logo                          |
| <b>10PBS45POD</b> | 4 ½" square, stainless steel plate with black "Press to Operate Door" text               |
| <b>10PBS45B</b>   | 4 ½" square, stainless steel plate with white "Push to Open" text                        |
| <b>10PBS451B</b>  | 4 ½" square, stainless steel plate with white accessibility logo and "Push to Open" text |
| <b>10PBS451AL</b> | 4 ½" square, stainless steel plate with alternative, blue accessibility logo             |

## MOUNTING OPTIONS

|                       |  |
|-----------------------|--|
| <b>10BOX45SQFM</b>    | Flush-mount box (4 ½" square)                                  |
| <b>10BOX45SQSM</b>    | Surface-mount box (4 ½" square)                                |
| <b>10BOX45RNDFM</b>   | Flush-mount box (4 ½" round)                                   |
| <b>10BOX45RND5M</b>   | Surface-mount box (4 ½" round)                                 |
| <b>10ESCUTCHEON45</b> | Stainless steel mounting option, used in place of mounting box |
| <b>10WRRND45</b>      | Weather ring (4 ½" round)                                      |

# 4 3/4" SQUARE PUSH PLATES

STAINLESS STEEL ACTUATORS



## Robust Design


1/16 inch thick stainless steel for maximum durability

## Vandal Resistant

Concealed fasteners to minimize vandalism

## Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

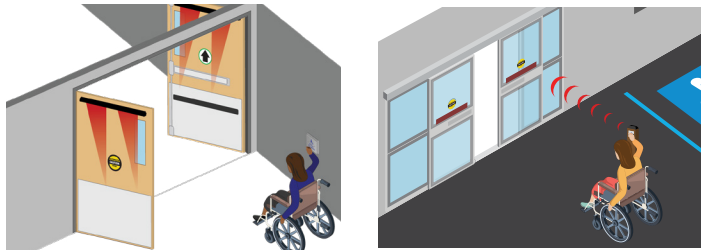

## Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

## Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic, and logo options available



## TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| <b>Faceplate Material</b>              | Stainless steel (16 gauge, 304 2B)                                |
| <b>Backplate Material</b>              | Aluminum (1/8" thick)   |
| <b>Mounting Screws</b>                 | Stainless steel, 6-32 x 1" and 8-32 x 1"<br>Allen head size: 5/64 |
| <b>Cherry Switch</b>                   | Single-pole, 1 A, COM/NO/NC, UL Recognized                        |
| <b>Compatible Wireless Frequencies</b> | 900, 433, or 300 MHz  |

## PRODUCT SERIES

|                 |   |
|-----------------|---|
| <b>10PBS</b>    | 4 3/4" square, stainless steel plate with blue "Push to Open" text  |
| <b>10PBS1</b>   | 4 3/4" square, stainless steel plate with blue accessibility logo and "Push to Open" text                                 |
| <b>10PBS10</b>  | 4 3/4" square, stainless steel, plain plate   |
| <b>10PBSLL</b>  | 4 3/4" square, stainless steel plate with blue accessibility logo   |
| <b>10PBSE</b>   | 4 3/4" square, stainless steel plate with blue "Push to Exit" text  |
| <b>10PBS1B</b>  | 4 3/4" square, stainless steel, blue plate with white accessibility logo and "Push to Open" text                          |
| <b>10PBS1SB</b> | 4 3/4" square, stainless steel plate (BHMA finish 606, satin brass) with blue accessibility logo and "Push to Open" text  |
| <b>10PBS1BB</b> | 4 3/4" square, stainless steel plate (BHMA finish 605, bright brass) with blue accessibility logo and "Push to Open" text |
| <b>10PBS1AL</b> | 4 3/4" square, stainless steel plate with alternative, blue accessibility logo  |
| <b>20.0044</b>  | Screw kit for all 4 3/4" square plates include:<br>(2) #6 and (2) # 8 screws<br>(2) flag connectors<br>(1) hex key        |

## MOUNTING OPTIONS

|                        |  |
|------------------------|--|
| <b>10BOX475SQSMEBA</b> | Surface-mount box (4 3/4" square) with easy battery access     |
| <b>10BOX475SQFM</b>    | Flush-mount box (4 3/4" square)                                |
| <b>10BOX475SQSM</b>    | Surface-mount box (4 3/4" square)                              |
| <b>10WRSQ475</b>       | Weather ring (4 3/4" square)                                   |
| <b>10PBBRACKET</b>     | Surface-mount kit (6" round and 4 3/4" square)                 |
| <b>10PBBRACKETCA</b>   | Surface-mount kit, clear anodized (6" round and 4 3/4" square) |

# 6" ROUND AND SQUARE PUSH PLATES

STAINLESS STEEL ACTUATORS

## Robust Design


1/16 inch thick stainless steel for maximum durability

## Vandal Resistant

Concealed fasteners to minimize vandalism

## Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

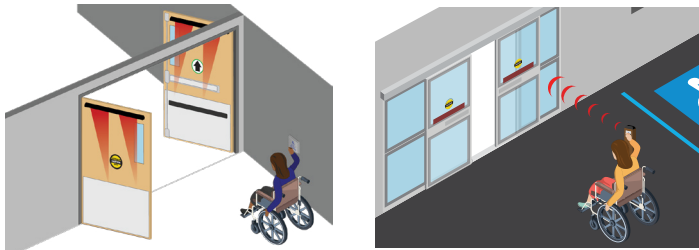

## TECHNICAL SPECIFICATIONS

|  |  |
|--|--|
| <b>Faceplate Material</b>              | Stainless steel (16 gauge, 304 2B)                             |
| <b>Backplate Material</b>              | Aluminum (1/8" thick)  |
| <b>Mounting Screws</b>                 | Stainless steel, 6-32 x 1" and 8-32 x 1" Allen head size: 5/64 |
| <b>Cherry Switch</b>                   | Single-pole, 1 A, COM/NO/NC, UL Recognized                     |
| <b>Compatible Wireless Frequencies</b> | 900, 433, or 300 MHz   |



## Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

## Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic, and logo options available



## PRODUCT SERIES

|                 |  |
|-----------------|--|
| <b>10PBR</b>    | 6" round, stainless steel plate with blue "Push to Open" text  |
| <b>10PBR1</b>   | 6" round, stainless steel plate with blue accessibility logo and "Push to Open" text                               |
| <b>10PBR10</b>  | 6" round, stainless steel, plain plate   |
| <b>10PBRLL</b>  | 6" round, stainless steel plate with blue accessibility logo   |
| <b>10PBR1AL</b> | 6" round, stainless steel plate with alternative, blue accessibility logo  |
| <b>10PBS6</b>   | 6" square, stainless steel plate with blue "Push to Open" text   |
| <b>10PBS61</b>  | 6" square, stainless steel plate with blue accessibility logo and "Push to Open" text                              |
| <b>10PBS610</b> | 6" square, stainless steel, plain plate  |
| <b>10PBS6LL</b> | 6" square, stainless steel plate with blue accessibility logo  |
| <b>20.0044</b>  | Screw kit for all 4 3/4" square plates include:<br>(2) #6 and (2) # 8 screws<br>(2) flag connectors<br>(1) hex key |

## MOUNTING OPTIONS

|                      |  |
|----------------------|--|
| <b>10BOX6SQFM</b>    | Flush-mount box (6" square)                                    |
| <b>10BOX6SQSM</b>    | Surface-mount box (6" square)                                  |
| <b>10BOX6RNDFM</b>   | Flush-mount box (6" round)                                     |
| <b>10BOX6RNDSM</b>   | Surface-mount box (6" round)                                   |
| <b>10PBBRACKET</b>   | Surface-mount kit (6" round and 4 3/4" square)                 |
| <b>10PBBRACKETCA</b> | Surface-mount kit, clear anodized (6" round and 4 3/4" square) |
| <b>10WRRND6</b>      | Weather ring (6" round)  |

# JAMB PUSH PLATES

STAINLESS STEEL ACTUATORS



## Robust Design

1/16 inch thick stainless steel for maximum durability

## Vandal Resistant

Concealed fasteners to minimize vandalism

## Available in Complete Kits



Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

## Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

## Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic and logo options available

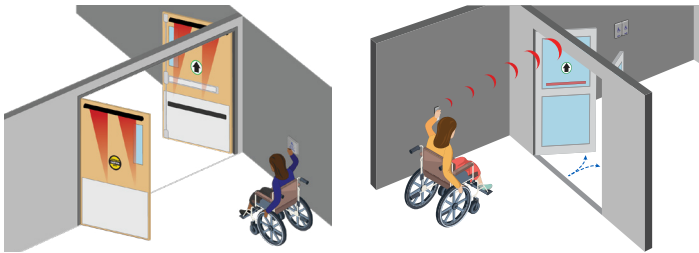

## TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| <b>Faceplate Material</b>              | Stainless steel (16 gauge, 304 2B)                                |
| <b>Backplate Material</b>              | Aluminum (1/8" thick)   |
| <b>Mounting Screws</b>                 | Stainless steel, 6-32 x 1" and 8-32 x 1"<br>Allen Head Size: 5/64 |
| <b>Cherry Switch</b>                   | Single-pole, 1 A, COM/NO/NC, UL Recognized                        |
| <b>Compatible Wireless Frequencies</b> | 900, 433, or 300 MHz  |
| <b>Dimensions</b>                      | 1 1/2" (W) x 4 3/4" (H) x 31/50" (D)                              |

## PRODUCT SERIES

|                  |   |
|------------------|---|
| <b>10PBJ</b>     | 1 1/2" x 4 3/4" jamb, stainless steel push plate with blue "Push to Open" text  |
| <b>10PBJ1</b>    | 1 1/2" x 4 3/4" jamb, stainless steel push plate with blue accessibility logo and "Push to Open" text   |
| <b>10PBJ10</b>   | 1 1/2" x 4 3/4" jamb, stainless steel, plain push plate   |
| <b>10PBJL</b>    | 1 1/2" x 4 3/4" jamb, stainless steel push plate with blue accessibility logo   |
| <b>10PBJE</b>    | 1 1/2" x 4 3/4" jamb, stainless steel push plate with blue "Push to Exit" text  |
| <b>10PBJSREV</b> | 1 3/4" x 4 1/2" jamb, stainless steel push plate with "Push to Slow" text with braille  |
| <b>10PBJ1B</b>   | 1 1/2" x 4 3/4" jamb, stainless steel, blue push plate with white accessibility logo and "Push to Open" text  |
| <b>10PBJLB</b>   | 1 1/2" x 4 3/4" jamb, stainless steel, blue push plate with white accessibility logo  |
| <b>10PBJM1</b>   | 1 1/2" x 4 3/4" jamb, stainless steel push plate with blue accessibility logo and "Push to Open" text<br><i>Includes microswitch with 2-stud touch points</i> |
| <b>10PBJML</b>   | 1 1/2" x 4 3/4" jamb, stainless steel push plate with blue accessibility logo<br><i>Includes microswitch with 2-stud touch points</i>                         |
| <b>10PBJMLL</b>  | 1 3/4" x 4 1/2" jamb, stainless steel push plate with blue accessibility logo<br><i>Includes microswitch with 2-stud touch points</i>                         |
| <b>10PBJMS1</b>  | 1 3/4" x 4 1/2" jamb, stainless steel push plate with blue accessibility logo and "Push to Open" text<br><i>Includes microswitch with 2-stud touch points</i> |

## MOUNTING OPTIONS

|                    |   |
|--------------------|---|
| <b>10BOXJAMBFM</b> | Flush-mount, jamb box (1 1/2" x 4 3/4" jamb)                    |
| <b>10BOXJAMBSM</b> | Surface-mount, jamb box (1 1/2" x 4 3/4" jamb)                  |
| <b>10BOXJAMBST</b> | Surface-mount, jamb box - hardwired only (1 3/4" x 4 1/2" jamb) |

*Be sure to match push plate dimensions with box dimensions - not all push plates are compatible with all mounting boxes.*

# LPR36 PUSH PLATE

FULL LENGTH, 36 INCH, HIGH-LOW ACTUATOR

## Enhances Accessibility

Offers a mean of activation of automatic doors for those with limited mobility or disabilities

## Low Profile, Aesthetically Pleasing Design




Low-profile (1 inch deep) design helps prevent accidental damage in high traffic areas

## Standard Compliant, High-Accessibility Plate

Exceeds California Building Code 2013, Page 559, 11B-404.2.9, Exception 2c

## Versatile Mounting

Easily installs on either walls or bollards for maximum mounting flexibility



## Easily Converts to Wireless

Available with convenient, built-in, wireless transmitter (300, 433, or 900 MHz frequencies) for wireless activation applications

## Full-Length Activation

Activation area of 36 by 6 inches (216 square inches)

*Not recommended for use in an environment where it will be directly exposed to water (e.g. outdoor, not protected from direct rain).*

## TECHNICAL SPECIFICATIONS

|                               |  |
|-------------------------------|--|
| <b>Contact Configurations</b> | SPST N.O.  |
| <b>Switching Voltage</b>      | 0.1 – 50 VDC   |
| <b>Switching Capacity</b>     | 1 W  |
| <b>Switching Current</b>      | 0.005 – 100 mA DC  |
| <b>Operation Temperature</b>  | -32 – 212 °F (-35 – 100 °C)  |
| <b>Materials</b>              |  |
| Base                          | Aluminum (6063)  |
| Face Plate                    | Stainless steel (304)  |
| Switch Actuator               | Nylon (66)   |
| End Cap                       | ABS (UL94)   |
| Hardware                      | Stainless steel  |
| <b>Compliance</b>             | California Building Code 2013, Page 559, 11B-404.2.9, Exception 2c |

## PRODUCT SERIES

|                      |   |
|----------------------|---|
| <b>10LPR36-300</b>   | 36" vertical, actuation bar with text and logo + 300 MHz Wireless |
| <b>10LPR36L-300</b>  | 36" vertical, actuation bar with logo only + 300 MHz Wireless     |
| <b>10LPR36-433</b>   | 36" vertical, actuation bar with text and logo + 433 MHz Wireless |
| <b>10LPR36L-433</b>  | 36" vertical, actuation bar with logo only + 433 MHz Wireless     |
| <b>10LPR36-900</b>   | 36" vertical, actuation bar with text and logo + 900 MHz Wireless |
| <b>10LPR36L-900</b>  | 36" vertical, actuation bar with logo only + 900 MHz Wireless     |
| <b>10LPR36-HW</b>    | 36" vertical, actuation bar with text and logo (hardwired only)   |
| <b>10LPR36L-HW</b>   | 36" vertical, actuation bar with logo only (hardwired only)       |
| <b>10LPR36CAPKIT</b> | Top and bottom replacement caps for the LPR36                     |
| <b>10R300</b>        | 300 MHz analog receiver   |
| <b>10RD433</b>       | 433 MHz analog receiver   |
| <b>10RD433EH</b>     | 433 MHz analog receiver, extended hold time                       |
| <b>10RD900</b>       | 900 MHz receiver module   |
| <b>10WCK433</b>      | Wireless conversion kit, converts hardwired to 433 Wireless       |
| <b>10WCK900</b>      | Wireless conversion kit, converts hardwired to 900 Wireless       |



# PANTHER PUSH PLATES

PUSH PLATES WITH INTEGRATED WIRELESS TECHNOLOGY




## Wireless Compatibility

Reduces installation time by eliminating the need to run wires from the push plate or use additional mounting hardware

## Enhanced Accessibility

Offers a means of activation of automatic doors for those with limited mobility or disabilities

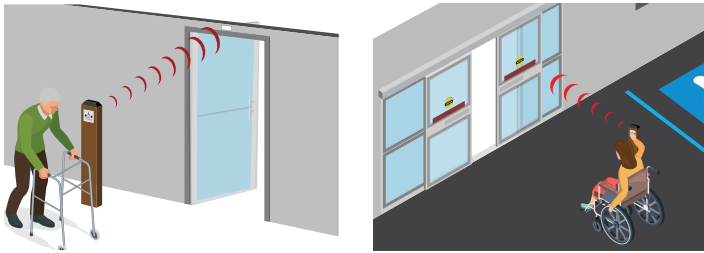

## Vandal Resistant

Concealed fasteners minimize vandalism

## Weather Rated

IP65-rated housing creates a weather-resistant barrier that enables the push plates to be mounted in outdoor environments or wash-down applications

## TECHNICAL SPECIFICATIONS

### Dimensions

|              |  |
|--------------|--|
| 6" Round     | 6 1/3" (ø) × 1 9/32" (D)                 |
| 4.75" Round  | 5 3/25" (ø) × 1 21/50" (D)               |
| 4.75" Square | 5 3/25" (W) × 5 3/25" (H) × 1 21/50" (D) |

### Weight

|              |          |
|--------------|----------|
| 6" Round     | 1.2 lbs  |
| 4.75" Round  | 1.14 lbs |
| 4.75" Square | 1.04 lbs |

### Mounting Options

Surface or bollard

### Transmitter Frequency\*

433 MHz or 900 MHz\*\*

### Power

|         |                   |
|---------|-------------------|
| 433 MHz | (1) 12 V type A23 |
| 900 MHz | (2) CR2032        |

### Materials

|           |                                    |
|-----------|------------------------------------|
| Faceplate | Stainless steel (16 gauge, 304 2B) |
| Housing   | ABS                                |

### Degree of Protection

IP65  
FCC IC Part 15 Approved

\* Corresponding frequency receiver required.

\*\* See 433 MHz and 900 MHz User's Guides for more information on BEA's wireless transmitters and receivers.

## PRODUCT SERIES

|                       |  |
|-----------------------|--|
| <b>10EMR475</b>       | 4 3/4" round, "Push to Open" text only; with integrated 433 MHz transmitter                    |
| <b>10EMR475-900</b>   | 4 3/4" round, "Push to Open" text only; with integrated 900 MHz transmitter                    |
| <b>10EMR475L</b>      | 4 3/4" round, accessibility logo only; with integrated 433 MHz transmitter                     |
| <b>10EMR475L-900</b>  | 4 3/4" round, accessibility logo only; with integrated 900 MHz transmitter                     |
| <b>10EMR475L1</b>     | 4 3/4" round, "Push to Open" text and accessibility logo; with integrated 433 MHz transmitter  |
| <b>10EMR475L1-900</b> | 4 3/4" round, "Push to Open" text and accessibility logo; with integrated 900 MHz transmitter  |
| <b>10EMR6</b>         | 6" round, "Push to Open" text only; with integrated 433 MHz transmitter                        |
| <b>10EMR6-900</b>     | 6" round, "Push to Open" text only; with integrated 900 MHz transmitter                        |
| <b>10EMR6L</b>        | 6" round, accessibility logo only; with integrated 433 MHz transmitter                         |
| <b>10EMR6L-900</b>    | 6" round, accessibility logo only; with integrated 900 MHz transmitter                         |
| <b>10EMR61</b>        | 6" round, "Push to Open" text and accessibility logo; with integrated 433 MHz transmitter      |
| <b>10EMR61-900</b>    | 6" round, "Push to Open" text and accessibility logo; with integrated 900 MHz transmitter      |
| <b>10EMS475</b>       | 4 3/4" square, "Push to Open" text only; with integrated 433 MHz transmitter                   |
| <b>10EMS475-900</b>   | 4 3/4" square, "Push to Open" text only; with integrated 900 MHz transmitter                   |
| <b>10EMS475L</b>      | 4 3/4" square, accessibility logo only; with integrated 433 MHz transmitter                    |
| <b>10EMS475L-900</b>  | 4 3/4" square, accessibility logo only; with integrated 900 MHz transmitter                    |
| <b>10EMS475L1</b>     | 4 3/4" square, "Push to Open" text and accessibility logo; with integrated 433 MHz transmitter |
| <b>10EMS475L1-900</b> | 4 3/4" square, "Push to Open" text and accessibility logo; with integrated 900 MHz transmitter |
| <b>15.5039</b>        | Spare PCB for PANTHER plate - 433 series   |
| <b>15.5142</b>        | Spare PCB for PANTHER plate - 900 series   |

# SINGLE GANG PUSH PLATES

STAINLESS STEEL ACTUATORS

## Robust Design


1/16 inch thick stainless steel for maximum durability

## Vandal Resistant

Concealed fasteners to minimize vandalism

## Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

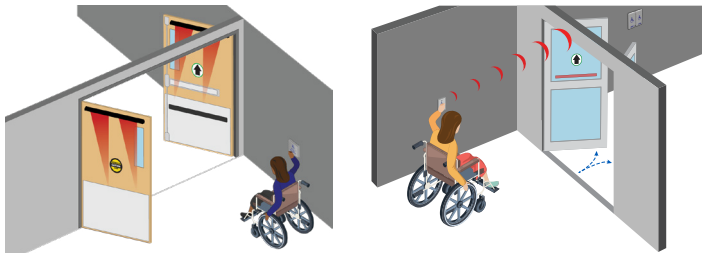

## TECHNICAL SPECIFICATIONS

|                                 |   |
|---------------------------------|---|
| Faceplate Material              | Stainless steel (16 gauge, 304 2B)                                |
| Backplate Material              | Aluminum (1/8" thick)   |
| Mounting Screws                 | Stainless steel, 6-32 x 1" and 8-32 x 1"<br>Allen head size: 5/64 |
| Cherry Switch                   | Single-pole, 15 A, COM/NO/NC, UL Recognized                       |
| Compatible Wireless Frequencies | 900, 433, or 300 MHz  |



## Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

## Highly Compatible and Customizable

Compatible with both surface- and flush-mount boxes; various text, graphic, and logo options available



## PRODUCT SERIES

|           |  |
|-----------|--|
| 10PBO241  | Single-gang, stainless steel push plate with blue accessibility logo and "Push to Open" text |
| 10PBO2410 | Single-gang, stainless steel, plain push plate   |
| 10PBO24L  | Single-gang, stainless steel push plate with blue accessibility logo                         |
| 10PBO24E  | Single-gang, stainless steel push plate with blue "Push to Open" text                        |

## MOUNTING OPTIONS

|             |   |
|-------------|---|
| 10BOX24SGSM | Standard single-gang, surface-mount box (2 3/4" x 4 1/2") |
|-------------|---|

# VESTIBULE PLATES

STAINLESS STEEL ACTUATORS




## Robust Design

1/16 inch thick stainless steel for maximum durability

## Available in Complete Kits

Complete kits available including plates, mounting boxes, and optional wireless devices for ease of ordering

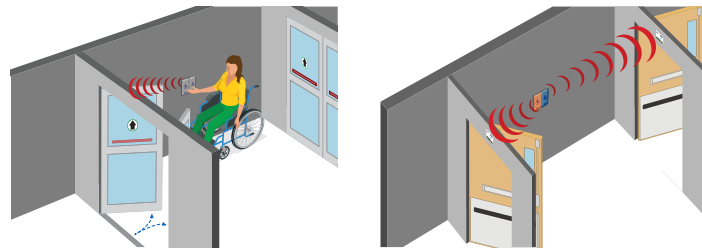

## TECHNICAL SPECIFICATIONS

|  |   |
|--|---|
| <b>Faceplate Material</b>              | Stainless steel (16 gauge, 304 2B)                                |
| <b>Backplate Material</b>              | Aluminum (1/8" thick)   |
| <b>Mounting Screws</b>                 | Stainless steel, 6-32 x 1" and 8-32 x 1"<br>Allen head size: 5/64 |
| <b>Cherry Switch</b>                   | Single-pole, 15 A, COM/NO/NC, UL Recognized                       |
| <b>Compatible Wireless Frequencies</b> | 900, 433, or 300 MHz  |
| <b>Dimensions</b>                      | 4 3/4" (W) x 4 3/4" (H) x 31/50" (D)                              |

## Vandal Resistant

Concealed fasteners to minimize vandalism

## Enhances Accessibility

ADA-compliant push plates are available in a variety of popular faceplate graphic options

## PRODUCT SERIES

|                 |  |
|-----------------|--|
| <b>10PBDGP1</b> | Stainless steel dual Push Plate for vestibule includes:<br><br>One (1) adapter ring, two (2) separate Push Plates with "Push to Open" text and accessibility logo<br><br><i>Requires two (2) 10TD433PB3V or two (2) 10TD900PB transmitters</i> |
|-----------------|--|

## MOUNTING OPTIONS

|                         |  |
|-------------------------|--|
| <b>10BOX475SQSMEBA</b>  | Surface-mount box (4 3/4" square) with easy battery access<br><i>Adapter ring 50.5016 required</i> |
| <b>10BOX475SQSM</b>     | Surface-mount box (4 3/4" square)<br><i>Adapter ring 50.5016 required</i>                          |
| <b>10BOX475SQFM</b>     | Flush-mount box (4 3/4" square)<br><i>Adapter ring 50.5016 required</i>                            |
| <b>10BOXDGSM</b>        | Surface-mount box, double gang<br><i>Adapter ring 50.5016 required</i>                             |
| <b>10BOLLARD SERIES</b> | Bollard (see page 96)  |
| <b>50.5016</b>          | Adapter ring   |





## MS09



IP65 RATED, MICROWAVE, TOUCHLESS ACTUATOR

### Weather-Resistant Housing

IP65 enclosure capable of use in industrial and extreme environments, as well as wash-down facilities

### Adjustable Detection Zone

User-defined detection zone from 4 to 24 inches (pulse or toggle)



### Appropriate for All Environments

Can be used in a variety of indoor and outdoor applications

### No Mounting Accessories Needed

External mounting boxes are not required

## TECHNICAL SPECIFICATIONS

|                               |  |
|-------------------------------|--|
| <b>Technology</b>             | Microwave motion sensor  |
| <b>Radiated Frequency</b>     | 24.125 GHz   |
| <b>Radiated Power Density</b> | < 5 mW / cm <sup>2</sup>   |
| <b>Supply Voltage</b>         | 12 – 24 VAC ±10%<br>12 – 24 VDC +30% / -10%<br>(to be operated from SELV-compatible power supplies only) |
| <b>Supply Frequency</b>       | 50 – 60 Hz   |
| <b>Power Consumption</b>      | < 1.5 W  |
| <b>Output</b>                 | Relay with switch-over contact (voltage-free)  |
| Max. Contact Voltage          | 60 VDC / 125 VAC   |
| Max. Contact Current          | 1 A (resistive)  |
| Max. Switching Power          | 30 W (DC) / 60 VAC   |
| <b>Detection Range*</b>       | 4 – 24" (adjustable)   |
| <b>Detection Mode</b>         | Motion (bidirectional)   |
| <b>Output Hold Time</b>       | 0.5 – 30 sec   |
| <b>Temperature Range</b>      | -4 – 131 °F (-20 – 55 °C)  |
| <b>Weight</b>                 | 0.34 lbs   |
| <b>Materials</b>              | ASA, PC  |
| <b>Degree of Protection</b>   | IP65   |
| <b>Certification</b>          | EMC: 2004 / 108 / EC<br>FCC: G9B-210161<br>IC: 4680A-210161  |

\* See User's Guide.

## PRODUCT SERIES

|                  |  |
|------------------|--|
| <b>10MS09TL</b>  | MAGIC SWITCH MS09 microwave cell with single-gang, white faceplate (text and logo) |
| <b>10MS09L</b>   | MAGIC SWITCH MS09 microwave cell with single-gang, white faceplate (logo only)     |
| <b>10RD900</b>   | 900 MHz receiver module  |
| <b>10TD900TR</b> | 900 MHz retrofit transmitter   |



# MS21

SHORT RANGE, CAPACITIVE, TOUCHLESS ACTUATOR

### Ideal for Close Quarter Environments

Short-range detection zone reduces unwanted activations

### Highly Visible

LED-illuminated mounting ring increases visibility

### Durable, Weather-Resistant Design

Stainless steel faceplate is ideal for harsh environments

### Aesthetically Pleasing

Low profile, beveled design reduces accidental damage



### Various Artwork Options

Various faceplate graphic options available

### Adjustable Features

Adjustable audible alerts, visual alerts, and touchless detection zones

### Universally Compatible with Automatic Doors

Compatible with all automatic door control makes and models



## TECHNICAL SPECIFICATIONS

|                             |  |
|-----------------------------|--|
| <b>Technology Type</b>      | Capacitive sensing                                   |
| <b>Detection Mode</b>       | Proximity  |
| <b>Supply Voltage</b>       | 12 – 24 VAC/VDC                                      |
| <b>Current Consumption</b>  | 37 mA (typical)                                      |
| <b>Temperature Range</b>    | -20 – 120 °F   |
| <b>Degree of Protection</b> | IP65   |
| <b>Sensing Zone*</b>        | 0 – 4"   |
| <b>Relay</b>                | 1 Form A solid-state relay; 0.4 A, 60 VAC/VDC (max.) |
| <b>Cable Length</b>         | 6" (5-conductor)                                     |
| <b>Materials</b>            |  |
| Faceplate                   | Stainless steel                                      |
| Backplate, Enclosure        | Clear PC   |
| Mounting ring               | Clear PC   |

\* See User's Guide.

## PRODUCT SERIES

|                   |   |
|-------------------|---|
| <b>10MS21HR1</b>  | MAGIC SWITCH MS21 with stainless steel, 6 inch round faceplate (text and logo)    |
| <b>10MS21HR</b>   | MAGIC SWITCH MS21 with stainless steel, 6 inch round faceplate (text only)        |
| <b>10MS21HRLL</b> | MAGIC SWITCH MS21 with stainless steel, 6 inch round faceplate (logo only)        |
| <b>10MS21HS1</b>  | MAGIC SWITCH MS21 with stainless steel, 4.75 inch round faceplate (text and logo) |
| <b>10MS21HS</b>   | MAGIC SWITCH MS21 with stainless steel, 4.75 inch round faceplate (text only)     |
| <b>10MS21HSL</b>  | MAGIC SWITCH MS21 with stainless steel, 4.75 inch round faceplate (logo only)     |
| <b>10RD900</b>    | 900 MHz receiver module   |
| <b>10TD900TR</b>  | 900 MHz retrofit transmitter  |
| <b>20.2007</b>    | MS21 isolation module and PCBA harness  |



## MS31

MICROWAVE, TOUCHLESS ACTUATOR WITH  
ADJUSTABLE RANGE AND RELAY HOLD TIME

### Adjustable Detection Zone


Detection zone from 4 to 24 inches (timed or toggle)

### Adjustable LED Setting

DIP switch position determines if LED illuminates when in detection or when not in detection

### Silent Activation

Silent activation for hospitals and other noise-sensitive environments

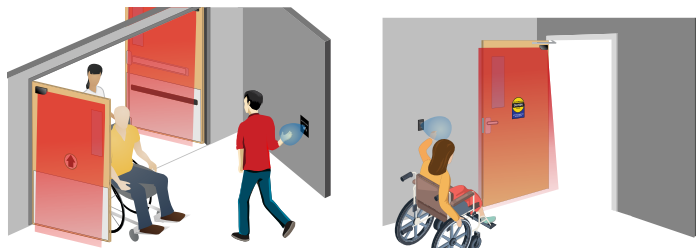

## TECHNICAL SPECIFICATIONS

|                          |   |
|--------------------------|---|
| <b>Technology</b>        | Microwave Doppler radar                                     |
| Radiated Frequency       | 24.125 GHz  |
| Radiated Power Density   | < 5 mW / cm <sup>2</sup>                                    |
| <b>Detection Mode</b>    | Motion (bidirectional)                                      |
| <b>Detection Range</b>   | 4 – 24" (adjustable)  |
| <b>Output</b>            | Relay with switch-over contact (voltage-free)               |
| Max. Contact Voltage     | 60 VDC / 125 VAC  |
| Max. Contact Current     | 1 A (resistive)   |
| Max. Switching Power     | 30 W (DC) / 60 VA (AC)                                      |
| <b>Output Hold Time</b>  | 0.5 – 30 s  |
| <b>Supply Frequency</b>  | 50 – 60 Hz  |
| <b>Supply Voltage</b>    | 12 – 24 VAC ±10%, 12 – 24 VDC +30% / -10%                   |
| <b>Power Consumption</b> | < 1.5 W   |
| <b>Weight</b>            | 0.34 lbs  |
| <b>Materials</b>         | PC, PE  |
| <b>Temperature Range</b> | -4 – 131 °F (-20 – 55 °C)                                   |
| <b>IP Rating</b>         | IP54  |
| <b>Dimensions</b>        |   |
| Single Gang              | 4 ½" (H) × 2 ¾" (W) × ¼" (T)                                |
| Jamb Plate               | 4 ½" (H) × 1 ¾" (W) × ¼" (T)                                |
| Double Gang              | 4 ½" (H) × 4 ½" (W) × ¼" (T)                                |
| Round Plate              | 6" (D) × ¼" (T)   |
| <b>Certification</b>     | EMC: 2004 / 108 / EC<br>FCC: G9B-210161<br>IC: 4680A-210161 |




### Durable Design

IP54-rated enclosure for protection against outdoor weather and daily cleaning

### Various Faceplates Available

Available in black, gray, and white faceplate; options include jamb style, single gang, double gang, and 6 inch round

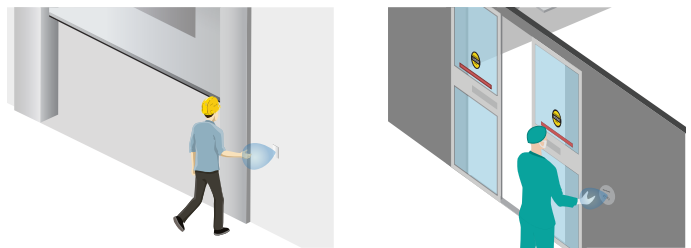

## PRODUCT SERIES


|                    |   |
|--------------------|---|
| <b>10MS31U-B</b>   | MAGIC SWITCH MS31 kit with microwave cell, single gang and double gang faceplates (text and logo, black)      |
| <b>10MS31U-G</b>   | MAGIC SWITCH MS31 kit with microwave cell, single gang and double gang faceplates (text and logo, gray)       |
| <b>10MS31U-W</b>   | MAGIC SWITCH MS31 kit with microwave cell, single gang and double gang faceplates (text and logo, white)      |
| <b>10MS31J-B</b>   | MAGIC SWITCH MS31 kit with microwave cell, jamb faceplate (text and logo, black)                              |
| <b>10MS31J-G</b>   | MAGIC SWITCH MS31 kit with microwave cell, jamb faceplate (text and logo, gray)                               |
| <b>10MS31J-W</b>   | MAGIC SWITCH MS31 kit with microwave cell, jamb faceplate (text and logo, white)                              |
| <b>10MS31R-B</b>   | MAGIC SWITCH MS31 kit with microwave cell, 6 inch round faceplate (text and logo, black)                      |
| <b>10MS31R-G</b>   | MAGIC SWITCH MS31 kit with microwave cell, 6 inch round faceplate (text and logo, gray)                       |
| <b>10MS31R-W</b>   | MAGIC SWITCH MS31 kit with microwave cell, 6 inch round faceplate (text and logo, white)                      |
| <b>10RD900</b>     | 900 MHz receiver module   |
| <b>10TD900TR</b>   | 900 MHz retrofit transmitter  |
| <b>MS31 CUSTOM</b> | MAGIC SWITCH MS31 kit with microwave cell and choice of accessibility logo or plain in any size/shape options |

**See next page for optional faceplate styles...**



# MS31

MICROWAVE, TOUCHLESS ACTUATOR WITH ADJUSTABLE RANGE AND RELAY HOLD TIME

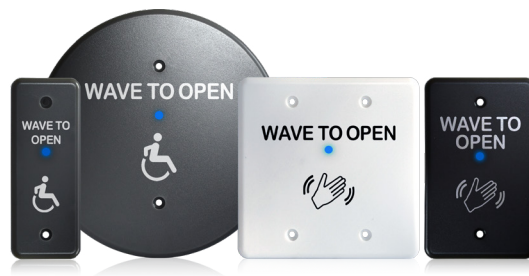

## PRODUCT SERIES

|                |  |                |  |
|----------------|--|----------------|--|
| <b>70.5869</b> | MAGIC SWITCH MS31 single-gang faceplate (plain, black)                       | <b>70.5844</b> | MAGIC SWITCH MS31 double-gang faceplate (text and hand logo, gray)           |
| <b>70.5833</b> | MAGIC SWITCH MS31 single-gang faceplate (text and hand logo, black)          | <b>70.5845</b> | MAGIC SWITCH MS31 double-gang faceplate (text and accessibility logo, gray)  |
| <b>70.5834</b> | MAGIC SWITCH MS31 single-gang faceplate (text and accessibility logo, black) | <b>70.5851</b> | MAGIC SWITCH MS31 6" round faceplate (plain, gray)                           |
| <b>70.5872</b> | MAGIC SWITCH MS31 jamb faceplate (plain, black)                              | <b>70.5852</b> | MAGIC SWITCH MS31 6" round faceplate (text and hand logo, gray)              |
| <b>70.5825</b> | MAGIC SWITCH MS31 jamb faceplate (text and hand logo, black)                 | <b>70.5853</b> | MAGIC SWITCH MS31 6" round faceplate (text and accessibility logo, gray)     |
| <b>70.5826</b> | MAGIC SWITCH MS31 jamb faceplate (text and accessibility logo, black)        | <b>70.5838</b> | MAGIC SWITCH MS31 single-gang faceplate (plain, white)                       |
| <b>70.5887</b> | MAGIC SWITCH MS31 double-gang faceplate (plain, black)                       | <b>70.5839</b> | MAGIC SWITCH MS31 single-gang faceplate (text and hand logo, white)          |
| <b>70.5841</b> | MAGIC SWITCH MS31 double-gang faceplate (text and hand logo, black)          | <b>70.5840</b> | MAGIC SWITCH MS31 single-gang faceplate (text and accessibility logo, white) |
| <b>70.5842</b> | MAGIC SWITCH MS31 double-gang faceplate (text and accessibility logo, black) | <b>70.5830</b> | MAGIC SWITCH MS31 jamb faceplate (plain, white)                              |
| <b>70.5871</b> | MAGIC SWITCH MS31 6" round faceplate (plain, black)                          | <b>70.5831</b> | MAGIC SWITCH MS31 jamb faceplate (text and hand logo, white)                 |
| <b>70.5849</b> | MAGIC SWITCH MS31 6" round faceplate (text and hand logo, black)             | <b>70.5832</b> | MAGIC SWITCH MS31 jamb faceplate (text and accessibility logo, white)        |
| <b>70.5850</b> | MAGIC SWITCH MS31 6" round faceplate (text and accessibility logo, black)    | <b>70.5846</b> | MAGIC SWITCH MS31 double-gang faceplate (plain, white)                       |
| <b>70.5835</b> | MAGIC SWITCH MS31 single-gang faceplate (plain, gray)                        | <b>70.5847</b> | MAGIC SWITCH MS31 double-gang faceplate (text and hand logo, white)          |
| <b>70.5836</b> | MAGIC SWITCH MS31 single-gang faceplate (text and hand logo, gray)           | <b>70.5848</b> | MAGIC SWITCH MS31 double-gang faceplate (text and accessibility logo, white) |
| <b>70.5837</b> | MAGIC SWITCH MS31 single-gang faceplate (text and accessibility logo, gray)  | <b>70.5854</b> | MAGIC SWITCH MS31 6" round faceplate (plain, white)                          |
| <b>70.5827</b> | MAGIC SWITCH MS31 jamb faceplate (plain, gray)                               | <b>70.5855</b> | MAGIC SWITCH MS31 6" round faceplate (text and hand logo, white)             |
| <b>70.5828</b> | MAGIC SWITCH MS31 jamb faceplate (text and hand logo, gray)                  | <b>70.5856</b> | MAGIC SWITCH MS31 6" round faceplate (text and accessibility logo, white)    |
| <b>70.5829</b> | MAGIC SWITCH MS31 jamb faceplate (text and accessibility logo, gray)         |                |  |
| <b>70.5843</b> | MAGIC SWITCH MS31 double-gang faceplate (plain, gray)                        |                |  |



# MS41

STAINLESS STEEL, TOUCHLESS ACTUATOR WITH ADJUSTABLE RANGE AND RELAY HOLD TIME

## Durable Faceplate


Stainless steel faceplate increases durability and protection from daily cleaning

## Ideal For Harsh Environments

IP55-rated enclosure capable of use in industrial and extreme wash-down environments

## High Visibility


Animated- or static-illuminated ring allows for high-visibility in low light areas

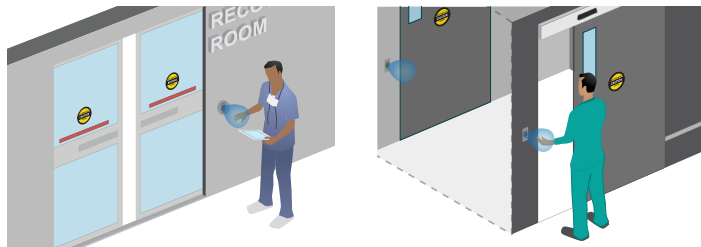

## TECHNICAL SPECIFICATIONS

|                          |   |
|--------------------------|---|
| <b>Technology</b>        | Microwave Doppler radar                                     |
| Radiated Frequency       | 24.125 GHz  |
| Radiated Power Density   | < 5 mW/cm <sup>2</sup>                                      |
| <b>Detection Mode</b>    | Motion (bidirectional)                                      |
| <b>Detection Range</b>   | 4 – 24" (adjustable)  |
| <b>Output</b>            | Relay with switch-over contact (voltage-free)               |
| Max. Contact Voltage     | 60 VDC / 125 VAC  |
| Max. Contact Current     | 1A (resistive)  |
| Max. Switching Power     | 30 W (DC) / 60 VA (AC)                                      |
| <b>Output Hold Time</b>  | 0.5 – 30 s  |
| <b>Supply Frequency</b>  | 50 – 60 Hz  |
| <b>Supply Voltage</b>    | 12 – 24 VAC ±10%<br>12 – 24 VDC +30% / -10%                 |
| <b>Power Consumption</b> | < 1.5 W   |
| <b>Wire Gauge</b>        | 26 – 22 AWG   |
| <b>Weight</b>            | 0.34 lbs  |
| <b>Material</b>          | Stainless steel   |
| <b>Temperature Range</b> | -4 – 131 °F   |
| <b>IP Rating*</b>        | IP55<br>Apply silicone to achieve IP65                      |
| <b>Dimensions</b>        |   |
| Single Gang              | 4 ½" (H) × 2 ¾" (W) × ⅝" (T)                                |
| Double Gang              | 4 ½" (H) × 4 ½" (W) × ⅝" (T)                                |
| Round                    | 6" (D) × ⅝" (T)   |
| Cube                     | 2 ⅛" (H) × 1 ⅜" (W) × 1 ⅛" (T)                              |
| <b>Certification</b>     | EMC: 2004 / 108 / EC<br>FCC: G9B-210161<br>IC: 4680A-210161 |

\* See Users Guide.

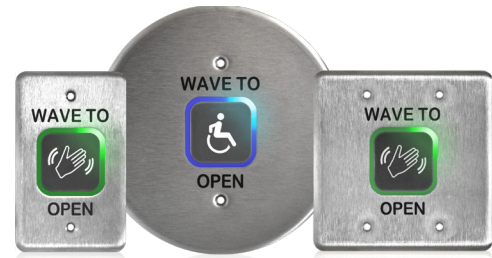

## Adjustable Detection Zone


Adjustable sensing zone from 4 to 24 inches (timed or toggle)

## Activation Alerts

Adjustable, audible alert setting, including silent-mode required for hospitals and other noise-sensitive environments

## Adjustable Hold Time

Configurable output hold time of ½ to 30 seconds allowing unique, user-defined device placement



## PRODUCT SERIES

|                  |  |
|------------------|--|
| <b>10MS41-S</b>  | MAGIC SWITCH MS41 kit with microwave cell and single-gang, stainless steel faceplate (text and hand logo)          |
| <b>10MS41-SA</b> | MAGIC SWITCH MS41 kit with microwave cell and single-gang, stainless steel faceplate (text and accessibility logo) |
| <b>10MS41-SP</b> | MAGIC SWITCH MS41 kit with microwave cell and single-gang, stainless steel faceplate (plain)                       |
| <b>10MS41-D</b>  | MAGIC SWITCH MS41 kit with microwave cell and double-gang, stainless steel faceplate (text and hand logo)          |
| <b>10MS41-DA</b> | MAGIC SWITCH MS41 kit with microwave cell and double-gang, stainless steel faceplate (text and accessibility logo) |
| <b>10MS41-DP</b> | MAGIC SWITCH MS41 kit with microwave cell and double-gang, stainless steel faceplate (plain)                       |
| <b>10MS41-R</b>  | MAGIC SWITCH MS41 kit with microwave cell and 6" round, stainless steel faceplate (text and hand logo)             |
| <b>10MS41-RA</b> | MAGIC SWITCH MS41 kit with microwave cell and 6" round, stainless steel faceplate (text and accessibility logo)    |
| <b>10MS41-RP</b> | MAGIC SWITCH MS41 kit with microwave cell and 6" round, stainless steel faceplate (plain)                          |
| <b>10TD900TR</b> | 900 MHz retrofit transmitter   |

MS41 Single, Double, and Round adapter bracket 70.5236 is included in the box. Adapter bracket can be used to replace a mud ring whose opening measures less than 2".

# ACCESS CONTROL PUSH BUTTON

ILLUMINATED, REQUEST-TO-EXIT BUTTON




## Easier Light Bulb Replacement

Easily replaced 12 to 24 VAC/VDC light bulb, reducing whole-product replacement

## Durable Faceplate

Stainless steel faceplate

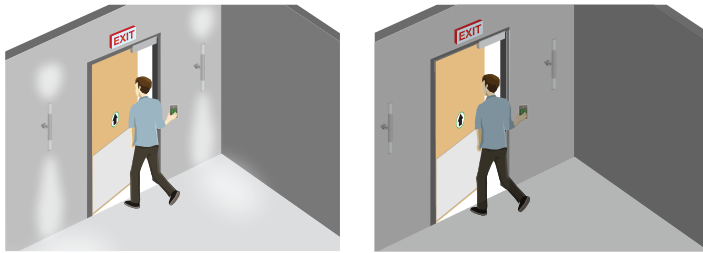

## TECHNICAL SPECIFICATIONS

### Switch

Voltage Max. 125 / 250 VAC

Current Max. 10 A

Power Max. 373 W

Electrical Configuration SPDT

### Bulb

Input Voltage 28 VDC (14 VDC, optional)

Current 16 mA ±10%, 12 V

## Secure

Vandal- and tamper-resistant design

## Reliable

Tested to perform more than one million operations

## PRODUCT SERIES

**10ACPBS1** Single-gang push button, illuminated, "Push To Exit"

## MOUNTING OPTIONS

**10BOX24SGSM** Standard single-gang, surface-mount box (2 ¾" × 4 ½")

# CABINET LOCK

80 LB ELECTROMAGNETIC LOCK



## TECHNICAL SPECIFICATIONS

|                           |                                      |
|---------------------------|--------------------------------------|
| <b>Door Configuration</b> | Single / Cabinet, surface mount      |
| <b>Holding Force</b>      | 80 lbs                               |
| <b>Input Voltage</b>      | 12 or 24 VDC                         |
| <b>Current Draw</b>       | 100 mA at 12 VDC<br>50 mA at 24 VDC  |
| <b>Dimensions</b>         | 2 3/4" (W) x 1 1/50" (H) x 7/10" (D) |
| <b>Magnet Weight</b>      | 0.44 lbs                             |
| <b>Materials</b>          |                                      |
| Lock Housing              | Aluminum                             |
| Armature Plate            | Zinc-plated steel                    |

## PRODUCT SERIES

|                       |   |
|-----------------------|---|
| <b>10MAGLIFELOCK9</b> | Cabinet lock - single, 80 lb, 12 / 24 VDC |
|-----------------------|---|



# DELAYED-EGRESS MAGLOCK KIT

UL LISTED, ALL-IN-ONE KIT WITH MAGLOCK, SOUNDER, AND KEYSWITCH



## Door-Synchronizing Feature

Double doors (2 single doors) can be synchronized

## Programmable Egress Time

Authorized egress time programmable zero to 15 seconds

## Selectable Alarm

Selectable, 30-second, door prop alarm

## Customizable LED Features

LED color and flashes can be customized

## TECHNICAL SPECIFICATIONS

|   |   |
|---|---|
| <b>Housing Dimensions</b>               | 10 53/64" (W) × 2 7/8" (H) × 2 1/8" (D)                     |
| <b>Armature Dimensions</b>              | 7 7/16" (W) × 2 3/8" (H) × 5/8" (D)                         |
| <b>Voltage / Tolerance</b>              | 12 – 24 VDC; ±10%   |
| <b>Max. Power / Current Draw</b>        |   |
| Maglock and Sounder                     | 0.49 A / 12 VDC<br>0.24 A / 24 VDC                          |
| Low Voltage Supply<br>Detection / Alarm | < 8 V   |
| <b>Holding Force</b>                    | Up to 1200 lb   |
| <b>Mortise Cylinder</b>                 | 1 1/8" cylinder with straight cam required,<br>NOT INCLUDED |
|   | <i>Requires 10CYLINDERKA or 10CYLINDERKD</i>                |
| <b>Operating Temperature</b>            | 14 – 140 °F   |
| <b>Norm Conformity</b>                  | UL / CUR Listed FWAX<br>Special locking arrangements        |
| <b>Compliance Provisions</b>            | IBC, SBC, UBC, BOCA, or NBC of Canada,<br>NFPA 101          |

## Input Features

Monitored, fire-alarm input

## Triggering Options

Delayed-Egress MAGLOCK can be triggered with pressure on the door or with a REX input (or disabled completely)

## Standards Compliant

UL294 listed kit

## PRODUCT SERIES

|                     |   |
|---------------------|---|
| <b>10MAGDE1</b>     | All-in-one Delayed Egress MAGLOCK Kit for single, out-swinging doors<br>UL / ULC listed, LED status, 12 / 24 VDC<br><br>Kit includes:<br>(1) 1200 lb MAGLOCK<br>(1) resettable KEYSWITCH (mortise cylinder not included)<br>(1) external sounder<br>(1) alarm signage<br><br><b>UL Listed MAGLOCKS require a UL Listed power supply</b> |
| <b>10CYLINDERKA</b> | 1 1/8" mortise cylinder, Schlage C Keyway, keyed alike  |
| <b>10CYLINDERKD</b> | 1 1/8" mortise cylinder, Schlage C Keyway, keyed differently  |
| <b>10PS12-24</b>    | UL / ULC Listed power supply  |
| <b>10PS12-24D</b>   | UL / ULC Listed power supply with backup circuit (1.75 A) <i>battery NOT included</i>   |
| <b>50.0336</b>      | Signage for 10MAGDE1<br>"Push until alarm sounds door can be opened within 15 seconds"  |





# ELECTRIC STRIKES

UL LISTED ELECTRIC STRIKES FOR US AND CANADA

## Modular Faceplate Options


Three modular faceplates for the most common door types: hollow metal, aluminum, and wood

## Standards Compliant

UL294 and UL1034 listed Universal Cylindrical and Rim Exit strikes

## Configurable

The non-handed, fully reversible design is field selectable to 12 or 24 VDC and field reversible with a fail-safe or fail-secure mode

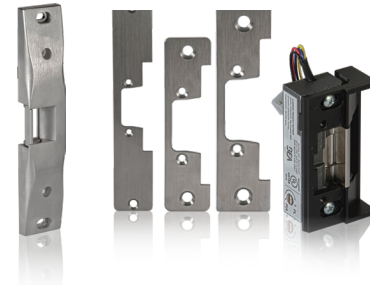

## Durable

UL tested to 250,000 cycles, factory-tested to 1,000,000 cycles

## UL Listed

Universal Cylindrical strikes are rated to 1000 lbs static and 70 lbs dynamic (50 lbs dynamic for CUV model)

Rim Exit strikes are rated to 1500 lbs static and 70 dynamic

## TECHNICAL SPECIFICATIONS

### 10STRIKERE

|                                  |                                  |                          |                            |
|----------------------------------|----------------------------------|--------------------------|----------------------------|
| <b>Mode*</b>                     | Fail-safe                        |                          |                            |
| <b>Voltage</b>                   | 12 VAC/VDC                       | 24 VAC/VDC               | 11 – 16 VAC                |
| <b>Duty**</b>                    | Intermittent, Continuous         | Intermittent, Continuous | Intermittent, Intermittent |
| <b>Amps***</b>                   | 0.30, 0.50                       | 0.64, 0.24               | 0.32 – 0.50                |
| <b>Sound</b>                     | Buzz, silent                     | Buzz, silent             | Buzz, buzz                 |
| <b>Static / Dynamic Strength</b> | 1500 lbs / 70 lbs                |                          |                            |
| <b>Endurance</b>                 | 250,000 cycles (UL tested)       |                          |                            |
| <b>Latch Throw</b>               | 3/4"                             |                          |                            |
| <b>Standards Compliance</b>      | UL294, UL1034, UL and ULC listed |                          |                            |

### 10STRIKECU

|                                  |                                  |            |               |
|----------------------------------|----------------------------------|------------|---------------|
| <b>Mode*</b>                     | Fail-safe, Fail-secure           |            |               |
| <b>Voltage</b>                   | 12 VDC                           | 24 VDC     | 12 – 24 VAC   |
| <b>Duty**</b>                    | Continuous                       | Continuous | Intermittent  |
| <b>Amps***</b>                   | 0.375                            | 0.190      | 0.280 – 0.565 |
| <b>Sound</b>                     | Silent                           | Silent     | Buzz          |
| <b>Static / Dynamic Strength</b> | 1000 lbs / 70 lbs                |            |               |
| <b>Endurance</b>                 | 250,000 cycles (UL tested)       |            |               |
| <b>Latch Throw</b>               | 1/2" or 5/8"                     |            |               |
| <b>Standards Compliance</b>      | UL294, UL1034, UL and ULC listed |            |               |

\* Fail Safe – Lock or locking device that remains unlocked on loss of power  
Fail Secure – Lock or locking device that remains locked on loss of power (also known as Non-Fail Safe (NFS))

\*\* Intermittent Duty – Energized less than 1 minute with duty ratio 1:5  
Continuous Duty – Energized 1 minute or more

\*\*\* Amp ratings are based on maximum current draw at 50 °F and include initial power-up current

## PRODUCT SERIES

|                   |  |
|-------------------|--|
| <b>10STRIKECU</b> | UL / ULC Listed, universal cylindrical, electric strike with three faceplates for aluminum, hollow metal, and wood frame installations |
| <b>10STRIKERE</b> | UL / ULC Listed, surface-mounted, electric strike for rim exit device  |



# ELECTRIC STRIKES

UL LISTED ELECTRIC STRIKES FOR THE US MARKET



## Modular Faceplate Options


Three modular faceplates for the most common door types: hollow metal, aluminum, and wood

## Standards Compliant

UL294 and UL1034 listed Universal Cylindrical and Rim Exit strikes

## Configurable

The non-handed, fully reversible design is field selectable to 12 or 24 VDC and field reversible with a fail-safe or fail-secure mode



## Durable

UL tested to 250,000 cycles, factory-tested to 1,000,000 cycles

## UL Listed

Universal Cylindrical strikes are rated to 1000 lbs static and 70 lbs dynamic (50 lbs dynamic for CUV model)

Rim Exit strikes are rated to 1500 lbs static and 70 dynamic

## TECHNICAL SPECIFICATIONS

### 10STRIKEREREV12 / 10STRIKEREV34

|                           |  |            |
|---------------------------|--|------------|
| Mode*                     | Fail-safe, Fail-secure   |            |
| Voltage                   | 12 VDC   | 24 VDC     |
| Duty**                    | Continuous   | Continuous |
| Amps ***                  | 0.540  | 0.270      |
| Sound                     | Silent   | Silent     |
| Static / Dynamic Strength | 1500 lbs / 70 lbs  |            |
| Endurance                 | 250,000 cycles (UL tested) / 1,000,000 cycles (factory tested) |            |
| Latch Throw               | 1/2" or 3/4"   |            |
| Standards Compliance      | UL294, UL1034, UL Listed                                       |            |

### 10STRIKECUV

|                           |  |            |
|---------------------------|--|------------|
| Mode*                     | Fail-safe, Fail-secure   |            |
| Voltage                   | 12 VDC   | 24 VDC     |
| Duty**                    | Continuous   | Continuous |
| Amps ***                  | 0.300  | 0.150      |
| Sound                     | Silent   | Silent     |
| Static / Dynamic Strength | 1000 lbs / 70 lbs  |            |
| Endurance                 | 250,000 cycles (UL tested) / 1,000,000 cycles (factory tested) |            |
| Latch Throw               | 9/16" (15 mm max)  |            |
| Standards Compliance      | UL294, UL1034, UL Listed                                       |            |

\* Fail Safe – Lock or locking device that remains unlocked on loss of power  
 Fail Secure – Lock or locking device that remains locked on loss of power (also known as Non-Fail Safe (NFS))

\*\* Intermittent Duty – Energized less than 1 minute with duty ratio 1:5  
 Continuous Duty – Energized 1 minute or more

\*\*\* Amp ratings are based on maximum current draw at 50 °F and include initial power-up current

## PRODUCT SERIES

|               |   |
|---------------|---|
| 10STRIKECUV   | UL Listed, universal cylindrical, electric strike |
| 10STRIKEREV12 | UL Listed, rim exit electric strike (1/2")        |
| 10STRIKEREV34 | UL Listed, rim exit electric strike (3/4")        |

# KEYSWITCHES


ACCESS-CONTROL SWITCH PLATE

## Vandal Resistant

Aluminum, wall plate with tamper-resistant screws

## Multiple Plate Sizes

Available in jamb and single-gang wall plates or double-gang combo-plate



## Keyswitch Override

Combo plate allows for independent operation of the push plate and keyswitch, or allows the keyswitch to activate or disable the push plate

## Selectable Power Consumption

Capable of switching 6A at 124 VAC or 3A at 250 VAC

## TECHNICAL SPECIFICATIONS

|  |  |
|--|--|
| <b>Technology</b>                      | Mechanical key access                        |
| <b>Faceplate Dimensions</b>            |  |
| Jamb                                   | 1 3/4" (W) x 4 3/4" (H) x 1/4" (D)           |
| Single                                 | 2 1/2" (W) x 4 3/4" (H) x 1/4" (D)           |
| Combo-plate                            | 4 1/2" (W) x 4 1/2" (H) x 1/4" (D)           |
| <b>Visual Style (combo plate only)</b> | Accessibility symbol and "Push To Open" text |
| <b>Material</b>                        | Aluminum                                     |
| <b>Switch Rating</b>                   | 6 A at 125 VAC or 3 A at 250 VAC             |
| <b>Mortise Cylinder*</b>               | 1 1/8" cylinder with straight cam required   |

\* NOT INCLUDED – Requires part 10CYLINDERKA or 10CYLINDERKD

## PRODUCT SERIES

|                        |   |
|------------------------|---|
| <b>10KEYSWITCHONF</b>  | Maintained keyswitch - single gang<br>3" x 4 3/4" x 1/2"<br><i>Mortise cylinder not included</i>                      |
| <b>10KEYSWITCHMOM</b>  | Momentary keyswitch - single gang<br>3" x 4 3/4" x 1/2"<br><i>Mortise cylinder not included</i>                       |
| <b>10JAMBSWITCHONF</b> | Maintained keyswitch - jamb<br>1 3/4" x 4 3/4" x 1/2"<br><i>Mortise cylinder not included</i>                         |
| <b>10JAMBSWITCHMOM</b> | Momentary keyswitch - jamb<br>1 3/4" x 4 3/4" x 1/2"<br><i>Mortise cylinder not included</i>                          |
| <b>10COMBOPLATE</b>    | Jamb push plate combined with maintained keyswitch on a double-gang faceplate<br><i>Mortise cylinder not included</i> |
| <b>10COMBOPLATEMOM</b> | Jamb push plate combined with momentary keyswitch on a double-gang faceplate<br><i>Mortise cylinder not included</i>  |
| <b>10CYLINDERKA</b>    | 1 1/8" mortise cylinder,<br>Schlage C Keyway, keyed alike   |
| <b>10CYLINDERKD</b>    | 1 1/8" mortise cylinder,<br>Schlage C Keyway, keyed differently   |
| <b>20.2021</b>         | ON / OFF switch for 10KEYSWITCHONF and 10JAMBSWITCHONF  |
| <b>20.2020</b>         | Momentary switch for 10KEYSWITCHMOM and 10JAMBSWITCHMOM   |

## MOUNTING OPTIONS

|                    |  |
|--------------------|--|
| <b>10BOXJAMBST</b> | Surface-mount, jamb box - hardwired only<br>(1 3/4" x 4 1/2" jamb) |
| <b>10BOX24SGSM</b> | Standard single-gang, surface-mount box (2 3/4" x 4 1/2")          |
| <b>10BOXDGSM</b>   | Surface-mount box, double gang                                     |



# PIEZO BUTTON

HEAVY DUTY, PIEZOELECTRIC PUSH BUTTON

## Adjustable Hold Time

1 to 40 seconds, user-adjustable output hold time

## Selectable Modes

Can be configured to fail-safe or fail-secure

## NO or NC

Can be wired normally open or normally closed




## Customizable Illumination

LED illumination can be customized to user preference

## Vandal Resistant

Vandal- and tamper-resistant design

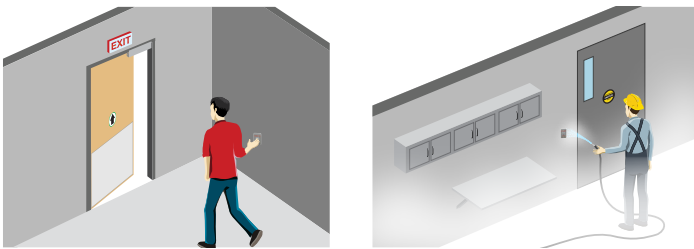

## TECHNICAL SPECIFICATIONS

|                             |   |
|-----------------------------|---|
| <b>Technology</b>           | Piezoelectric   |
| <b>Faceplate Dimensions</b> |   |
| Single Gang                 | 2 ¾" (W) x 4 ½" (H)   |
| <b>LED</b>                  | Illuminated red/green ring that signals activation (can also be disabled) |
| <b>Faceplate Material</b>   | Stainless steel   |
| <b>Hold Time Range</b>      | 1 – 40 s (adjustable)   |
| <b>Voltage Input</b>        | 12 – 24 VDC (auto-sensing)  |
| <b>Norm Conformity</b>      | IP65  |

## PRODUCT SERIES

|                    |   |
|--------------------|---|
| <b>10PIEZO241</b>  | Piezoelectric push button, single gang<br>"Push To Exit" text |
| <b>10BOX24SGSM</b> | Standard, single-gang, surface-mount box (2 ¾" x 4 ½")        |



# PNEUMATIC PUSH BUTTONS

ACCESS CONTROL PUSH BUTTON WITH MECHANICAL-PNEUMATIC HOLDTIME

## Customizable

Adjustable time delay of 2 to 60 seconds

## Standards Compliant

Listed UL508 / CSA C22.2 No 14-10 with MET LABS, File #E113051

## Various Styles

Buttons available in 1 5/8 inch (standard) or 2 inch (large) sizes



## Meet Your Application Needs

Available in a variety of combinations of color, text, and logo (upon request)

## Tested to Last

Tested to perform greater than 1 million operations



## TECHNICAL SPECIFICATIONS

|                              |   |
|------------------------------|---|
| <b>Technology</b>            | Pneumatic   |
| <b>Faceplate Dimensions</b>  |   |
| Single                       | 2 3/4" (W) x 4 1/2" (H)   |
| Jamb                         | 1 3/4" (W) x 4 1/2" (H)   |
| <b>Visual Style</b>          | Red button with "Push to Exit" text<br>Blue button with accessibility logo<br>Green button with "Push to Exit" text |
| <b>Materials</b>             |   |
| Faceplate                    | Stainless steel   |
| Button                       | Colored, anodized aluminum  |
| <b>Switch Rating</b>         | 5 A at 125 VAC  |
| <b>Time Range</b>            | 2 – 60 s ±15%, adjustable   |
| <b>Repeat Accuracy</b>       | ±5% at 72 °F  |
| <b>Operating Temperature</b> | -15 – 120 °F<br><i>Rated for indoor use only</i>  |
| <b>Timer Life</b>            | 1,000,000 operations  |

## PRODUCT SERIES

|                   |   |
|-------------------|---|
| <b>10ACPBDA1</b>  | 2" jamb, red button, text only              |
| <b>10ACPBDA2</b>  | 2" single-gang, red button, text only       |
| <b>10ACPBDA3</b>  | 1 5/8" jamb, red button, text only          |
| <b>10ACPBDA4</b>  | 1 5/8" single-gang, red button, text only   |
| <b>10ACPBDA5</b>  | 2" jamb, blue button, logo only             |
| <b>10ACPBDA6</b>  | 2" single-gang, blue button, logo only      |
| <b>10ACPBDA7</b>  | 1 5/8" jamb, blue button, logo only         |
| <b>10ACPBDA8</b>  | 1 5/8" single-gang, blue button, logo only  |
| <b>10ACPBDA9</b>  | 2" jamb, green button, text only            |
| <b>10ACPBDA10</b> | 2" single-gang, green button, text only     |
| <b>10ACPBDA11</b> | 1 5/8" jamb, green button, text only        |
| <b>10ACPBDA12</b> | 1 5/8" single-gang, green button, text only |

## MOUNTING OPTIONS

|                    |  |
|--------------------|--|
| <b>10BOXJAMBST</b> | Surface-mount, jamb box - hardwired only<br>(1 3/4" x 4 1/2" jamb) |
| <b>10BOX24SGSM</b> | Standard single-gang, surface-mount box (2 3/4" x 4 1/2")          |



# UL LISTED GATELOCKS

WEATHER-RESISTANT, ELECTROMAGNETIC LOCK

## Multiple Mounting Options


Available in front or side mount with a 1200 lb holding force

## Easy-to-Mount

Front-mount model comes with a 3/4 inch male NPS threaded conduit fitting

## Lock Status Sensor

Built-in remote lock status sensor with an output relay

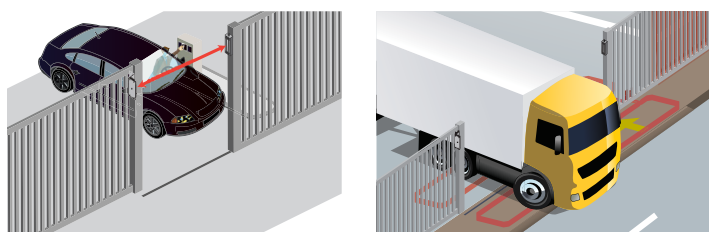


## TECHNICAL SPECIFICATIONS

### 10GL1200R

|   |  |
|---|--|
| <b>Door Configuration</b>               | Sliding gate, front mount                        |
| <b>Holding Force</b>                    | 1200 lb  |
| <b>Input Voltage</b>                    | 12 / 24 VDC (UL Listed power supply recommended) |
| <b>Current Draw</b>                     | 500 mA at 12 VDC<br>250 mA at 24 VDC             |
| <b>Relay Switch</b>                     | 250 mA at 12 VDC<br>125 mA at 24 VDC             |
| <b>Dimensions</b>                       | 8 3/4" (W) x 2 1/2" (H) x 1 5/8" (D)             |
| <b>Material</b>                         | Stainless steel                                  |
| <b>Sensor</b>                           | Lock status sensor with relay output             |
| <b>Cable Specifications</b>             | 24 AWG, 7-conductor cable, 3 1/2'                |
| <b>Norm Conformity</b>                  | UL and ULC<br>ANSI 156.10<br>NEMA 4 / IP65       |
| <b>Conduit Fitting (10GL1200R ONLY)</b> | 3/4" NPS conduit fitting<br>14 threads per inch  |

### 10GL1200SR

|                             |  |
|-----------------------------|--|
| <b>Door Configuration</b>   | Sliding door / gate, side mount                  |
| <b>Holding Force</b>        | 1200 lb  |
| <b>Input Voltage</b>        | 12 / 24 VDC (UL Listed power supply recommended) |
| <b>Current Draw</b>         | 500 mA at 12 VDC<br>250 mA at 24 VDC             |
| <b>Relay Switch</b>         | 250 mA at 12 VDC<br>125 mA at 24 VDC             |
| <b>Dimensions</b>           | 8 3/4" (W) x 2 1/2" (H) x 1 5/8" (D)             |
| <b>Material</b>             | Stainless steel                                  |
| <b>Sensor</b>               | Lock status sensor with relay output             |
| <b>Cable Specifications</b> | 24 AWG, 7-conductor cable, 3 1/2'                |
| <b>Norm Conformity</b>      | UL and ULC<br>ANSI 156.10<br>NEMA 4 / IP65       |

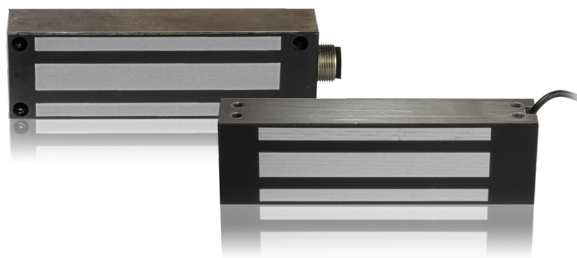

## Additional Protection

Built-in surge protection

## Withstands the Elements


Weather-resistant, stainless steel housing makes these locks suitable for outdoor applications

## PRODUCT SERIES

|                       |  |
|-----------------------|--|
| <b>10GL1200R</b>      | UL / ULC Listed, 12 / 24 VDC, front-mounted, 1200 lb                                     |
| <b>10GL1200SR</b>     | UL / ULC Listed, 12 / 24 VDC, side-mounted, 1200 lb                                      |
| <b>10LZBRGATE1200</b> | (1) "L" bracket<br>(1) "Z" bracket   |
| <b>10PS12-24</b>      | UL / ULC Listed power supply   |
| <b>10PS12-24D</b>     | UL / ULC Listed power supply with backup circuit (1.75 A)<br><i>battery NOT included</i> |

NEW SESSION

# MAKING SENSE OF AUTOMATION

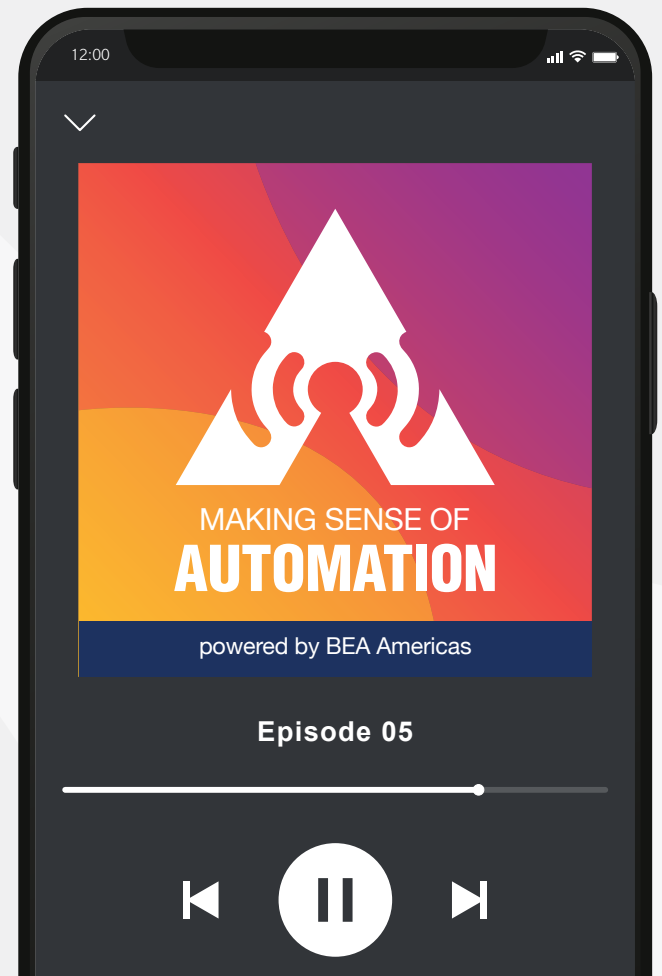

Live discussions addressing challenges and resources in the automatic door industry. Join BEA's field experts as they interview guests and dive deep into the world of automation.

Our live webinar offers attendees insider access and an opportunity to address questions. From retail, healthcare and industrial environments, Making Sense of Automation gives a refreshing take on the automatic door industry. Register below for upcoming sessions or join us on via our company LinkedIn page.



[us.beasensors.com/en/news/making-sense-of-automation/](https://us.beasensors.com/en/news/making-sense-of-automation/)



# TECH TIME LIVE

Tech Time Live is a virtual training series given by our technical services team. Join our techs as they provide detailed product demonstrations, step by step walkthroughs and answer your questions about BEA products and applications.

Go live with BEA technicians as they offer comprehensive training on key BEA products and accessories. From installation and wiring to troubleshooting in the field, Tech Time Live is an excellent resource for technicians looking for live tutorials.



[us.beasensors.com/en/training/tech-time-live/](https://us.beasensors.com/en/training/tech-time-live/)





# 1200LB MAGLOCKS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY AND LOCK (BOND) STATUS SENSOR

## User-Configurable


Adjustable zero to 90 second relock time delay

## Enhanced Access Control / Monitoring

Lock (bond) status sensor with visible LED offers either normally open or normally closed output configurations

## UL 294 Listed\*

Listed for access control systems and must be used with a UL Listed power supply

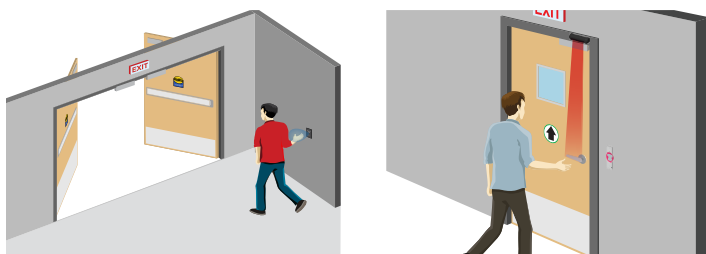

## TECHNICAL SPECIFICATIONS

### 10MAGLOCK1UL

|                          |   |
|--------------------------|---|
| Lock                     | Single  |
| Input Voltage            | 12 or 24 VDC  |
| Relay Rating             | 1.0 A at 24 VDC resistive   |
| Relay Power Factor       | 1   |
| Reed Switch Rating       | Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load) |
| Reed Switch Power Factor | 1   |
| Power Consumption        | 500 mA at 12 VDC<br>250 mA at 24 VDC  |
| Dimensions               | 10 15/32" (W) x 2 7/8" (H) x 1 37/64" (D)   |
| Certification            | UL294 (up to 1,000 lb static strength)<br>File #BP10577   |
| Operating Temperature    | 32 – 120 °F   |
| Operating Humidity       | 0 – 85%   |

### 10MAGLOCK5UL

|                          |   |
|--------------------------|---|
| Lock                     | Double  |
| Input Voltage            | 12 or 24 VDC  |
| Relay Rating             | 1.0 A at 24 VDC resistive   |
| Relay Power Factor       | 1   |
| Reed Switch Rating       | Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load) |
| Reed Switch Power Factor | 1   |
| Power Consumption        | 500 mA at 12 VDC<br>250 mA at 24 VDC each   |
| Dimensions               | 21" (W) x 2 7/8" (H) x 1 37/64" (D)   |
| Certification            | UL294 (up to 1,000 lb static strength)<br>File #BP10577   |
| Operating Temperature    | 32 – 120 °F   |
| Operating Humidity       | 0 – 85%   |



## Anti-Tampering

The security screw on the front face blocks access to the bottom of the electromagnetic lock preventing tampering or dismounting

## Convenient Packages Available

Available in access control packages with sensor, logic module, actuator, and MAGLOCK

\* This product is UL294-listed up to 1,000 lb static strength.

## PRODUCT SERIES

|                        |  |
|------------------------|--|
| <b>10MAGLOCK1UL</b>    | Single, 1200 lb, UL / ULC listed<br>LED status<br>0 – 90 second hold open timer (relock)<br>(1) bond status relay<br>12 / 24 VDC |
| <b>10MAGLOCK5UL</b>    | Double, 1200 lb, UL / ULC listed<br>LED status<br>0 – 90 second hold open timer (relock)<br>(1) bond status relay<br>12 / 24 VDC |
| <b>10LZBRMAG1UL</b>    | (1) "L" bracket, (1) "Z" bracket - <i>for single 1200 lb MAGLOCKS</i>  |
| <b>MAG5LZUL</b>        | (2) "L" brackets, (2) "Z" brackets - <i>for single 1200 lb MAGLOCKS</i>  |
| <b>10UBRACKETUL</b>    | Bracket kit for mounting a MAGLOCK to a glass door up to 1/2" thick  |
| <b>10FILLER12UL</b>    | 1/2" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>                      |
| <b>10FILLER34UL</b>    | 3/4" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>                      |
| <b>10FILLER58UL</b>    | 5/8" x 3/4" horizontal filler plate used to fill or extend door stops - <i>for single locks only</i>                             |
| <b>10RIMHOUSING1UL</b> | Provides a more aesthetically pleasing look over standard armature plates - <i>for single 1200 lb MAGLOCKS</i>                   |
| <b>10SPACER1UL</b>     | Vertical "spacer bracket" used when the stop requires the MAGLOCK to be lowered - <i>for single 1200 lb MAGLOCKS</i>             |
| <b>10PS12-24</b>       | UL / ULC Listed power supply   |
| <b>10PS12-24D</b>      | UL / ULC Listed power supply with backup circuit (1.75 A) - <i>battery NOT included</i>  |
| <b>50.0334</b>         | Screw pack for 10MAGLOCK1UL  |

**See page 88 for Access Control packages**



# 1200LB MAGLOCKS WITH DS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY, LOCK (BOND) STATUS SENSOR, AND DOOR STATUS SENSOR

## User-Configurable


Adjustable zero to 90 second relock time delay

## Enhanced Access Control / Monitoring

Lock (bond) status sensor with visible LED offers either normally open or normally closed output configurations

## UL 294 Listed\*

Listed for access control systems and must be used with a UL Listed power supply

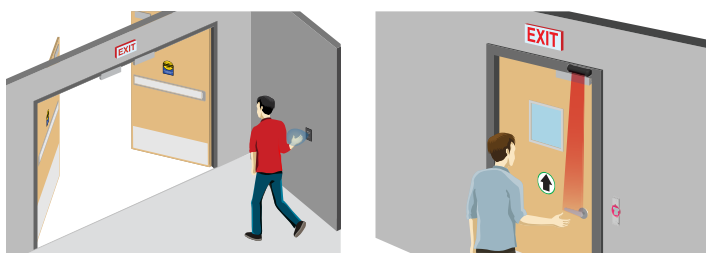

## TECHNICAL SPECIFICATIONS

| 10MAGLOCK1ULDS           |   |
|--------------------------|---|
| Lock                     | Single  |
| Input Voltage            | 12 or 24 VDC  |
| Relay Rating             | 1.0 A at 24 VDC resistive   |
| Relay Power Factor       | 1   |
| Reed Switch Rating       | Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load) |
| Reed Switch Power Factor | 1   |
| Power Consumption        | 500 mA at 12 VDC<br>250 mA at 24 VDC  |
| Dimensions               | 10 15/32" (W) x 2 7/8" (H) x 1 37/64" (D)   |
| Certification            | UL294 (up to 1,000 lb static strength)<br>File #BP10577   |
| Operating Temperature    | 32 – 120 °F   |
| Operating Humidity       | 0 – 85%   |
| 10MAGLOCK5ULDS           |   |
| Lock                     | Double  |
| Input Voltage            | 12 or 24 VDC  |
| Relay Rating             | 1.0 A at 24 VDC resistive   |
| Relay Power Factor       | 1   |
| Reed Switch Rating       | Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load) |
| Reed Switch Power Factor | 1   |
| Power Consumption        | 500 mA at 12 VDC<br>250 mA at 24 VDC each   |
| Dimensions               | 21" (W) x 2 7/8" (H) x 1 37/64" (D)   |
| Certification            | UL294 (up to 1,000 lb static strength)<br>File #BP10577   |
| Operating Temperature    | 32 – 120 °F   |
| Operating Humidity       | 0 – 85%   |



## Anti-Tampering

The security screw on the front face blocks access to the bottom of the electromagnetic lock preventing tampering or dismounting

## Convenient Packages Available

Available in access control packages with sensor, logic module, actuator, and MAGLOCK

\* This product is UL294-listed up to 1,000 lb static strength.

## PRODUCT SERIES

|                        |   |
|------------------------|---|
| <b>10MAGLOCK1ULDS</b>  | Single, 1200 lb, UL / ULC listed<br>LED status<br>0 – 90 second hold open timer (relock)<br>(1) door status sensor<br>12 / 24 VDC |
| <b>10MAGLOCK5ULDS</b>  | Double, 1200 lb, UL / ULC listed<br>LED status<br>0 – 90 second hold open timer (relock)<br>(1) door status sensor<br>12 / 24 VDC |
| <b>10LZBRMAG1UL</b>    | (1) "L" bracket, (1) "Z" bracket - <i>for single 1200 lb MAGLOCKS</i>   |
| <b>MAG5LZUL</b>        | (2) "L" brackets, (2) "Z" brackets - <i>for single 1200 lb MAGLOCKS</i>   |
| <b>10UBRACKETUL</b>    | Bracket kit for mounting a MAGLOCK to a glass door up to 1/2" thick   |
| <b>10FILLER12UL</b>    | 1/2" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>                       |
| <b>10FILLER34UL</b>    | 3/4" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>                       |
| <b>10FILLER58UL</b>    | 5/8" x 3/4" horizontal filler plate used to fill or extend door stops   |
| <b>10RIMHOUSING1UL</b> | Provides a more aesthetically pleasing look over standard armature plates - <i>for single 1200 lb MAGLOCKS</i>                    |
| <b>10SPACER1UL</b>     | Vertical "spacer bracket" used when the stop requires the MAGLOCK to be lowered - <i>for single 1200 lb MAGLOCKS</i>              |
| <b>10PS12-24</b>       | UL / ULC Listed power supply  |
| <b>10PS12-24D</b>      | UL / ULC Listed power supply with backup circuit (1.75 A) - <i>battery NOT included</i>   |
| <b>50.0340</b>         | Cover plate ONLY with DS switch for 10MAGLOCK1ULDS  |
| <b>50.0342</b>         | Cover plate ONLY with DS switch for 10MAGLOCK5ULDS  |
| <b>50.0334</b>         | Screw pack for 10MAGLOCK1UL   |

See page 88 for Access Control packages



# 600LB MAGLOCKS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY AND LOCK (BOND) STATUS SENSOR

## Customizable



Adjustable zero to 90 second relock time delay

## Enhanced Reliability

Lock status sensor with visible LED offers either normally open or normally closed output configurations

## UL Listed

Input voltage of 12 / 24 VDC, must be used with UL Listed power supply

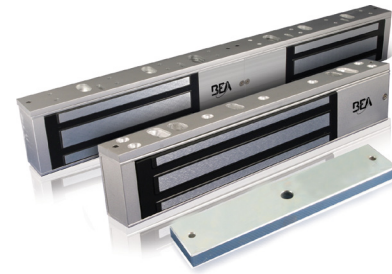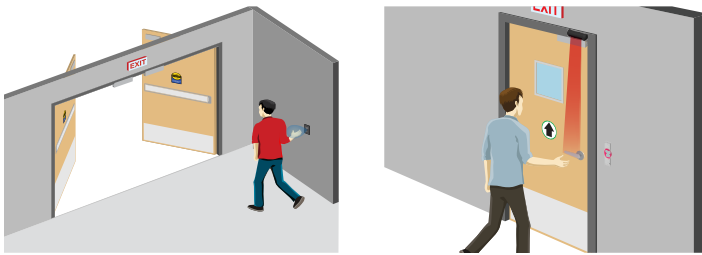

## Mounting Accessories

Variety of mounting hardware available

## Convenient Packages Available

Available in access control packages with request-to-exit sensor, logic module, actuator, power supply, and MAGLOCK

## TECHNICAL SPECIFICATIONS

### 10MAGLOCK3UL

|                       |  |
|-----------------------|--|
| Lock                  | Single                                       |
| Input Voltage         | 12 or 24 VDC                                 |
| Relay Rating          | 1.0 A at 24 VDC resistive                    |
| Reed Switch Rating    | SPDT 0.5 amp at 30 VAC / VDC resistive       |
| Power Consumption     | 505 mA × 2 at 12 VDC<br>260 mA × 2 at 24 VDC |
| Dimensions            | 9 27/32" (W) × 1 21/32" (H) × 1" (D)         |
| Certification         | UL1034                                       |
| Operating Temperature | 14 – 131 °F                                  |
| Operating Humidity    | 0 – 95%                                      |

### 10MAGLOCK6UL

|                       |  |
|-----------------------|--|
| Lock                  | Double                                       |
| Input Voltage         | 12 or 24 VDC                                 |
| Relay Rating          | 1.0 A at 24 VDC resistive                    |
| Reed Switch Rating    | SPDT 0.5 amp at 30 VAC / VDC resistive       |
| Power Consumption     | 505 mA × 2 at 12 VDC<br>260 mA × 2 at 24 VDC |
| Dimensions            | 19 3/4" (W) × 1 21/32" (H) × 1" (D)          |
| Certification         | UL1034                                       |
| Operating Temperature | 14 – 131 °F                                  |
| Operating Humidity    | 0 – 95%                                      |

## PRODUCT SERIES

|                        |   |
|------------------------|---|
| <b>10MAGLOCK3UL</b>    | Single, 600 lb, UL / ULC listed<br>LED status<br>0 – 90 second hold open timer (relock)<br>(1) bond status relay<br>12 / 24 VDC |
| <b>10MAGLOCK6UL</b>    | Double, 600 lb, UL / ULC listed<br>LED status<br>0 – 90 second hold open timer (relock)<br>(1) bond status relay<br>12 / 24 VDC |
| <b>10LZBRMAG3UL</b>    | (1) "L" bracket, (1) "Z" bracket - <i>for single 600 lb MAGLOCKS</i>  |
| <b>MAG6LZUL</b>        | (2) "L" brackets, (2) "Z" brackets - <i>for single 600 lb MAGLOCKS</i>  |
| <b>10UBRACKETUL</b>    | Bracket kit for mounting a MAGLOCK to a glass door up to 1/2" thick   |
| <b>10FILLER12UL</b>    | 1/2" × 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>                     |
| <b>10FILLER34UL</b>    | 3/4" × 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>                     |
| <b>10FILLER58UL</b>    | 5/8" × 3/4" horizontal filler plate used to fill or extend door stops - <i>for single locks only</i>                            |
| <b>10RIMHOUSING3UL</b> | Provides a more aesthetically pleasing look over standard armature plates - <i>for single 600 lb MAGLOCKS</i>                   |
| <b>10SPACER3UL</b>     | Vertical "spacer bracket" used when the stop requires the MAGLOCK to be lowered - <i>for single 600 lb MAGLOCKS</i>             |
| <b>10PS12-24</b>       | UL / ULC Listed power supply  |
| <b>10PS12-24D</b>      | UL / ULC Listed power supply with backup circuit (1.75 A) - <i>battery NOT included</i>   |
| <b>50.0335</b>         | Screw pack for 10MAGLOCK3UL   |

**See page 88 for Access Control packages**



# 600LB MAGLOCKS WITH DS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY, LOCK STATUS SENSOR, AND DOOR STATUS SENSOR

## Customizable


Adjustable zero to 90 second relock time delay

## Enhanced Reliability

Lock status sensor with visible LED offers either normally open or normally closed output configurations

## UL Listed

Input voltage of 12 / 24 VDC, must be used with UL Listed power supply

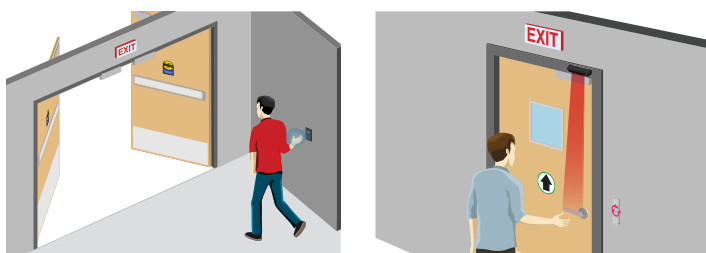

## Mounting Accessories

Variety of mounting hardware available

## Convenient Packages Available

Available in access control packages with sensor, logic module, actuator, and MAGLOCK

## TECHNICAL SPECIFICATIONS

### 10MAGLOCK3ULDS

|                          |   |
|--------------------------|---|
| Lock                     | Single  |
| Input Voltage            | 12 or 24 VDC  |
| Relay Rating             | 1.0 A at 24 VDC resistive   |
| Relay Power Factor       | 1   |
| Reed Switch Rating       | Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load) |
| Reed Switch Power Factor | 1   |
| Power Consumption        | 500 mA at 12 VDC<br>250 mA at 24 VDC  |
| Dimensions               | 10 1/2" (W) x 2 7/8" (H) x 1 1/2" (D)   |
| Certification            | UL1034  |
| Operating Temperature    | 14 – 131 °F   |
| Operating Humidity       | 0 – 95%   |

### 10MAGLOCK6ULDS

|                          |   |
|--------------------------|---|
| Lock                     | Double  |
| Input Voltage            | 12 or 24 VDC  |
| Relay Rating             | 1.0 A at 24 VDC resistive   |
| Relay Power Factor       | 1   |
| Reed Switch Rating       | Dry Contacts: 3W (switching contact 0.25 amps max, switching voltage 30VDC max; resistive load) |
| Reed Switch Power Factor | 1   |
| Power Consumption        | 505 mA x 2 at 12 VDC<br>260 mA x 2 at 24 VDC  |
| Dimensions               | 21" (W) x 2 7/8" (H) x 1 1/2" (D)   |
| Certification            | UL1034  |
| Operating Temperature    | 14 – 131 °F   |
| Operating Humidity       | 0 – 95%   |

## PRODUCT SERIES

|                        |  |
|------------------------|--|
| <b>10MAGLOCK3ULDS</b>  | Single, 600 lb, UL / ULC listed<br>LED status<br>0 – 90 second hold open timer (relock)<br>(1) door status sensor<br>12 / 24 VDC |
| <b>10MAGLOCK6ULDS</b>  | Double, 600 lb, UL / ULC listed<br>LED status<br>0 – 90 second hold open timer (relock)<br>(1) door status sensor<br>12 / 24 VDC |
| <b>10LZBRMAG3UL</b>    | (1) "L" bracket, (1) "Z" bracket - <i>for single 600 lb MAGLOCKS</i>   |
| <b>MAG6LZUL</b>        | (2) "L" brackets, (2) "Z" brackets - <i>for single 600 lb MAGLOCKS</i>   |
| <b>10UBRACKETUL</b>    | Bracket kit for mounting a MAGLOCK to a glass door up to 1/2" thick  |
| <b>10FILLER12UL</b>    | 1/2" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>                      |
| <b>10FILLER34UL</b>    | 3/4" x 3/4" horizontal, right filler plate used to fill or extend door stops - <i>for single locks only</i>                      |
| <b>10FILLER58UL</b>    | 5/8" x 3/4" horizontal filler plate used to fill or extend door stops  |
| <b>10RIMHOUSING3UL</b> | Provides a more aesthetically pleasing look over standard armature plates - <i>for single 600 lb MAGLOCKS</i>                    |
| <b>10SPACER3UL</b>     | Vertical "spacer bracket" used when the stop requires the MAGLOCK to be lowered - <i>for single 600 lb MAGLOCKS</i>              |
| <b>10PS12-24</b>       | UL / ULC Listed power supply   |
| <b>10PS12-24D</b>      | UL / ULC Listed power supply with backup circuit (1.75 A) - <i>battery NOT included</i>  |
| <b>50.0341</b>         | Cover plate ONLY with DS switch for 10MAGLOCK3ULDS   |
| <b>50.0343</b>         | Cover plate ONLY with DS switch for 10MAGLOCK6ULDS   |
| <b>50.0335</b>         | Screw pack for 10MAGLOCK3UL  |

See page 88 for Access Control packages



# UNIVERSAL KEYPAD FAMILY

ACCESS-CONTROL KEYPADS FOR INDOOR AND OUTDOOR USE



## Highly Flexible

Allows for up to 1100 user codes

## Ideal for Outdoor Environments

IP66 rating ensures the device will withstand the elements in harsh industrial and outdoor environments

## Tamper Alarm

Incorporates a tamper alarm feature as a standard option



## Multiple Relays

Two-zone feature provides 2 relays and 2 exit button outputs for two-zone applications

## Improved Visibility

Back-lit numbers allow for ease of use in dimly lit areas

## TECHNICAL SPECIFICATIONS

|                              |  |
|------------------------------|--|
| <b>Supply Voltage</b>        | 12 – 24 VAC/VDC<br><b>DO NOT EXCEED 30 VDC or 24 VAC</b> |
| <b>Standby Current</b>       | ≤ 30 mA  |
| <b>Working Current</b>       | ≤ 160 mA   |
| <b>Max User Codes</b>        | 1100   |
| Zone 1                       | 1000 users   |
| Zone 2                       | 100 users  |
| <b>Relock Time</b>           | 0 – 99 s   |
| <b>Output</b>                | 2 relays (free of potential change-over contact)         |
| Max. Contact Voltage         | 42 VAC/VDC   |
| Max. Contact Current         | 1 A (resistive)  |
| Max. Switching Power         | 30 W (VDC) / 48 VA (VAC)                                 |
| <b>Cable Length</b>          | 3'   |
| <b>Operating Temperature</b> | -22 – 158 °F   |
| <b>Operating Humidity</b>    | 0 – 95% (non-condensing)                                 |
| <b>IP Rating</b>             | IP66 (waterproof and dust proof)                         |
| <b>Dimensions</b>            |  |
| Single gang                  | 3" (W) × 4 7/10" (H) × 9/10" (D)                         |
| Slim-line                    | 1 7/10" (W) × 5 9/10" (H) × 19/20" (D)                   |
| <b>Certifications</b>        | CE, RoHS   |
| <b>Backlight</b>             | Blue keypad illumination                                 |

## PRODUCT SERIES

|                    |   |
|--------------------|---|
| <b>10KEYPADU</b>   | Universal keypad for indoor and outdoor use           |
| <b>10KEYPADUSL</b> | Universal, slimline keypad for indoor and outdoor use |



# LED SIGNAL COLUMN LIGHTS

UL LISTED, SINGLE-COLOR LIGHT



## Standards Compliant

UL Listed

## Ideal For Harsh Environments



IP67 rating for maximum performance in harsh environments

## Three Highly Visible Colors

Available LED colors include red, green, and yellow

## Selectable Voltage

18 to 30 VDC supply voltage

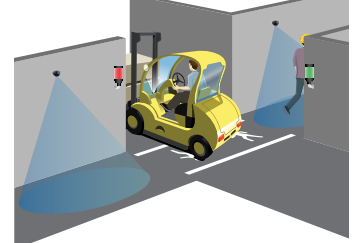

## TECHNICAL SPECIFICATIONS

|                                |  |
|--------------------------------|--|
| <b>Supply Voltage</b>          | 18 – 30 VDC  |
| <b>Indicator Response Time</b> |  |
| Off Response                   | 10 ms  |
| On Response                    | 10 ms  |
| <b>LED</b>                     | Red, green, yellow   |
| <b>Connector</b>               | 78"<br>4-wire integral cable   |
| <b>Operating Temperature</b>   | -40 – 122 °F<br>95% at 122 °F maximum relative humidity (non-condensing) |
| <b>Degree of Protection</b>    | IP67   |
| <b>Norm Conformity</b>         | CE, UL1598 listed, UL8750 listed   |


## PRODUCT SERIES

|                       |  |
|-----------------------|--|
| <b>10LIGHTC-G</b>     | Green LED column light for signaling applications                      |
| <b>10LIGHTC-Y</b>     | Yellow LED column light for signaling applications                     |
| <b>10LIGHTC-R</b>     | Red LED column light for signaling applications                        |
| <b>10LIGHTC-GA</b>    | Green LED column light with audible signal for signaling applications  |
| <b>10LIGHTC-YA</b>    | Yellow LED column light with audible signal for signaling applications |
| <b>10LIGHTC-RA</b>    | Red LED column light with audible signal for signaling applications    |
| <b>10LIGHTBRACKET</b> | LED SIGNAL LIGHT bracket   |
| <b>10PS12-24</b>      | UL / ULC Listed power supply   |



# LED SIGNAL MODULAR LIGHTS

UL LISTED, BUILD-YOUR-OWN LIGHTS AND AUDIBLE ALARM





## Highly Durable Indicators

UL Listed and IP65 rated to meet the needs of any application

## Adjustable Settings

Light units can be programmed to pulse at a rate of 1 ½ or 3 times per second or remain steady

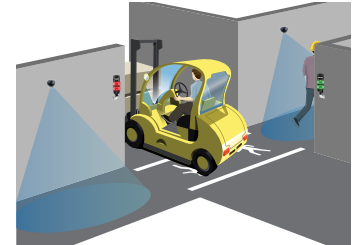

## Optional Alerts

Optional, audible alarm unit offers secondary alert method with chirp, siren, continuous, and 1 ½ beeps-per-second configuration settings

## Flexible Indication Solution

Base unit and bracket are designed for a variety of installation

## TECHNICAL SPECIFICATIONS

|                                |  |
|--------------------------------|--|
| <b>Supply Voltage</b>          | 12 – 30 VDC  |
| <b>Indicator Response Time</b> |  |
| Off Response                   | 150 µs at 12 – 30 VDC  |
| On Response                    | 180 mSec at 12 VDC; 50 mSec at 30 VDC  |
| <b>LED</b>                     | Red, green, yellow   |
| <b>Light Flash Rates</b>       | 1.5 Hz ±10%<br>3 Hz ±10%   |
| <b>Audible Alarm</b>           | 2.6 KHz ±250 Hz oscillation frequency;<br>maximum intensity 92 dB at 39.6 in |
| <b>Audible Adjustment</b>      | Rotate the alarm cover;<br>Open to closed is 8 db                            |
| <b>Connector</b>               | 78"<br>8-wire integral cable   |
| <b>Operating Temperature</b>   | -40 – 122 °F<br>95% at 122 °F maximum relative humidity<br>(non-condensing)  |
| <b>Degree Of Protection</b>    | NEMA 4 / IP65  |
| <b>Norm Conformity</b>         | CE, UL1598 Listed and UL8750 Listed  |
| <b>Dimensions</b>              |  |
| Base                           | 2 ¾" ø × 1 ⅜" (H)  |
| Light Segment                  | 2 ¾" ø × 2 ⅜" (H)  |
| Audible Segment                | 2 ¾" ø × 2 ¾" (H)  |

## PRODUCT SERIES

|                            |   |
|----------------------------|---|
| <b>10LIGHT-TBASE</b>       | LED Modular Signal Light, LED signal base                     |
| <b>10LIGHT-TR</b>          | LED Modular Signal Light - single color unit (red)            |
| <b>10LIGHT-TG</b>          | LED Modular Signal Light - single color unit (green)          |
| <b>10LIGHT-TW</b>          | LED Modular Signal Light - single color unit (white)          |
| <b>10LIGHT-TY</b>          | LED Modular Signal Light - single color unit (yellow)         |
| <b>10LIGHT-A</b>           | Modular, LED signal, audible segment                          |
| <b>10LIGHTBRACKET</b>      | LED Signal Light bracket                                      |
| <b>10LIGHTBRACKET-TL70</b> | LED Signal Light bracket - 30mm, 12 gauge SS, curved mounting |
| <b>10PS12-24</b>           | UL / ULC Listed power supply                                  |



# LED SIGNAL TRAFFIC LIGHTS


RUGGED, COST-EFFECTIVE SIGNALS FOR WARNING INDICATION SYSTEMS

## Standards Compliant

Single-light model rated IP67; double-light model rated IP65

## Highly Visible

Intense levels of light output for outdoor applications



## TECHNICAL SPECIFICATIONS

|                              |               |
|------------------------------|---------------|
| <b>Supply Voltage</b>        | 15 – 30 VDC   |
| <b>Indicators</b>            |               |
| Off Response                 | 10 ms max.    |
| On Response                  | 10 ms max.    |
| <b>LED</b>                   |               |
| One Indicator                | Red or green  |
| Two Indicator                | Red and green |
| <b>Connections</b>           | Field wired   |
| <b>Operating Temperature</b> | -40 – 122 °F  |
| <b>Material</b>              | PC            |
| <b>Degree of Protection</b>  |               |
| Single                       | IP67          |
| Double                       | IP65          |
| <b>Norm Conformity</b>       | CE            |



## Customizable

Controlled field of view for signage and narrow-lane use

## Dual-Indicator Modes

One- and two-indicator models available



## PRODUCT SERIES

|                    |                                     |
|--------------------|-------------------------------------|
| <b>10LIGHTS-G</b>  | Traffic, green LED signal light     |
| <b>10LIGHTS-R</b>  | Traffic, red LED signal light       |
| <b>10LIGHTS-RG</b> | Traffic, red/green LED signal light |
| <b>10PS12-24</b>   | UL / ULC Listed power supply        |



# ACCESS CONTROL PACKAGES


## SINGLE-DOOR APPLICATION PACKAGES

### Easy Ordering

Packages for request-to-exit applications

### Customizable

Package includes your choice of request-to-exit sensors, 600 or 1200 lb MAGLOCK, coupled with door logic and power

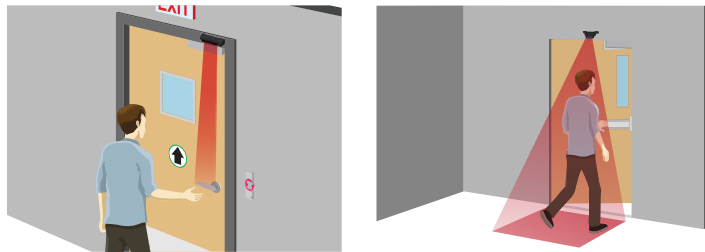

## PRODUCT SERIES

**10ACP12** Single Door Package 1 utilizes our R2E-100 with focused active infrared presence detection pattern for secure request-to-exit and a 1200 lb MAGLOCK

- (1) 10PS12-24 - UL power supply, filtered and regulated
- (1) 10MAGLOCK1UL - 1200 lb MAGLOCK (pg 80)
- (1) 10R2E100 - Request-to-Exit sensor (pg 31)
- (1) 10ACPBSS1 - "Push-to-Exit" button (pg 69)
- (1) 10BR3X - programmable, 3-relay, logic module (pg 49)

**10ACP12F** Single Door Package 2 utilizes our FLY with adjustable, passive infrared presence detection pattern for secure request-to-exit and a 1200 lb MAGLOCK

- (1) 10PS12-24 - UL power supply, filtered and regulated
- (1) 10MAGLOCK1UL - 1200 lb MAGLOCK (pg 80)
- (1) 10FLYKITB - Request-to-Exit sensor (pg 17)
- (1) 10ACPBSS1 - "Push-to-Exit" button (pg 69)
- (1) 10BR3X - programmable, 3-relay, logic module (pg 49)

### Easy Installation

Wiring diagram included



**10ACP6** Single Door Package 3 utilizes our R2E-100 with focused active infrared presence detection pattern for secure request-to-exit and a 600 lb MAGLOCK

- (1) 10PS12-24 - UL power supply, filtered and regulated
- (1) 10MAGLOCK3UL - 600 lb MAGLOCK (pg 82)
- (1) 10R2E100 - Request-to-Exit sensor (pg 31)
- (1) 10ACPBSS1 - "Push-to-Exit" button (pg 69)
- (1) 10BR3X - programmable, 3-relay, logic module (pg 49)

**10ACP6F** Single Door Package 4 utilizes our FLY with adjustable, passive infrared presence detection pattern for secure request-to-exit and a 600 lb MAGLOCK

- (1) 10PS12-24 - UL power supply, filtered and regulated
- (1) 10MAGLOCK3UL - 600 lb MAGLOCK (pg 82)
- (1) 10FLYKITB - Request-to-Exit sensor (pg 17)
- (1) 10ACPBSS1 - "Push-to-Exit" button (pg 69)
- (1) 10BR3X - programmable, 3-relay, logic module (pg 49)



# LOW-ENERGY PACKAGES

ALL-IN-ONE, REACTIVATION PACKAGES FOR LOW-ENERGY DOORS



## Easy Ordering

Convenient solution that includes secondary reactivation and enhanced door logic

## Logic Control

LE21 or BR3-X logic disables SUPERSCAN-T until the door is activated by a knowing act device

## Door Monitoring

Door position switch monitors state of door to enable / disable sensors



## PRODUCT SERIES

- LE PACKAGE 6**
- (1) 10SSTII (length) - SUPERSCAN-T II door-mounted, safety sensor (pg 32 – 34)
    - (1) primary, (1) secondary
    - 34 1/2" end cap to end cap (for 36" doors)
  - (1) 10BR3X programmable, 3-relay, logic module (pg 49)
  - (1) 10SWITCH75 magnetic, door position switch
    - 1/2" gap, NO / NC, SPDT
    - 7/16" diameter, flush mount

- LE PACKAGE 6 SECURITY**
- (1) 10SSTII (length) - SUPERSCAN-T II door-mounted, safety sensor (pg 32 – 34)
    - (1) primary, (1) secondary
    - 34 1/2" end cap to end cap (for 36" doors)
  - (1) 10BR3X programmable, 3-relay, logic module (pg 49)
  - (1) 10SWITCH75 magnetic, door position switch
    - 1/2" gap, NO / NC, SPDT
    - 7/16" diameter, flush mount




# PUSH PLATE PACKAGES

ALL-IN-ONE PACKAGE CONTAINING PUSH PLATES, WIRELESS TRANSMITTERS AND RECEIVERS, AND MOUNTING OPTIONS

## Customizable

Flexible solution offering variety of push plate, mounting, and wireless options

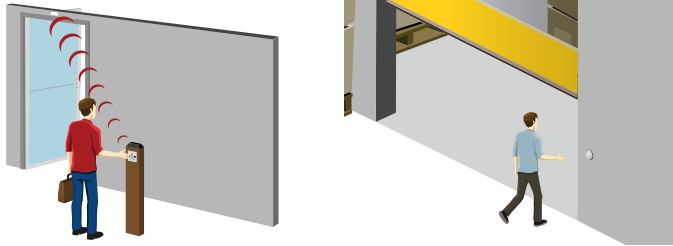

## One-Box Solution

Convenient solutions available



## PRODUCT SERIES

|   |  |
|---|--|
| <b>PANTHER 1</b>                          | (1) PANTHER plate, any style (pg 61)<br>(1) 10RD433 or 10RD433EH receiver (pg 53) or 10RD900 receiver (pg 54)  |
| <b>PANTHER 2</b>                          | (2) PANTHER plate, any style (pg 61)<br>(1) 10RD433 or 10RD433EH receiver (pg 53) or 10RD900 receiver (pg 54)  |
| <b>PUSH PLATE 1</b>                       | Choice of (1) PUSH PLATE, any style* (pg 56 – 63)<br>(1) Matching surface- or flush-mount box<br>(1) Receiver and (1) Transmitter, any frequency (pg 52 – 54)<br><i>*does NOT include LPR36, JAMB, VESTIBULE, PANTHER, or MAGIC SWITCH</i>     |
| <b>PUSH PLATE 2</b>                       | Choice of (2) PUSH PLATES, any style* (pg 56 – 63)<br>(2) Matching surface- or flush-mount boxes<br>(1) Receiver and (2) Transmitters, any frequency (pg 52 – 54)<br><i>*does NOT include LPR36, JAMB, VESTIBULE, PANTHER, or MAGIC SWITCH</i> |
| <b>PUSH PLATE 3</b>                       | Choice of (1) jamb PUSH PLATE, any style (pg 59)<br>(1) Matching surface-mount box<br>(1) Receiver and (1) Mini transmitter, any frequency (pg 52 – 54)  |
| <b>PUSH PLATE 4</b>                       | Choice of (2) jamb PUSH PLATES, any style (pg 59)<br>(2) Matching surface-mount boxes<br>(1) Receiver and (2) Mini transmitters, any frequency (pg 52 – 54)  |
| <b>PUSH PLATE 45 ONE-BOX SOLUTION</b>     | Choice of (2) 4 ½ in square PUSH PLATES, any style (pg 56)<br>(2) 4 ½" square, surface-mount boxes<br>(1) 433 MHz receiver and (2) 3-volt or 9-volt 433 MHz transmitters (pg 53)   |
| <b>PUSH PLATE 45 900 ONE-BOX SOLUTION</b> | Choice of (2) 4 ½ in square PUSH PLATES, any style (pg 56)<br>(2) 4 ½" square, surface-mount boxes<br>(1) 10TD900PB transmitter and (1) 10RD900 receiver (pg 54)   |

|                             |   |
|-----------------------------|---|
| <b>VESTIBULE 900</b>        | (1) 10PBDGP1 - Vestibule PUSH PLATE (pg 63)<br>(1) 4 ¾" square, surface-mount box<br>(2) PUSH PLATE options* with matching mounting boxes (pg 56 – 63)<br>(4) 10TD900PB - 3-volt transmitters and (2) 10RD900 receivers (pg 54)<br><i>*options include (2) PBS series, (2) PBS45 series, (2) PBS6 series, (2) PBR45 series, (2) PBR series or (2) PBJ series</i>                |
| <b>VESTIBULE PACKAGE</b>    | (1) 10PBDGP1 - Vestibule PUSH PLATE (pg 63)<br>(1) 4 ¾" square, surface-mount box<br>(2) PUSH PLATE options* with matching mounting boxes (pg 56 – 63)<br>(4) 3-volt OR 9-volt transmitters and (2) 10RD433 or 10RD433EH receivers (pg 53)<br><i>*options include (2) PBS series, (2) PBS45 series, (2) PBS6 series, (2) PBR45 series, (2) PBR series or (2) PBJ series</i>     |
| <b>VESTIBULE PACKAGE 9V</b> | (1) 10PBDGP1 - Vestibule PUSH PLATE (pg 63)<br>(1) 4 ¾" square, surface-mount box<br>(2) PUSH PLATE options* with matching mounting boxes (pg 56 – 63)<br>(4) 10TD433PB9V - 9-volt transmitters and (2) 10RD433 or 10RD433EH receivers (pg 53)<br><i>*options include (2) PBS series, (2) PBS45 series, (2) PBS6 series, (2) PBR45 series, (2) PBR series or (2) PBJ series</i> |



# SECURITY PUSH PLATE PACKAGES

CONVENIENT PACKAGES BUILT WITH BEA'S MOST POPULAR PUSH PLATES




## Customizable

Choose from these convenient one-box solutions that include our most popular mounting option, push plate artwork, and wireless transmitters and receivers

## One-Box Solutions

Packages available for vestibule and other common knowing-act applications

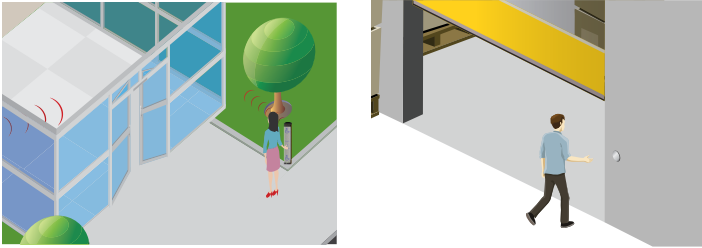

## PRODUCT SERIES

|                               |   |                              |  |
|-------------------------------|---|------------------------------|--|
| <b>PUSH PLATE 455-433</b>     | (2) 10PBS451 - square PUSH PLATES (pg 56)<br>(2) 10BOX455SQSM - surface-mount boxes<br>(2) 10TD433PB9V - 9-volt 433 MHz transmitter (pg 53)<br>(1) 10RD433 - 433 MHz receiver (pg 53) | <b>PUSH PLATE 6R-433</b>     | (2) 10PBR1 - round PUSH PLATES (pg 58)<br>(2) 10BOX6RNDMSM - surface-mount boxes<br>(2) 10TD433PB9V - 9-volt 433 MHz transmitter (pg 53)<br>(1) 10RD433 - 433 MHz receiver (pg 53)   |
| <b>PUSH PLATE 455-900</b>     | (2) 10PBS451 - square PUSH PLATES (pg 56)<br>(2) 10BOX455SQSM - surface-mount boxes<br>(2) 10TD900PB - 900 MHz transmitter (pg 54)<br>(1) 10RD900 - 900 MHz receiver (pg 54)          | <b>PUSH PLATE 6R-900</b>     | (2) 10PBR1 - round PUSH PLATES (pg 58)<br>(2) 10BOX6RNDMSM - surface-mount boxes<br>(2) 10TD900PB - 900 MHz transmitter (pg 54)<br>(1) 10RD900 - 900 MHz receiver (pg 54)  |
| <b>PUSH PLATE 455-BR2900</b>  | (2) 10PBS451 - square PUSH PLATES (pg 56)<br>(2) 10BOX455SQSM - surface-mount boxes<br>(2) 10TD900PB - 900 MHz transmitter (pg 54)<br>(1) 10BR2900 - 2-relay, logic module (pg 48)    | <b>PUSH PLATE 6R-BR2900</b>  | (2) 10PBR1 - round PUSH PLATES (pg 58)<br>(2) 10BOX6RNDMSM - surface-mount boxes<br>(2) 10TD900PB - 900 MHz transmitter (pg 54)<br>(1) 10BR2900 - 2-relay, logic module (pg 48)  |
| <b>PUSH PLATE 455-HW</b>      | (2) 10PBS451 - square PUSH PLATES (pg 56)<br>(2) 10BOX455SQSM - surface-mount boxes<br><b>HARDWIRED SOLUTION ONLY</b>   | <b>PUSH PLATE JAMB-433</b>   | (2) 10PBJ1 - jamb PUSH PLATES (pg 59)<br>(2) 10BOXJAMB5M - surface-mount boxes<br>(2) 10TD433PB9V - 9-volt 433 MHz transmitter (pg 53)<br>(1) 10RD433 - 433 MHz receiver (pg 56)   |
| <b>PUSH PLATE 475 EBA-900</b> | (2) 10PBS1 - square PUSH PLATES (pg 57)<br>(2) 10BOX475SQSMEBA - surface-mount boxes<br>(2) 10TD900PB - 900 MHz transmitter (pg 54)<br>(1) 10RD900 - 900 MHz receiver (pg 54)         | <b>PUSH PLATE JAMB-900</b>   | (2) 10PBJ1 - jamb PUSH PLATES (pg 59)<br>(2) 10BOXJAMB5M - surface-mount boxes<br>(2) 10TD900PB - 900 MHz transmitter (pg 54)<br>(1) 10RD900 - 900 MHz receiver (pg 54)  |
| <b>PUSH PLATE 475S-433</b>    | (2) 10PBS1 - square PUSH PLATES (pg 57)<br>(2) 10BOX475SQSM - surface-mount boxes<br>(2) 10TD433PB9V - 9-volt 433 MHz transmitter<br>(1) 10RD433 - 433 MHz receiver (pg 53)           | <b>VESTIBULE PACKAGE 433</b> | (1) 10PBDGP1 - vestibule PUSH PLATE (pg 63)<br>(1) 10BOX475SQSM - surface-mount boxes<br>(2) 10PBS1 with matching mounting boxes (pg 57)<br>(4) 10TD433PB9V - 9-volt 433 MHz transmitter (pg 53)<br>(2) 10RD433 - 433 MHz receiver (pg 53) |
| <b>PUSH PLATE 475S-900</b>    | (2) 10PBS1 - square PUSH PLATES (pg 57)<br>(2) 10BOX475SQSM - surface-mount boxes<br>(2) 10TD900PB - 900 MHz transmitter (pg 54)<br>(1) 10RD900 - 900 MHz receiver (pg 54)            | <b>VESTIBULE PACKAGE 900</b> | (1) 10PBDGP1 - vestibule PUSH PLATE (pg 63)<br>(1) 10BOX475SQSM - surface-mount boxes<br>(2) 10PBS1 with matching mounting boxes (pg 57)<br>(4) 10TD900PB - 900 MHz transmitter (pg 54)<br>(2) 10RD900 - 900 MHz receiver (pg 54)          |
| <b>PUSH PLATE 475S-BR2900</b> | (2) 10PBS1 - square PUSH PLATES (pg 57)<br>(2) 10BOX475SQSM - surface-mount boxes<br>(2) 10TD900PB - 900 MHz transmitter (pg 54)<br>(1) 10BR2900 - 2-relay, logic module (pg 48)      |                              |  |
| <b>PUSH PLATE 475S-HW</b>     | (2) 10PBS1 - square PUSH PLATES (pg 57)<br>(2) 10BOX475SQSM - surface-mount boxes<br><b>HARDWIRED SOLUTION ONLY</b>   |                              |  |




## REQUEST-TO-EXIT PACKAGES

CONVENIENT DOOR PACKAGES FOR REQUEST-TO-EXIT APPLICATIONS

### Customizable

Select your choice of MAGLOCK DS (available in either 600 or 1200 lb holding force) and your choice of BEA exit sensor (either R2E-100 or FLY Kit)

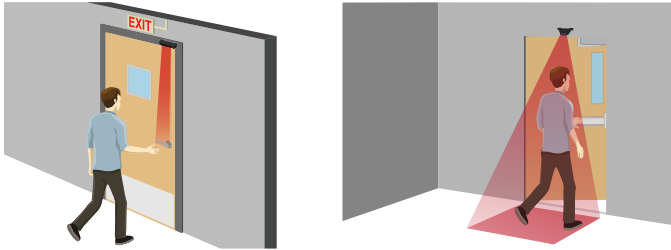

### PRODUCT SERIES

- |                  |   |
|------------------|---|
| <b>10ACP12DS</b> | <ul style="list-style-type: none"> <li>(1) 10R2E100 - UL / ULC Listed, active infrared request-to-exit detector specifically designed for access control applications (pg 31)</li> <li>(1) 10PS12-24 - UL, filtered and regulated power supply (pg 100)</li> <li>(1) 10ACPBSS1 - Push-to-Exit button (pg 69)</li> <li>(1) 10BR3X - programmable 3-relay logic module (pg 49)</li> <li>(1) 10MAGLOCK1ULDS - 1200 lb MAGLOCK (pg 81)</li> </ul> |
| <b>10ACP6DS</b>  | <ul style="list-style-type: none"> <li>(1) 10R2E100 - UL / ULC Listed, active infrared request-to-exit detector specifically designed for access control applications (pg 31)</li> <li>(1) 10PS12-24 - UL, filtered and regulated power supply (pg 100)</li> <li>(1) 10ACPBSS1 - Push-to-Exit button (pg 69)</li> <li>(1) 10BR3X - programmable 3-relay logic module (pg 49)</li> <li>(1) 10MAGLOCK3ULDS - 600 lb MAGLOCK (pg 83)</li> </ul>  |



### One-Box Solutions

Convenient packages offer superior pricing and whole-door solution

- |                   |   |
|-------------------|---|
| <b>10ACP12FDS</b> | <ul style="list-style-type: none"> <li>(1) 10FLYKITB - Request-to-Exit sensor (pg 17)</li> <li>(1) 10PS12-24 - UL, filtered and regulated power supply (pg 100)</li> <li>(1) 10ACPBSS1 - Push-to-Exit button (pg 69)</li> <li>(1) 10BR3X - programmable 3-relay logic module (pg 49)</li> <li>(1) 10MAGLOCK1ULDS - 1200 lb MAGLOCK (pg 81)</li> </ul> |
| <b>10ACP12FDS</b> | <ul style="list-style-type: none"> <li>(1) 10FLYKITB - Request-to-Exit sensor (pg 17)</li> <li>(1) 10PS12-24 - UL, filtered and regulated power supply (pg 100)</li> <li>(1) 10ACPBSS1 - Push-to-Exit button (pg 69)</li> <li>(1) 10BR3X - programmable 3-relay logic module (pg 49)</li> <li>(1) 10MAGLOCK3ULDS - 600 lb MAGLOCK (pg 83)</li> </ul>  |



# EMERGENCY ADD-ON KIT

FOR SINGLE-OCCUPANCY RESTROOMS



## For Outside Signaling

"ASSISTANCE REQUIRED" signal (LED + adjustable sounder)

## Combined Unit for Ease of Installation

"PUSH FOR EMERGENCY ASSISTANCE" button + indicator (LED + selectable sounder)

## Signage Available in English and French

Double-sided signage offers French and English emergency notice

## Code Compliant

Ontario Regulation 368 / 13 compliant



## TECHNICAL SPECIFICATIONS

### 10ARS

|                               |                               |
|-------------------------------|-------------------------------|
| <b>Lamp Voltage Rating</b>    | 28 VAC/VDC                    |
| <b>Sounder Voltage Rating</b> | 16 – 25 VAC/VDC               |
| <b>Sounder Current Rating</b> | 15 mA                         |
| <b>Lamps</b>                  | Miniature bayonet type (#313) |
| <b>Mounting</b>               | Fits standard single-gang     |
| <b>Sounder/Lamp Terminal</b>  | 2 pigtail wires (each)        |
| <b>Materials</b>              | Stainless steel and PC        |
| <b>Dimensions</b>             |                               |
| Single-gang faceplate         | 2 ¾" (W) x 4 ½" (H)           |
| White Lens (B-31695)          | 2 ¼" (W) x 4" (H) x 3 ⅛" (D)  |

### 10EBUTTONCOMBO

|                     |   |
|---------------------|---|
| <b>Voltage</b>      | 12 – 24 VAC/VDC ±10%                              |
| <b>Indication</b>   | Audible buzzer (selectable on/off) and visual LED |
| <b>Text Inserts</b> | 10  |
| <b>Button</b>       | E-stop button<br>Push on / Pull off               |

|                       |                                |
|-----------------------|--------------------------------|
| <b>Materials</b>      | Stainless steel and PC         |
| <b>Accessory</b>      | Rubber weather gasket included |
| <b>Certifications</b> | FCC                            |
| <b>Dimensions</b>     | 4 ½" (W) x 4 ½" (H)            |

### 70.5675

|                   |                              |
|-------------------|------------------------------|
| <b>Material</b>   | Polystyrene                  |
| <b>Dimensions</b> | 12" (W) x 5 ½" (H)           |
| <b>Language</b>   | Double-sided, French/English |

## PRODUCT SERIES

|                       |  |
|-----------------------|--|
| <b>10EMERGENCYKIT</b> | Emergency Add-On Kit includes:<br>(1) 70.5675, (1) 10EBUTTONCOMBO, and (1) 10ARS                 |
| <b>10ARS</b>          | "Assistance Required" Signal   |
| <b>70.5675</b>        | Emergency signage  |
| <b>10EBUTTONCOMBO</b> | "Push for Emergency Assistance"<br>Double Gang Button + Indicator                                |
| <b>10RESTROOMKIT</b>  | Restroom Kit includes:<br>(1) 10PTLBUTTON, (1) 10LEDSOUNDER,<br>(1) 10SWITCH1084, and (1) 10BR3X |
| <b>1012VAC</b>        | 12 VAC (20 VA) transformer   |
| <b>1024VAC</b>        | 24 VAC (40 VA) transformer   |



# RESTROOM KIT

FOR SINGLE-OCCUPANCY, NORMALLY LOCKED/UNLOCKED RESTROOMS



## Advanced Logic with Restroom Functionality

BR3-X (13-function advanced logic module) controls locking and sequencing functionality

## Highly Visible and Audible

Occupied Indicator with LED

## Visual Lock Confirmation

Push-to-Lock Button with LED



## Door Position Reset For Proper Functionality

Door position switch ensures proper positioning of the door before resetting the system

## Code Compliant

Ontario Regulation 368/13 compliant

## TECHNICAL SPECIFICATIONS

### 10BR3X

See page 49

### 10LEDSOUNDER

|                |   |
|----------------|---|
| Voltage        | 12 – 24 VAC/VDC ±10%                              |
| Indication     | Audible buzzer (selectable on/off) and visual LED |
| Text Inserts   | 10  |
| Material       | Stainless steel                                   |
| Certifications | FCC   |

### 10PTLBUTTON

|                          |               |
|--------------------------|---------------|
| Switch                   | SPST          |
| Voltage Max.             | 125 / 250 VAC |
| Current Max.             | 10 A          |
| Power Max.               | 373 W         |
| Electrical Configuration | SPDT          |

### High-volt Bulb

|               |                 |
|---------------|-----------------|
| Input voltage | 15 – 24 VAC/VDC |
| Current       | 0.06 A          |

### Low-volt Bulb

|               |                 |
|---------------|-----------------|
| Input voltage | 12 – 14 VAC/VDC |
| Current       | 0.19 A          |


|            |                                     |
|------------|-------------------------------------|
| Dimensions | 2 1/13" (W) × 4 1/2" (H) × 3/4" (D) |
|------------|-------------------------------------|

### 10SWITCH1084

|                          |                |
|--------------------------|----------------|
| Switching Voltage Max.   | 30 VAC/VDC     |
| Switching Current Max.   | 0.25 A         |
| Power Max.               | 3.0 W          |
| Electrical Configuration | SPDT           |
| Loop Type                | Open or closed |
| Gap Distance Max.        | 2"             |


## PRODUCT SERIES

|                       |   |
|-----------------------|---|
| <b>10RESTROOMKIT</b>  | Restroom Kit includes:<br>(1) 10PTLBUTTON<br>(1) 10LEDSOUNDER<br>(1) 10SWITCH1084<br>(1) 10BR3X |
| <b>10BR3X</b>         | 3-relay logic module  |
| <b>10LEDSOUNDER</b>   | Occupied indicator  |
| <b>10PTLBUTTON</b>    | "Push To Lock" button   |
| <b>10EMERGENCYKIT</b> | Emergency Add-On Kit includes:<br>(1) 70.5675<br>(1) 10EBUTTONCOMBO<br>(1) 10ARS                |
| <b>10MAGLOCK1UL</b>   | 1200 lb, single   |
| <b>10MAGLOCK3UL</b>   | 600 lb, single  |
| <b>10STRIKECU</b>     | UNIVERSAL CYLINDRICAL electric strike   |
| <b>10STRIKERE</b>     | RIM EXIT electric strike  |
| <b>10SWITCH1084</b>   | Door position switch  |
| <b>10PS12-24</b>      | UL / ULC Listed power supply  |
| <b>1012VAC</b>        | 12 VAC (20 VA) transformer  |
| <b>1024VAC</b>        | 24 VAC (40 VA) transformer  |



# PARALLAX PACKAGES

ALL-IN-ONE, ACTIVATION AND SAFETY PACKAGES FOR SWING DOORS

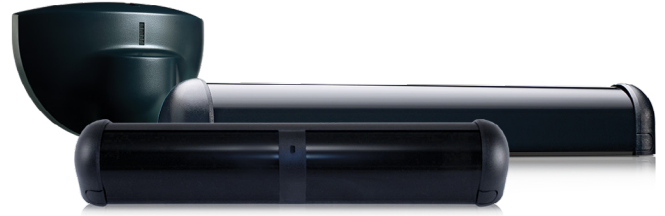


## All-Around Detection

Overhead motion detection with EAGLE, overhead presence detection with BODYGUARD-T (extension bracket included), door-mounted presence detection with SUPERSCAN T

## BODYGUARD-T Inhibition

Lock out module (sold separately) to inhibit header-mounted safety sensor (BODYGUARD-T) while door is closing

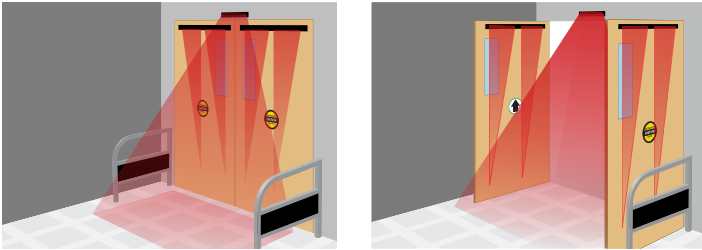

## PRODUCT SERIES

- |                    |  |
|--------------------|--|
| <b>PARALLAX I</b>  | <ul style="list-style-type: none"> <li>(1) 10EAGLE - Overhead activation sensor (pg 11)</li> <li>(1) 10BODYGUARDT - Header-mounted safety sensor (pg 16)</li> <li>(2) 10SSTII - SUPERSCAN-T II door-mounted safety sensor (pg 32 – 34)</li> <li>(1) 10BODYMNT - Spacer for BODYGUARD-T (pg 16)</li> <li>(1) 10SSQD - Quick-Disconnect Cable for SUPERSCAN-T (pg 32 – 34)</li> <li>(1) 1024VAC - Power supply (pg 100)</li> </ul> |
| <b>PARALLAX II</b> | <ul style="list-style-type: none"> <li>(1) 10EAGLE - Overhead activation sensor (pg 11)</li> <li>(1) 10BODYGUARDT - Header-mounted safety sensor (pg 16)</li> <li>(4) 10SSTII - SUPERSCAN-T II door-mounted safety sensor (pg 32 – 34)</li> <li>(1) 10BODYMNT - Spacer for BODYGUARD-T (pg 16)</li> <li>(2) 10SSQD - Quick-Disconnect Cable for SUPERSCAN-T (pg 32 – 34)</li> <li>(1) 1024VAC - Power supply (pg 100)</li> </ul> |

- |                            |  |
|----------------------------|--|
| <b>PARALLAX DE</b>         | <ul style="list-style-type: none"> <li>(2) 10EAGLE - Overhead activation sensor (pg 11)</li> <li>(2) 10BODYGUARDT - Header-mounted safety sensor (pg 16)</li> <li>(4) 10SSTII - SUPERSCAN-T II door-mounted safety sensor (pg 32 – 34)</li> <li>(2) 10BODYMNT - Spacer for BODYGUARD-T (pg 16)</li> <li>(2) 10SSQD - Quick-Disconnect Cable for SUPERSCAN-T (pg 32 – 34)</li> <li>(1) 1024VAC - Power supply (pg 100)</li> </ul> |
| <b>PARALLAX II DE LITE</b> | <ul style="list-style-type: none"> <li>(2) 10EAGLE - Overhead activation sensor (pg 11)</li> <li>(2) 10BODYGUARDT - Header-mounted safety sensor (pg 16)</li> <li>(2) 10SSTII - SUPERSCAN-T II door-mounted safety sensor (pg 32 – 34)</li> <li>(2) 10BODYMNT - Spacer for BODYGUARD-T (pg 16)</li> <li>(2) 10SSQD - Quick-Disconnect Cable for SUPERSCAN-T (pg 32 – 34)</li> <li>(1) 1024VAC - Power supply (pg 100)</li> </ul> |



# BOLLARDS


MOUNTING POST FOR PUSH PLATES

## Enhances Accessibility

Compatible with most push plate shapes and sizes, bollards provide a mounting surface for ADA-compliant actuators

## Versatile Mounting

Can be mounted either on existing concrete or in newly poured concrete

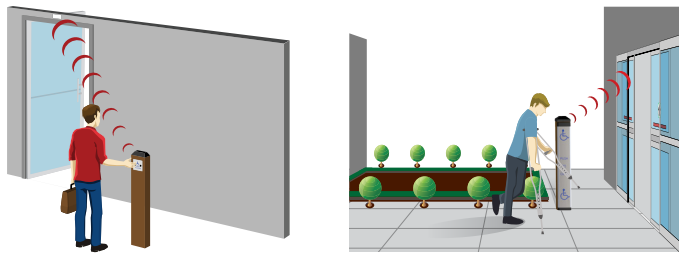


## Variety Of Styles Available

Available in silver, bronze, and black and with or without hole

## Wireless Compatibility

UV-resistant ABS plastic cap allows for transmission when using wireless transmitters

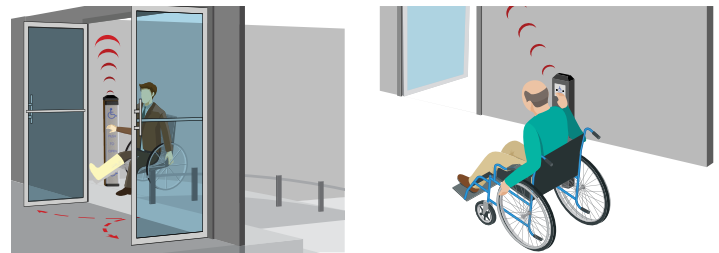

## TECHNICAL SPECIFICATIONS

|                              |   |
|------------------------------|---|
| <b>Dimensions (with cap)</b> | 41 1/2" (H) x 6 1/4" (W) x 4 1/4" (D)                         |
| <b>Materials</b>             |   |
| Post                         | Powder-coated, carbon steel (exterior + partial interior)     |
| Cap                          | UV-resistant ABS  |
| Bracket                      | Stainless steel   |
| <b>Push Plate</b>            | 4 1/2" square, 4 3/4" square (including PANTHER)              |
| <b>Compatibility*</b>        | Dual-vestibule, 4 1/2" round                                  |
| <b>Weight</b>                | 35 lb   |
| <b>Color</b>                 | Black, bronze, or silver                                      |
| <b>Hardware</b>              |   |
| Post                         | 1/2" x 13 UNC x 1" socket-head bolts (4) – 5/16" hex          |
| Cap                          | #6 x 3/4" sheet metal screws (3) and #6 finishing washers (3) |
| Bracket                      | 3" expansion anchors (4), lock washers (4), and nuts (4)      |

\* "Without hole" versions will accommodate 6" square and 6" round PANTHER plates as well as surface-mount card readers, keypads, or other surface-mount devices.

## PRODUCT SERIES

|                         |   |
|-------------------------|---|
| <b>10BOLLARDBLK*</b>    | Mounting post for stainless steel push plates (black)                                     |
| <b>10BOLLARDSLV*</b>    | Mounting post for stainless steel push plates (silver)                                    |
| <b>10BOLLARDBRZ*</b>    | Mounting post for stainless steel push plates (bronze)                                    |
| <b>10BOLLARDBLKWOH*</b> | Mounting post without pre-cut mounting holes (black)                                      |
| <b>10BOLLARDSLVWOH*</b> | Mounting post without pre-cut mounting holes (silver)                                     |
| <b>10BOLLARDBRZWOH*</b> | Mounting post without pre-cut mounting holes (bronze)                                     |
| <b>50.0073</b>          | Plastic, transmitter shelf for BOLLARD  |
| <b>50.5320</b>          | BOLLARD hardware pack includes:<br>Larger compression bolts<br>Undercut screws<br>Washers |
| <b>70.0195</b>          | BOLLARD cap   |
| <b>70.5022</b>          | U-shaped BOLLARD mounting bracket (bracket only), larger screw holes                      |

\* Hardware included.

# MOUNTING BOX EBA

MOUNTING BOX WITH EASY BATTERY ACCESS



## Unique Two-Piece Design


- Ensures easy installation
- Allows for quick battery replacement compared to standard mounting boxes
- Eliminates the need to disassemble the push plate from the back
- Improves wireless transmitter accessibility compared to small change-out compartments

## Convenient Access

Locking screw secures box to mounting plate

## Compatibility

Designed for BEA's most popular push plate design



## TECHNICAL SPECIFICATIONS

|                   |  |
|-------------------|--|
| <b>Dimensions</b> | 5 13/32" (W) x 5 13/32" (H) x 1 31/32" (D) |
| <b>Materials</b>  |  |
| Box               | ABS  |
| Locking Screw     | Stainless steel                            |

## PRODUCT SERIES

|                        |   |
|------------------------|---|
| <b>10BOX475SQSMEBA</b> | Mounting box with easy battery access   |
| <b>10PBS</b>           | 4 3/4" square push plate, "Push To Open" text only  |
| <b>10PBS1</b>          | 4 3/4" square push plate, "Push To Open" text and accessibility logo                      |
| <b>10PBSLL</b>         | 4 3/4" square push plate, accessibility logo only   |
| <b>10PBS10</b>         | 4 3/4" square push plate, plain   |
| <b>10PBSE</b>          | 4 3/4" square push plate, "Push To Exit" text only  |
| <b>10PBS1B</b>         | 4 3/4" square push plate, white on blue "Push To Open" text and accessibility logo        |
| <b>10PBS1SB</b>        | 4 3/4" square push plate, blue on satin brass "Push To Open" text and accessibility logo  |
| <b>10PBS1BB</b>        | 4 3/4" square push plate, blue on bright brass "Push To Open" text and accessibility logo |
| <b>10TD900PB</b>       | Hardwired transmitter   |
| <b>10TD433PB3V</b>     | Wired transmitter, with flag connectors, 1-button (3-volt battery)                        |
| <b>10TD433PB9V</b>     | Wired transmitter, with flag connectors, 1-button (9-volt battery)                        |
| <b>10PBBRACKET</b>     | Surface mount kit   |
| <b>10PBBRACKETCA</b>   | Surface mount kit, clear anodized   |
| <b>10WRSQ475</b>       | PBS series weather ring   |

# INSTALLATION ACCESSORIES

BEA'S LINE OF SUPPLEMENTAL DOOR ACCESSORIES

## PRODUCT SERIES

|                     |  |
|---------------------|--|
| <b>10DOORSWITCH</b> | On / Off / Hold Open switch  |
| <b>10DPG50</b>      | Door pressure gauge, 50 lbs  |
| <b>10REL12VAC</b>   | DPDT isolation relay<br>12 VAC only  |
| <b>10REL12VDC</b>   | DPDT isolation relay<br>12 VDC only  |
| <b>10REL24V</b>     | DPDT isolation relay<br>24 VAC only  |
| <b>10REL24VDC</b>   | DPDT isolation relay<br>24 VDC only  |
| <b>10REMOTE</b>     | Universal remote control for sensor setup  |
| <b>10SPOTFINDER</b> | Active-infrared-spot finder  |
| <b>10SWITCH75</b>   | Magnetic, door position switch<br>½" gap, NO / NC, SPDT<br>0.44" diameter, flush mount       |
| <b>10SWITCH1076</b> | Magnetic, door position switch<br>¾ to 2" gap, NO / NC, SPDT<br>0.875" diameter, flush mount |
| <b>10SWITCH1084</b> | Magnetic, door position switch<br>2" gap, NO, SPDT<br>surface mount with terminal strip      |
| <b>10SWITCH1277</b> | Magnetic, door position switch<br>½" gap, NO / NC, SPDT<br>0.375" diameter, flush mount      |
| <b>30.5580</b>      | Magnetic, door position switch<br>¾" gap, NO, SPST<br>0.375" diameter, flush mount           |
| <b>50.5283</b>      | Magnetic, door position switch<br>¾" gap, NO, SPST, flush mount                              |



**10DOORSWITCH**



**10DPG50**



**10RELXXX**



**10REMOTE**



**10SPOTFINDER**



**10SWITCH75**



**10SWITCH1076**



**10SWITCH1084**



**10SWITCH1277**



**30.5580**



**50.5283**



# JAMB CAM

JAMB-MOUNTED, COLOR VIDEO CAMERA




## High Resolution Video

Full-color video with resolution of 480 by 720 (480p)

## Visual Coverage of Door Threshold

Wide angle lens for complete view of door and traffic flow

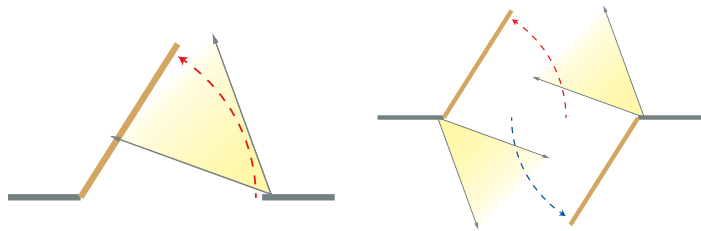


## Easy to Install

Integrated voltage regulator for installation convenience

## Low-Profile Camera

Low-profile design minimizes accidental damage from shopping carts and other errant objects

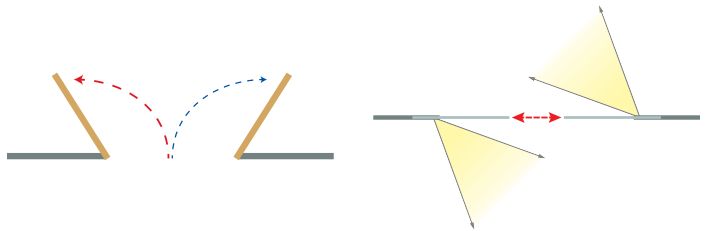

## TECHNICAL SPECIFICATIONS

|                               |   |
|-------------------------------|---|
| <b>Supply Voltage</b>         | 6.6 – 36 VDC; ±10%<br>6.0 – 28 VAC; ±10%                  |
| <b>Operating Temperatures</b> | -22 – 140 °F (relative humidity 95% max)<br>(-30 – 60 °C) |
| <b>Video Output</b>           | 1.0 (V <sub>p-p</sub> ) / 75 Ω                            |
| <b>Image Sensor</b>           | CMOS  |
| <b>Horizontal Resolution</b>  | 480 TVL   |
| <b>NTSC Output</b>            | 720 (H) × 480 (W)   |
| <b>Sync System</b>            | Inter-Sync  |
| <b>Frame Rate</b>             | 30 fps  |
| <b>Minimum Illumination</b>   | 0.01 LUX  |
| <b>AE Control</b>             | Auto  |
| <b>Gain Control</b>           | Auto  |
| <b>Electronic Shutter</b>     | 1 s ~ 1/10,000 s  |
| <b>S/N Ratio</b>              | > 50 dB   |
| <b>AWB</b>                    | Auto  |
| <b>Dimensions</b>             | 1 3/4" (W) × 3" (H) × 3/4" (D)                            |

## PRODUCT SERIES

|                   |                                     |
|-------------------|-------------------------------------|
| <b>10JAMBCAM</b>  | Jamb-mounted, color video camera    |
| <b>10IXIODT1V</b> | IXIO-DT1 with integrated video      |
| <b>20.5316</b>    | 14' camera harness and power supply |



# POWER SUPPLIES AND TRANSFORMERS

Can be used with select BEA products that require additional power

## TECHNICAL SPECIFICATIONS

### 10PS12-24

#### Output (Power Supply)

|                       |          |            |
|-----------------------|----------|------------|
| VDC                   | 12 VDC   | 24 VDC     |
| Switch Position       | SW1 open | SW1 closed |
| Max. Stand-by Load DC | 1.75 A   | 1.75 A     |
| Max. Alarm Load DC    | 1.75 A   | 1.75 A     |
| Battery (optional)    | 12 VDC   | 24 VDC     |

#### Output (Stand-by)

|  |                       |                       |
|--|-----------------------|-----------------------|
| VDC                                      | 12 VDC / 7 AH battery | 12 VDC / 7 AH battery |
| 4 Hr. of Stand-by and 5 Minutes of Alarm | Stand-by = 1.25 A     | Alarm = 1.25 A        |

**Input** 115 VAC / 60 Hz, 0.6 amp  
Fire alarm panel or access control trigger input

**Supervision** AC fail supervision (form "C" contacts)  
AC input and DC output LED indicators  
Short circuit and thermal overload protection  
Unit includes: power supply, transformer and enclosure

**Visual Indicators** AC input and DC output LED indicators

**Enclosure Dimensions** 7 1/2" (W) x 8 1/2" (H) x 3 1/2" (D)

**Norm Conformity** UL Listed (UL294), ULC Listed - CSA Standard C22.2, No.205-M1983, Signal Equipment, CSFM (California State Fire Marshal) Approved, MEA - NYC Dept. of Buildings Approved, NFPA 101 (Life Safety)

### 10PS12-24D

**Battery Backup** Maximum charge current: 400mA  
Automatic switch over to stand-by battery when AC fails

#### Output (Power Supply)

|                       |          |            |
|-----------------------|----------|------------|
| VDC                   | 12 VDC   | 24 VDC     |
| Switch Position       | SW1 open | SW1 closed |
| Max. Stand-by Load DC | 1.75 A   | 1.75 A     |
| Max. Alarm Load DC    | 1.75 A   | 1.75 A     |
| Battery (optional)    | 12 VDC   | 24 VDC     |

#### Output (Stand-by)

|  |                       |                       |
|--|-----------------------|-----------------------|
| VDC                                      | 12 VDC / 7 AH Battery | 12 VDC / 7 AH Battery |
| 4 Hr. of Stand-by and 5 Minutes of Alarm | Stand-by = 1.25 A     | Alarm = 1.25 A        |

**Battery not included**

**Output** Selectable 12 VDC or 24 VDC power limited outputs  
Class 2 Rated power limited outputs  
1.75 A continuous supply current at 12 VDC or 24 VDC

Filtered and electronically regulated output  
Short circuit and thermal overload protection

**Input** 115 VAC / 60 Hz, 0.6 A

**Supervision** AC fail supervision (form "C" contacts)  
Dry trigger output (form "C" contacts)

**Fire Alarm Interface** Dry trigger input

**Visual Indicators** AC input and DC output LED indicators

**Enclosure Dimensions** 13 1/2" (W) x 13" (H) x 3 1/4" (D)

**Norm Conformity** UL Listed for Access Control Systems (UL294), ULC Listed - CSA Standard C22.2



10PS12-24



10PS12-24D



10PSST242



10PSMDR2024



10PSVR5T



1012VAC



1024VAC

### 10PSVR5T

**Input** 24 VAC or 24 VDC  
**Output** 5 VDC (VR1TM5) or 12 VDC output.  
Filtered and electronically regulated output  
Built-in overload protection

**Visual Indicators** Power LED indicator

**Features** Modular connector/cable assembly facilitates ease of wiring  
Compact design allows for integration in a wide range of camera housings

**Enclosure Dimensions**  
VR5T / VR5BT 3 3/8" (W) x 1 1/8" (H) x 2 1/2" (D)  
All Other Units 1 1/8" (W) x 1" (H) x 2 3/8" (D)

**Degree of Protection** CE

### 10PSMDR2024

**Input**  
Voltage Range 85 – 264 VAC, 120 – 370 VDC  
Frequency Range 47 – 63 Hz

**Output**  
DC Voltage 24 V  
Rated Current 1A  
Rated Power 24 W

**Enclosure Dimensions** 7/8" (W) x 3 1/2" (H) x 4" (D)

## PRODUCT SERIES

|                    |   |
|--------------------|---|
| <b>10PS12-24</b>   | UL / ULC Listed power supply  |
| <b>10PS12-24D</b>  | UL / ULC Listed power supply with backup circuit (1.75 A) <i>battery NOT included</i> |
| <b>10PSMDR2024</b> | DIN rail power supply, 100 – 240 VAC / 24 VDC   |
| <b>10PSVR5T</b>    | Voltage regulator, 24 VAC / 24 VDC  |
| <b>1012VAC</b>     | 12 VAC (20 VA) transformer  |
| <b>1024VAC</b>     | 24 VAC (40 VA) transformer  |
| <b>10PSST242</b>   | Plug-in power supply  |



# WHERE TO FIND OUR SOLUTIONS

All over the world, people pass through automatic doors, gates and other transportation equipment every day. BEA offers a wide variety of convenient, safe and reliable solutions for on- and off-door applications. No matter the environment, sensing solutions can reduce energy costs, protect equipment and increase accessibility.

[WhereToFindBEA.com](http://WhereToFindBEA.com)



# INDEX

## A

ACCESS CONTROL PUSH BUTTON 69

## B

BEAMBOX 35

BODYGUARD-T 16

### BODYGUARD-T PARTS

adjustable mounting clips 16

cable, quick-disconnect 16

end caps and mounting screws 16

extrusion housing 16

harness, 8-conductor, 4.5' (see WIRING)

lens 16

light pipe and cover 16

pin connector, 7-position (see WIRING)

rain cover 16

relay harness (see WIRING)

spacer 16

BOLLARDS 63, 96

cap 96

hardware pack 96

mounting bracket 96

transmitter shelf 96

BR2-900 48

BR3-X 49, 94

## C

CABLE (see WIRING)

COLIBRI ONE 10

## D

DOOR POSITION SWITCHES 94, 98

DOOR PRESSURE GAUGE 98

DOOR SWITCH ON / OFF / HOLD OPEN 98

## E

EAGLE 11

EAGLE FAMILY PARTS 11

bezel to cover antenna 11

cable, 4-conductor (see WIRING)

ceiling adapter 11

harness, quick-disconnect 11

microwave antenna, narrow 11

microwave antenna, wide 11

mounting bracket adapter 11

rain cover (deluxe) 11

rain cover (standard) 11

replacement covers 11

spacer 11

spacer w/camera 11

EAGLE HM 11

### ELECTRIC STRIKES

cylindrical universal 72, 73, 94

rim exit 72, 73, 94

### ELECTROMAGNETIC LOCKS (see MAGLOCKS)

## F

FALCON FAMILY 12

FALCON harnesses (see WIRING)

FALCON EX FAMILY 13

FALCON EX harnesses (see WIRING)

FLY KIT 17

FLY KIT, extended relay time 17

### FLY KIT PARTS

cable, 4-conductor 17

### FOCUS FAMILY

FOCUS 18

FOCUS harness (see WIRING)

lens extrusion 18

FOCUS 2 18

FOCUS 2 harness (see WIRING)

lens extrusion 18

|                                   |           |
|-----------------------------------|-----------|
| <b>SMART FOCUS</b>                | <b>18</b> |
| SMART FOCUS surface-mount adapter | 18        |
| cable, 6-conductor w/socket       | 18        |

## G

|                             |           |
|-----------------------------|-----------|
| <b>GATELOCKS, UL LISTED</b> | <b>77</b> |
| "L" and "Z" brackets        | 77        |

## H

**HARNESS (see WIRING)**

## I

|  |                    |
|--|--------------------|
| <b>ISOLATION RELAYS</b>                | <b>98</b>          |
| <b>IS40</b>                            | <b>38</b>          |
| <b>IS40P</b>                           | <b>19</b>          |
| cable, 8-pin conductor (see WIRING)    |                    |
| <b>IS40XL</b>                          | <b>38</b>          |
| <b>IXIO-DT1</b>                        | <b>39</b>          |
| <b>IXIO-DT1 INDUSTRIAL</b>             | <b>40</b>          |
| <b>IXIO-DT1V</b>                       | <b>41, 99</b>      |
| <b>IXIO-ST</b>                         | <b>20</b>          |
| <b>IXIO-ST INDUSTRIAL</b>              | <b>21</b>          |
| <b>IXIO FAMILY PARTS</b>               |                    |
| bracket accessory                      | 20, 21, 39, 40, 41 |
| camera harness (see HARNESS)           |                    |
| ceiling accessory                      | 20, 21, 39, 40     |
| cover and power supply harness, DT1V   | 41                 |
| curved door accessory                  | 20, 21, 39, 40, 41 |
| rain accessory                         | 20, 21, 39, 40     |
| harness, 10'                           | 20, 21, 39, 40     |
| harness, 30'                           | 20, 21, 39, 40     |
| harness, Optex conversion (see WIRING) |                    |
| microwave antenna, narrow              | 39, 40, 41         |
| microwave antenna, wide                | 39, 40, 41         |
| replacement cover                      | 20, 21, 39, 40     |
| spacer                                 | 20, 21, 39, 40, 41 |

## J

|                             |           |
|-----------------------------|-----------|
| <b>JAMB CAM</b>             | <b>99</b> |
| camera harness (see WIRING) |           |

## K

|                                     |        |
|-------------------------------------|--------|
| <b>KEYPADS</b>                      |        |
| SLIMLINE KEYPAD                     | 84     |
| UNIVERSAL KEYPAD                    | 84     |
| <b>KEYSWITCHES</b>                  |        |
| COMBO PLATE, jamb                   | 74     |
| KEYSWITCH, jamb                     | 74     |
| KEYSWITCH, single gang              | 74     |
| momentary switch                    | 74     |
| mortise cylinder, keyed alike       | 71, 74 |
| mortise cylinder, keyed differently | 71, 74 |
| on/off switch                       | 74     |

## L

|                                       |               |
|---------------------------------------|---------------|
| <b>LED SIGNAL LIGHTS</b>              |               |
| column                                | 85            |
| modular                               | 86            |
| traffic                               | 87            |
| <b>LOCK-OUT MODULE</b>                |               |
| lock-out harness (see WIRING)         |               |
| lock-out relay, low-energy            | 16, 50        |
| lock-out relay, PARALLAX              | 50            |
| <b>LZR®-FLATSCAN SW</b>               | <b>22, 23</b> |
| harness, control (see WIRING)         |               |
| replacement cover                     | 23            |
| safety system, full-energy swing-door | 23            |
| safety system, low-energy swing-door  | 23            |
| sensor                                | 23            |
| <b>LZR®-FLATSCAN 3D SW</b>            | <b>24</b>     |
| harness, control (see WIRING)         |               |
| replacement cover                     | 24            |
| sensor                                | 24            |



# INDEX

|  |                |
|--|----------------|
| <b>LZR®-FLATSCAN SW PARTS</b>                    |                |
| glass door accessory                             | 23, 24         |
| spacer   | 23, 24         |
| harness, primary/secondary (see WIRING)          |                |
| harness, Sentrex retrofit (see WIRING)           |                |
| <b>LZR®-H100</b>                                 | 25             |
| <b>LZR®-I30</b>                                  | 26             |
| <b>LZR®-MICROSCAN T</b>                          | 27, 28         |
| cable, "Y"                                       | 28             |
| door kit, glass / fire door                      | 27             |
| door kit, pair / dual-egress                     | 27             |
| door kit, single                                 | 27             |
| door kit, universal                              | 27             |
| end cap  | 28             |
| harness, power supply (see WIRING)               |                |
| harness, EAGLE (see WIRING)                      |                |
| harness, control (see WIRING)                    |                |
| harness, system (see WIRING)                     |                |
| harness, secondary for mounting kit (see WIRING) |                |
| harness, plug-and-play (see WIRING)              |                |
| harness, primary/secondary (see WIRING)          |                |
| harness, secondary (see WIRING)                  |                |
| hub  | 28             |
| jamb cap   | 28             |
| loop, door cord                                  | 28             |
| mounting kit, center-pivot                       | 27             |
| ON / OFF / HOLD OPEN switch                      | 28             |
| ON / OFF / HOLD OPEN switch jumper               | 28             |
| sensor   | 28             |
| screws, end cap                                  | 28             |
| screws, spacer                                   | 28             |
| spacer   | 28             |
| switch, 2-wire                                   | 28             |
| switch, home                                     | 28             |
| Velcro tabs                                      | 28             |
| <b>LZR®-S600</b>                                 | 29             |
| <b>LZR®-U920</b>                                 | 46             |
| <b>LZR®-U921</b>                                 | 46             |
| <b>LZR®-WIDESCAN</b>                             | 44             |
| adapter plate kit                                | 44             |
| cable, 30'                                       | 44             |
| cable, 50'                                       | 44             |
| replacement base                                 | 44             |
| replacement cover                                | 44             |
| <b>M</b>   |                |
| <b>MAGLOCKS</b>                                  |                |
| DELAYED-EGRESS KIT                               | 71             |
| DELAYED-EGRESS KIT signage                       | 71             |
| DOUBLE 600 LB                                    | 82             |
| DOUBLE 600 LB W/DS                               | 83             |
| DOUBLE 1200 LB                                   | 80             |
| DOUBLE 1200 LB W/DS                              | 81             |
| CABINET, SINGLE                                  | 70             |
| SINGLE 600 LB                                    | 82, 94         |
| SINGLE 600 LB W/DS                               | 83             |
| SINGLE 1200 LB                                   | 80, 94         |
| SINGLE 1200 LB W/DS                              | 81             |
| <b>MAGLOCKS PARTS</b>                            |                |
| bracket kit, glass mounting                      | 80, 81, 82, 83 |
| cover plates (DS only)                           | 81, 83         |
| filler plates                                    | 80, 81, 82, 83 |
| "L" and "Z" brackets                             | 80, 81, 82, 83 |
| rim housings                                     | 80, 81, 82, 83 |
| screw pack                                       | 80, 81, 82, 83 |
| spacers  | 80, 81, 82, 83 |
| <b>MATRIX FAMILY</b>                             |                |
| loop detector, dual                              | 51             |
| loop detector, single                            | 51             |
| MATRIX harness (see WIRING)                      |                |
| socket, DIN rail                                 | 51             |
| <b>MICROCELL ONE</b>                             | 30             |
| control box                                      | 30             |

|                      |    |
|----------------------|----|
| emitter/receiver set | 30 |
| jamb cap kit         | 30 |
| Optex adapter kit    | 30 |

## MOUNTING BOXES AND ACCESSORIES

|   |        |
|---|--------|
| double-gang, surface-mount              | 63     |
| easy battery access                     | 63, 97 |
| PBRJ series, flush-mount                | 59     |
| PBRJ series, surface-mount              | 59     |
| PBJMS series, surface-mount (hardwired) | 59     |
| PBR6 series, flush-mount, round         | 58     |
| PBR6 series, surface-mount, round       | 58     |
| PBR/PBS series, mount kits              | 58, 97 |
| PBS series, flush-mount, square         | 57, 63 |
| PBS series, flush-mount, round          | 57, 63 |
| PBS series, weather ring                | 57, 97 |
| PBS45 series, escutcheon                | 56     |
| PBS45 series, flush-mount, round        | 56     |
| PBS45 series, flush-mount, square       | 56     |
| PBS45 series, surface-mount, round      | 56     |
| PBS45 series, surface-mount, square     | 56     |
| PBS45 series, weather ring              | 56     |
| PBS6 series, flush-mount, square        | 58     |
| PBS6 series, surface-mount, square      | 58     |
| PBS6 series, weather ring               | 58     |
| single-gang, surface-mount              | 62, 75 |

## MOUNTING BRACKETS

|                                 |   |
|---------------------------------|---|
| mounting bracket, industrial    | 11, 12, 13, 15,<br>19, 26, 29, 38, 44             |
| mounting bracket, LZR accessory | 25, 26, 29  |
| mounting bracket, mini          | 11, 12, 19, 20, 21, 26,<br>29, 38, 39, 40, 41, 44 |
| mounting bracket, universal     | 44  |

|                                       |           |
|---------------------------------------|-----------|
| <b>MS09</b>                           | <b>64</b> |
| <b>MS21</b>                           | <b>65</b> |
| isolation module harness (see WIRING) |           |
| <b>MS31</b>                           | <b>66</b> |
| faceplates                            | 67        |
| <b>MS41</b>                           | <b>68</b> |

## P

### PACKAGES, ACCESS CONTROL

|                                |    |
|--------------------------------|----|
| AC + FLY Kit + 600 lb MAGLOCK  | 88 |
| AC + FLY Kit + 1200 lb MAGLOCK | 88 |
| AC + R2E-100 + 600 lb MAGLOCK  | 88 |
| AC + R2E-100 + 1200 lb MAGLOCK | 88 |

### PACKAGES, LOW-ENERGY REACTIVATION

|                       |    |
|-----------------------|----|
| LE Package 6          | 89 |
| LE Package 6 Security | 89 |

### PACKAGES, PARALLAX

|                     |    |
|---------------------|----|
| PARALLAX I          | 95 |
| PARALLAX II         | 95 |
| PARALLAX DE         | 95 |
| PARALLAX II DE LITE | 95 |

### PACKAGES, PUSH PLATE

|                      |    |
|----------------------|----|
| PANTHER              | 90 |
| PUSH PLATE           | 90 |
| PUSH PLATE 45        | 90 |
| PUSH PLATE 45 900    | 90 |
| VESTIBULE 900        | 90 |
| VESTIBULE PACKAGE    | 90 |
| VESTIBULE PACKAGE 9V | 90 |

### PACKAGES, REQUEST-TO-EXIT

|                                   |    |
|-----------------------------------|----|
| AC + FLY Kit + 600 lb MAGLOCK DS  | 92 |
| AC + FLY Kit + 1200 lb MAGLOCK DS | 92 |
| AC + R2E-100 + 600 lb MAGLOCK DS  | 92 |
| AC + R2E-100 + 1200 lb MAGLOCK DS | 92 |

### PACKAGES, RESTROOM KIT

|   |        |
|---|--------|
| button + indicator, "Push For Emergency Assistance" | 93     |
| button, "Push To Lock"                              | 94     |
| emergency add-on kit                                | 93, 94 |
| emergency add-on kit, signage                       | 93     |
| indicator, "Assistance Required"                    | 93     |
| indicator, "Occupied When Lit"                      | 94     |
| restroom kit  | 93, 94 |

# INDEX

## PACKAGES, SECURITY PUSH PLATE

|                        |    |
|------------------------|----|
| PUSH PLATE 45S-433     | 91 |
| PUSH PLATE 45S-900     | 91 |
| PUSH PLATE 45S-BR2900  | 91 |
| PUSH PLATE 45S-HW      | 91 |
| PUSH PLATE 475 EBA-900 | 91 |
| PUSH PLATE 475S-433    | 91 |
| PUSH PLATE 475S-900    | 91 |
| PUSH PLATE 475S-BR2900 | 91 |
| PUSH PLATE 475S-HW     | 91 |
| PUSH PLATE 6R-433      | 91 |
| PUSH PLATE 6R-900      | 91 |
| PUSH PLATE 6R-BR2900   | 91 |
| PUSH PLATE JAMB-433    | 91 |
| PUSH PLATE JAMB-900    | 91 |
| VESTIBULE PACKAGE 433  | 91 |
| VESTIBULE PACKAGE 900  | 91 |

|             |    |
|-------------|----|
| PHOENIX EX™ | 14 |
|-------------|----|

|              |    |
|--------------|----|
| PIEZO BUTTON | 75 |
|--------------|----|

## PNEUMATIC PUSH BUTTONS

|                  |    |
|------------------|----|
| jamb, 1 5/8 in   | 76 |
| jamb, 2 in       | 76 |
| single, 1 5/8 in | 76 |
| single, 2 in     | 76 |

## POWER SUPPLIES

|                                 |   |
|---------------------------------|---|
| power supply, DIN rail          | 25, 26, 29, 44, 46, 100                                     |
| power supply, UL/ULC listed     | 26, 29, 51, 71, 77, 80, 81, 82, 83, 85, 86, 87, 88, 94, 100 |
| power supply, voltage regulator | 26, 29, 46, 100   |
| power supply, universal kit     | 28  |

|                   |    |
|-------------------|----|
| PUSH PLATES, JAMB | 59 |
|-------------------|----|

|                    |    |
|--------------------|----|
| PUSH PLATES, LPR36 | 60 |
|--------------------|----|

|                               |    |
|-------------------------------|----|
| cap kit                       | 60 |
| converter to 433 MHz wireless | 60 |
| converter to 900 MHz wireless | 60 |

|                      |    |
|----------------------|----|
| PUSH PLATES, PANTHER | 61 |
|----------------------|----|

|                       |    |
|-----------------------|----|
| spare PCB, 433 series | 61 |
|-----------------------|----|

|                       |    |
|-----------------------|----|
| spare PCB, 900 series | 61 |
|-----------------------|----|

|                          |    |
|--------------------------|----|
| PUSH PLATES, SINGLE GANG | 62 |
|--------------------------|----|

(see MOUNTING BOXES)

|                        |    |
|------------------------|----|
| PUSH PLATES, VESTIBULE | 63 |
|------------------------|----|

(see MOUNTING BOXES)

|                    |    |
|--------------------|----|
| PUSH PLATE, 4.5 IN | 56 |
|--------------------|----|

(see MOUNTING BOXES)

|                     |    |
|---------------------|----|
| PUSH PLATE, 4.75 IN | 57 |
|---------------------|----|

screw kit 57

(see MOUNTING BOXES)

|                  |    |
|------------------|----|
| PUSH PLATE, 6 IN | 58 |
|------------------|----|

screw kit 58

(see MOUNTING BOXES)

## R

|         |    |
|---------|----|
| R2E-100 | 31 |
|---------|----|

|                            |  |
|----------------------------|--|
| REMOTE CONTROL (UNIVERSAL) | 11, 12, 13, 14, 15, 16, 19, 20, 21, 25, 26, 29, 35, 38, 39, 40, 41, 44, 45, 98 |
|----------------------------|--|

## S

|         |    |
|---------|----|
| SPARROW | 15 |
|---------|----|

|            |                |
|------------|----------------|
| SPOTFINDER | 19, 35, 38, 98 |
|------------|----------------|

|             |    |
|-------------|----|
| SUPERSCAN-T | 32 |
|-------------|----|

|                        |    |
|------------------------|----|
| SUPERSCAN-T INDUSTRIAL | 33 |
|------------------------|----|

## SUPERSCAN-T / INDUSTRIAL PARTS

adjustable mounting clips 34

door cord jamb cap and screw 34

door cord sheath 34

end cap kit 34

primary unit, no housing 34

secondary unit, no housing 34

hardware kit 34

harness, quick-disconnect (see WIRING)

harness, Gyrotech relay (see WIRING)

harness, Horton relay (see WIRING)

harness, primary (see WIRING)

|                                      |                        |  |            |
|--------------------------------------|------------------------|--|------------|
| housing, aluminum                    | 34                     | cable, 6-conductor (SMART FOCUS)                 | 18         |
| lens                                 | 34                     | cable, 4-conductor (FLY KIT)                     | 17         |
| ribbon connector                     | 34                     | cable, 8-pin conductor (IS40/P/XL)               | 19, 38     |
| <b>T</b>                             |                        | harness, 8-conductor                             | 16, 26, 29 |
| <b>TRANSFORMERS</b>                  |                        | harness, 11-pin (MATRIX)                         | 51         |
| transformers, 12 VAC                 | 93, 94, 100            | harness, 48 in (FOCUS)                           | 18         |
| transformers, 24 VAC                 | 93, 94, 100            | harness, 240 in (FOCUS)                          | 18         |
| <b>U</b>                             |                        | harness, camera (IXIO-DT1V)                      | 41         |
| <b>ULTIMO</b>                        |                        | harness, camera (JAMB CAM)                       | 99         |
| replacement cover                    | 45                     | harness, control                                 | 28         |
| <b>W</b>                             |                        | harness, control (LZR®-FLATSCAN 3D SW)           | 24         |
| <b>WIRELESS, 300 MHZ FAMILY</b>      |                        | harness, control (LZR®-FLATSCAN SW)              | 23         |
| battery                              | 52                     | harness, EAGLE                                   | 28         |
| receiver, analog                     | 52, 60                 | harness, FALCON / FALCON EX                      | 12, 13     |
| transmitter, hand-held               | 52                     | harness, isolation module                        | 65         |
| transmitter, wired w/flag connectors | 52                     | harness, lock-out relay                          | 16, 50     |
| <b>WIRELESS, 433 MHZ FAMILY</b>      |                        | harness, Optex conversion                        | 39, 40     |
| battery                              | 53                     | harness, plug-and-play                           | 28         |
| receiver, analog                     | 53, 60                 | harness, power supply                            | 28         |
| receiver, analog, extended hold      | 53, 60                 | harness, primary/secondary                       | 28         |
| transmitter, hand-held               | 53                     | harness, primary/secondary (LZR®-FLATSCAN 3D SW) | 24         |
| transmitter, keychain                | 53                     | harness, relay (BODYGUARD/SUPERSCAN)             | 16         |
| transmitter, mini hardwired          | 53                     | harness, secondary                               | 28         |
| transmitter, wired w/flag connectors | 53, 97                 | harness, secondary for mounting kit              | 28         |
| <b>WIRELESS, 900 MHZ FAMILY</b>      |                        | harness, Sentrex retrofit                        | 23, 24     |
| battery                              | 54                     | harness, system                                  | 28         |
| receiver                             | 54, 60, 64, 65, 66     |  |            |
| transmitter, hand-held               | 48, 54                 |  |            |
| transmitter, retrofit                | 48, 54, 64, 65, 66, 68 |  |            |
| transmitter, universal               | 48, 54                 |  |            |
| transmitter, wired w/flag connectors | 54, 97                 |  |            |
| <b>WIRING</b>                        |                        |  |            |
| 4-conductor cable (EAGLE)            | 11                     |  |            |
| 7-position pin connector             | 16                     |  |            |



# CONTINUED EDUCATION

---

BEA has trained thousands of technicians and industry professionals on a wide range of topics surrounding the safety, detection and security of automatic doors.

BEA is a member of the American Association of Automatic Door Manufacturers (AAADM) and is listed as a certified trainer by AAADM. Additionally, our Sensor Integration School offers a comprehensive program designed to educate technicians on the integration of sensors and devices with automatic doors. BEA's highly trained staff are capable of providing the most effective and complete service possible.

**Visit our site to learn more:**

[BEAsensors.com/en/trainings](https://BEAsensors.com/en/trainings)

**REGISTER ONLINE**





GROWING A  
**SAFE AUTOMATED WORLD,  
CREATING PEACE OF MIND**  
FOR EVERYONE, EVERYWHERE

A **Halma** company

**BEA Americas** / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA / 15275-1213  
800 523 2462 / [info-us@BEAsensors.com](mailto:info-us@BEAsensors.com) / [BEAsensors.com](http://BEAsensors.com)