



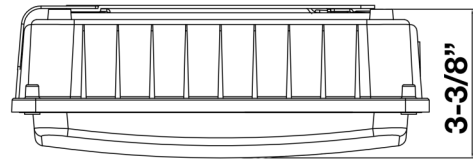



# ULTRATHIN CANOPY SURFACE MOUNT 45W

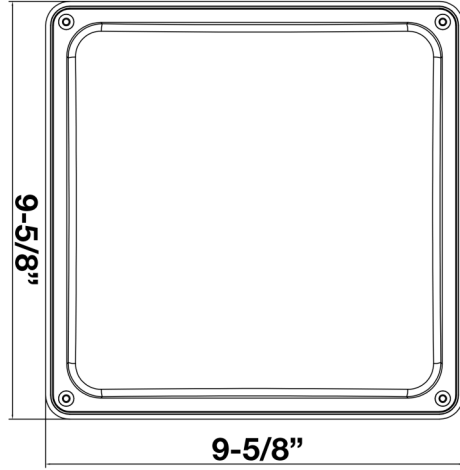

- Features:
- Thin Appearance
  - Good Heat Dissipation
  - Convenient Installation
  - Pendant or Surface Mount
  - Long Life high Efficiency LEDs

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Lumens/Watt	DLC#
71601B	White	45W	5000	4000K	120-277	0-10V	110	PLYW1FZ3V46A

**PHOTOMETRY**

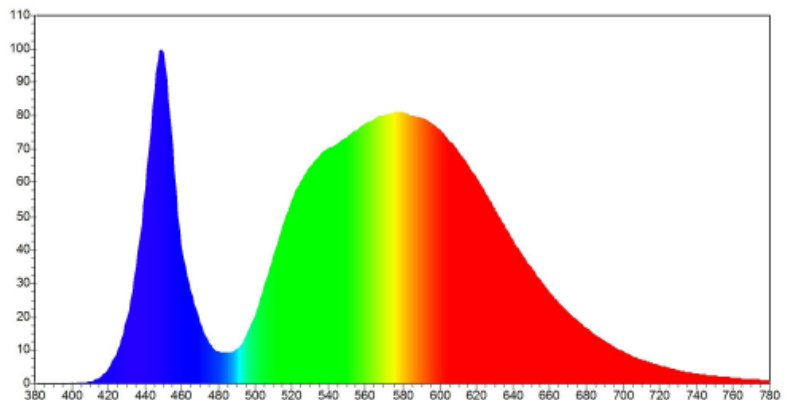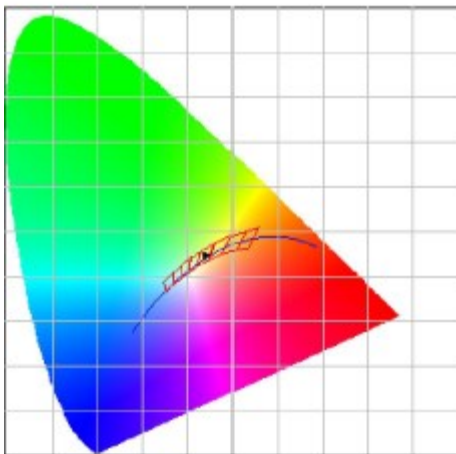



# ULTRATHIN CANOPY SURFACE MOUNT 45W

## Technical Specifications:

### **Electrical:**

Input Voltage: 120 thru 277

Current: .378A@120V; .189A@277V

Frequency: 60Hz

Power Factor:  $\geq$ .9

### **Product Parameters:**

45 Watts

Efficacy: 110 lumens per watt

50,000+ LED Life Span

CCT: 4000k (Neutral White)

### **Chromacity Measurements:**

Beam Angle: 140°

BUG Rating: N/A

CRI:  $\geq$  70

R9: -26.4

DUV: 0.0042

Chromaticity (x,y): x=.3764; y= .3833

Chromaticity (u,v): u=.2199; v= .3359

### **Component Specifications:**

LED: SSC3030

Driver: 120-277V 50-60HZ

Driver Output Volts: 120-277

Driver Output Amps: 132mA

Surge Protection: 10000V

**Dimming:** 0-10V

### **Operating Temperature:**

Minimum Starting -31° - 122° F

### **Construction:**

Housing: Aluminum Housing

Powder Coat White Finish

IP Rating: IP65 Wet Location Rated

Lens Material: Prismatic Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: ETL

DLC#: PLYW1FZ3V46A

Carton Qty: 1

Weight: 8 lb

### **Warranty:**

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).